



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## XDS100v2 USB JTAG Emulator



**Documentation**  
Installation Guide  
[Support](#)

**Application**  
Software Debug

**Warranty:** 30 days from date of purchase

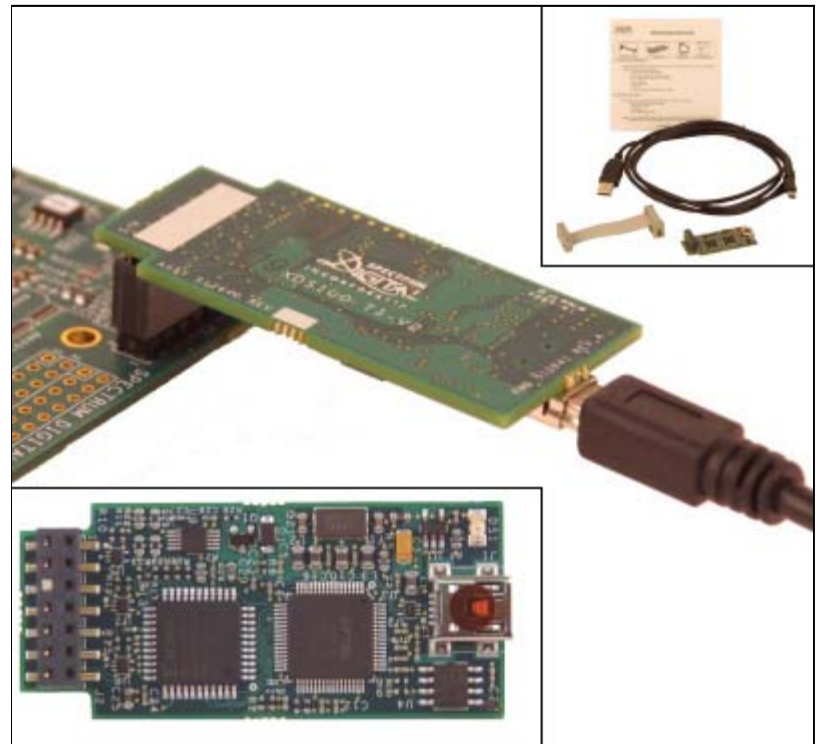

**Part #:** 702302

### XDS100v2 USB JTAG Emulator

#### Hardware Features

- Supports Texas Instruments Processors and Microcontrollers with JTAG interface:
  - F28xx
  - C674x
  - C64x+
  - ARM9
  - C54xx
  - C55xx
  - Cortex™
- Supports Embedded Trace Buffer (ETB) on selected TI devices

#### Software Features

- Compatible with Code Composer Studio IDE™ from Texas Instruments version v4
- Supports UniFlash™ programming utility from Texas Instruments
- Compatible with Windows XP, Vista, Win7, and Linux Operating Systems

#### What's Included

- XDS100v2 USB JTAG Emulator
- USB cable
- 14-pin JTAG extender cable
- Quick Start Guide

#### You May Need

- Code Composer Studio™

- USB Bus Powered
- Supports USB 2.0 (480mbps)
- Compatible with +1.8V or +3.3V JTAG Interfaces.
- Supports targets with 14-pin JTAG Header.
- Dimensions: 2.22"L x 1."W Low Profile
- 14-pin JTAG Header
- RoHS Compliant

**Additional Details**

- Current XDS100v2 product details may be found at:  
[XDS100v2 Wiki](#)

- 14 pin to 20 pin CTI JTAG adapter, part# 701212