

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








ROHS COMPLIANT PRODUCT DATA DRAWING

	REVISION HISTORY	REVISION HISTORY	
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46701	08/17	GPF

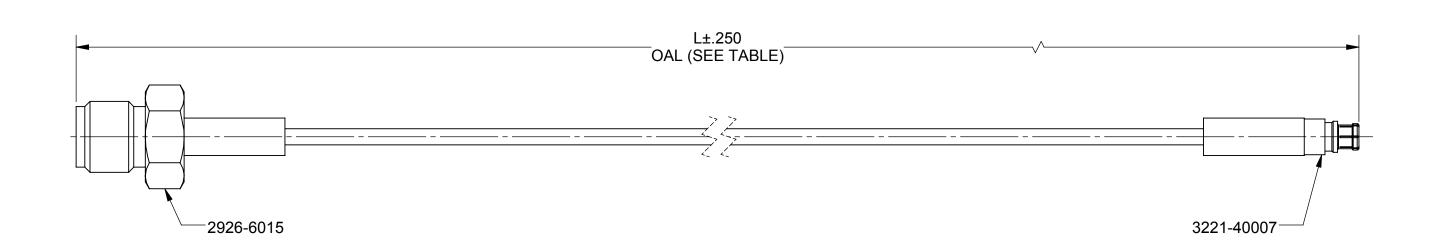

MATERIAL:

CONNECTORS: SMA STRAIGHT FEMALE (2926-6015)

SMPM STRAIGHT FEMALE (3221-40007)

STANDARD FLEXTRA CABLE (200-70-214) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHZ

SV P/N	L (OAL)
7029-2558	6.000"
7029-2559	12.000"
7029-2560	24.000"

MATERIAL:	SEE NOTES	
FINISH:	SEE NOTES	
SURFACE AREA: N/A		
PROPRIETARY		
IS THE SOLE P ANY REPRODU	TION CONTAINED IN THIS DRAWIN ROPERTY OF SV MICROWAVE, IN CTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF	

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010
.XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

.XXX ±.005 TERPRET DIMENSIONS AND TOLERANCES ER ASME Y14.5M - 1994	5) SURFACE ROUGHNESS 63 MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		
THIRD ANGLE PROJECTION	DRAWN:	VB 08/04/17	
	CHECKED:	GPF 08/04/17	

APPROVED:

UNLESS OTHERWISE SPECIFIED

GPF 08/04/17

		ICROWAVE
2	2400 Centrepark W	/est Drive, Suite 100 each, FL 33409

SMA FEMALE TO SMPM FEMALE FOR .047 CABLE ASSEMBLY

SIZE CAGE CODE DWG. NO. B 95077 7029-2558-2560 SCALE: 1:1