



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/05/00	PS
B	REDRAW, RFS. 3964, DMR	06/30/04	DMR
C	ADD ROHS, RFS. 14445, EM	08/28/08	HM

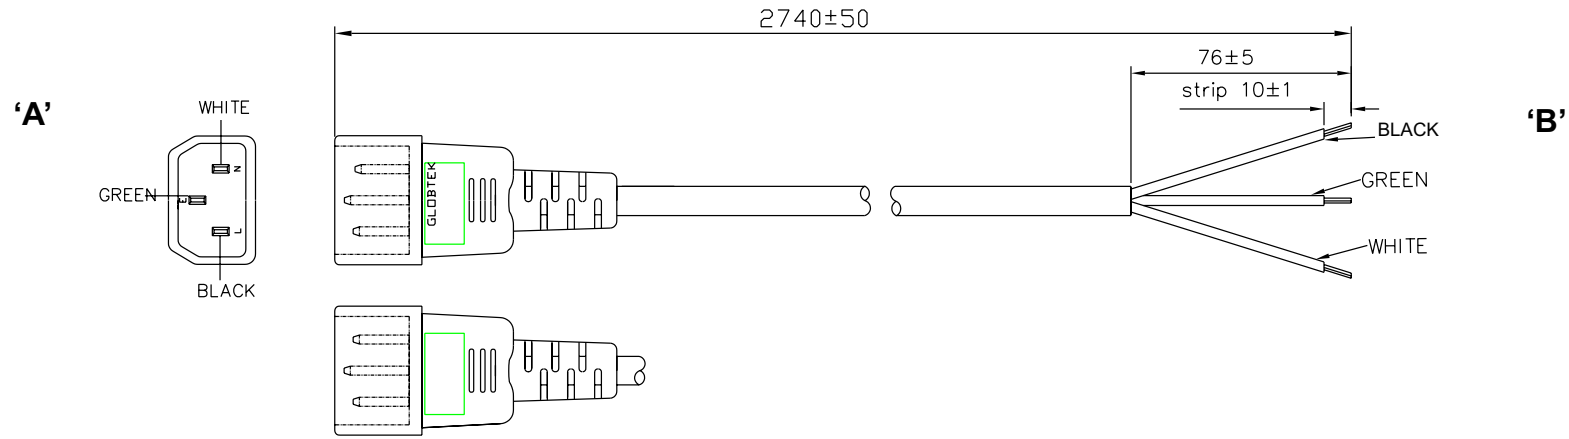

GENERAL SPECIFICATIONS:

RATING: 7A / 250V AC
 CABLE TYPE / SIZE: SVT, # 18 AWG, 3 CONDUCTOR
 TEMPERATURE RATING: 60° C MIN.
 CONDUCTOR COLORS: BLACK / WHITE / GREEN
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2740 ± 50 MM (9 FT)
 CABLE OUTER DIAMETER: 6.8 ± 0.1 MM
 END 'A' PLUG; IEC 320/C14
 END 'B' SEE TERMINATION TABLE
 APPROVALS PLUG: UL, CSA OR CUL
 APPROVALS CABLE: UL, CSA OR CUL

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS.




CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ ± 5 mm	R I J ± 1 mm	Terminal
Ground	Green	76	10	STRIPPED
Neutral	White	76	10	STRIPPED
Line	Black	76	10	STRIPPED

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		 GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 www.globtek.com
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: DMR	DATE: 07/01/04	DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET		
DRAWN: NF	DATE: 07/01/04	FSCN No.: G, CC	SIZE A	MODEL: N / A REV. C
APRVD: DMR	DATE: 07/01/04	SCALE: NONE		PART NO: 7051449F00(R) SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice