



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Shock-Safe Fuseholder, 5 x 20 mm, Fingerrip, NF



250 VAC · 3.4 W / 6.3 A (NF)

GAM
T1 NNO**Description**

- IP 68 from front-side
- Screw type fuse carrier

Standards

- NF C 93-436 - Model HB13
- Contrôle de Conformité de Qualité (CCQ)

References

[General Product Information](#)

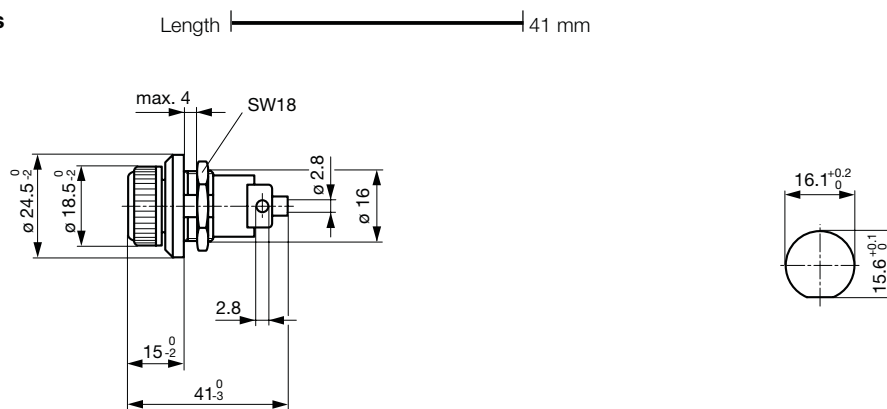
Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

| | |
|------------------------------|--------------------------------------|
| Fuse-Link | 5 x 20 mm |
| Mounting | Panel Mount, Front-Side |
| Fastening | Fixing Nut |
| Terminal | Solder |
| Rated Voltage | 250 VAC |
| Rated Current | 6.3 A (NF) |
| Rated Power Acceptance IEC | 3.4 W / 6.3 A @ Ta 23 °C |
| Degree of Protection | IP 68 |
| Admissible Ambient Air Temp. | -40 °C to 125 °C |
| Climatic Category | 40/125/56 acc. to IEC 60068-1 |
| Material: Socket | Thermoset, black |
| Unit Weight (Socket/Cap) | 25 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking | Type, Voltage Rating, Current Rating |

| | |
|---------------------------------|--|
| Soldering Methods | Iron |
| Resistance to Vibration | acc. to NF C 20-706 / IEC 60068-2-6, test Fc |
| Shocks | acc. to NF C 20-706 / IEC 60068-2-27 |
| Bumps | acc. to NF C 20-729 / IEC 60068-2-29 |
| Salt Mist | acc. to NF C 20-711 / IEC 60068-2-11 |
| Dump Heat | acc. to NF C 20-604 |
| Climatic Composite | acc. to NF C 20-619 Phase D |
| Admissible Torque on Fixing Nut | max 1.0 Nm |
| Panel Thickness s | max 4 mm |

Dimensions

Mounting holes

Variants

| Holder | Cap | Degree of Protection | Order Number |
|--------|-----------|----------------------|--------------|
| ● | Fingerrip | IP 68 | 7091.6110 |

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Packaging Unit Bulk (10 pcs.)