



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Shock-Safe Fuseholder, 6.3 x 32 mm, Fingergrip, Rear-Side, NF



250 VAC · 2.5 W / 10 A (NF) 10 A (UL/CSA)



Description

- Screw type fuse carrier

Standards

- UL 4248-1 / UL 512
- CSA C22.2 no. 39
- NF C 93-436 - Modell HB02
- Contrôle de Conformité de Qualité (CCQ)

Approvals

- UL File Number: E41738
- CSA File Number: 23151

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


Technical Data

| | |
|------------------------------|--|
| Fuse-Link | 6.3 x 32 mm |
| Mounting | Panel Mount, Rear Side |
| Attachment | Fixing Nut |
| Terminal | Solder |
| Rated Voltage | 250 VAC |
| Rated current | 10 A (NF), 10 A (UL/CSA) |
| Rated Power Acceptance IEC | 2.5 W / 10 A @ Ta 23 °C Admissible power acceptance at higher ambient temperature see derating curves |
| Degree of Protection | IP 40 / IP 67 |
| Protection Class | Suitable for appliances with protection class I or II acc. to IEC 61140 |
| Admissible Ambient Air Temp. | -40 °C to 85 °C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Socket | Thermoset, black |
| Unit Weight | 19 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking | Type, Rated Voltage, Rated current, Approvals, HB2 |

| | |
|---------------------------------|--|
| Soldering Methods | Iron Soldering Profile |
| Contact Resistance | < mΩ at 20 mV |
| Resistance to Vibration | acc. to NF C 20-706 / IEC 60068-2-6, test Fc |
| Shocks | acc. to NF C 20-706 / IEC 60068-2-27 |
| Bumps | acc. to NF C 20-729 / IEC 60068-2-29 |
| Salt Mist | acc. to NF C 20-711 / IEC 60068-2-11 |
| Dump Heat | acc. to NF C 20-604 |
| Climatic Composite | acc. to NF C 20-619 Phases D and F |
| Admissible Torque on Fixing Nut | max 1.2 Nm |
| Panel Thickness | max 5 mm |

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension 54 mm

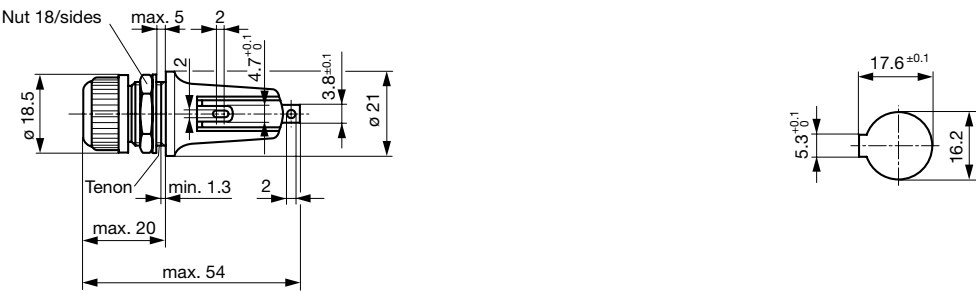

Mounting holes

All Variants

| Holder | Cap | Fuse-Link | Degree of Protection | NF | UL | SP | GAM T1 | NNO | Reference | Order Number |
|--------|------------|------------|----------------------|----|----|----|--------|-----|------------|--------------|
| ● | Fingergrip | 6.3 x 32mm | IP 40 | ● | ● | ● | | | 23312P | 7092.2520 |
| ● | Fingergrip | 6.3 x 32mm | IP 67 | | | | | | 23312ERJJP | 7092.2630 |

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (100 pcs.)