

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## **INTERCONNECTS**

## SERIES 712 • .100" GRID CARRIER WITH SOLDER TAIL • **SINGLE AND DOUBLE ROW STRIPS**

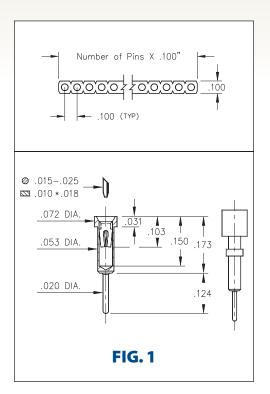

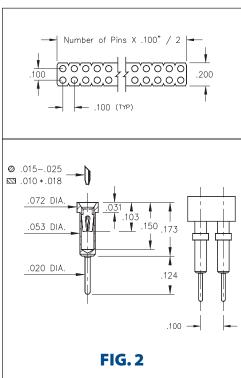

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes
- Series 712 use MM #0255 pins. See page 165 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



## **ORDERING INFORMATION**

	Single	Single Row (.028" or .055" min. mounting holes)							
	3.1191								
FIG. 1		712-XX-141-001000							
	Specif	y numb	er of pir	ns	— 01-e	54			
	Doub	Double Row (.028" or .055" min. mounting holes)							
FIG. 2		712-XX-241-001000							
	Specif	Specify number of pins 04-64							
		_		_					
RoHS-2  XX=Plating Code    Security and Data   Security and Data									
See Below & Environmental Data, See page 264									
SPECIFY PLAT	ING CODE XX=	11 🔷	13 🔷	91	93	41 🔷	43 🔷		
Sleeve (Pin)		10 μ" Au	10 μ" Au	200 μ"Sn/Pb	200 μ"Sn/Pb	200 μ"Sn	200 μ″Sn		
Contact (Clip)	0	10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au		