



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



7000 Series/High Reliability Reed Relays




High Reliability Reed Relays

The 7000 Series is ideally suited to the needs of Instrumentation, Data Acquisition, Process Control, Telecommunications and General Purpose requirements. The specification tables allow you to select the appropriate relay for your particular application. These models are specifically designed for high quality and reliability with versatile switching capabilities and contact forms. If your requirements differ, please consult your local representative or Coto's Factory to discuss a custom reed relay.

7000 Series Features


- ◆ Multi-pole contact forms (Form A, B, and C)
- ◆ Wide range of switching capabilities; Low level, High Voltage, Hg wet
- ◆ Hermetically sealed contacts for long life and high reliability
- ◆ High speed switching compared to electromechanical relays
- ◆ Potted in metal shell - Magnetic Shield
- ◆ Optional Electrostatic Shield for reducing capacitive coupling
- ◆ PCB mounting versatility - 1.0" x 0.100" grid
- ◆ Optional coil suppression diode offered to protect coil drivers

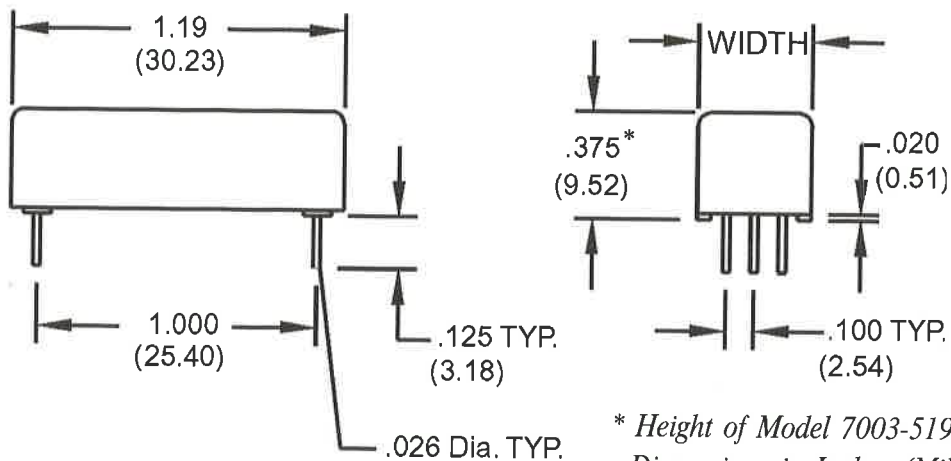

WIDTH	A	B	C	D
DIMENSION	.410 (10.41)	.500 (12.70)	.660 (16.76)	.760 (19.30)

Table #1

Ordering Information

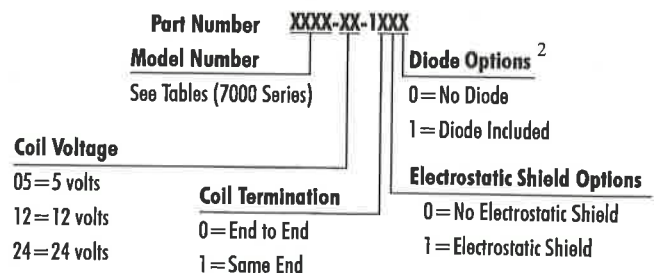

7000 Series/High Reliability Reed Relays

Parameters	Test Conditions	Units	Form A, B, Latch	Form C	Form A ⁴ Hg Wet	Form C ⁴ Hg Wet	Form A High Voltage	Form A Sensor (7003-5193)
CONTACT RATINGS								
Switching Voltage	Max DC/Peak AC Resist.	Volts	200	150	500	500	500	50
Switching Current	Max DC/Peak AC Resist.	Amps	0.5	0.25	1.0	1.0	0.5	0.05
Carry Current	Max DC/Peak AC Resist.	Amps	2.0	0.5	2.0	2.0	2.0	0.5
Contact Rating	Max DC/Peak AC Resist.	Watts	10	3	50	50	10	3
Life Expectancy-Typical ¹	Signal Level 1.0V,10mA	x 10 ⁶ Ops.	1000	100	1000	1000	100	100
Static Contact Resistance (max. init.)	50mV, 10mA	Ω	0.100	0.150	0.075	0.100	0.100	0.200
Dynamic Contact Resistance (max. init.)	0.5V, 50mA at 100 Hz, 1.5 msec	Ω	0.150	0.200	0.100	0.150	0.150	N/A
RELAY SPECIFICATIONS								
Insulation Resistance (minimum)	Between all Isolated Pins at 100V, 25°C, 40% RH	Ω	10 ¹²	10 ¹⁰	10 ¹²	10 ¹²	10 ¹²	10 ¹⁰
Capacitance - Typical	No Shield	pF	1.0	2.0	1.0	2.0	1.0	1.0
Across Open Contacts	Shield Guarding	pF	0.2	1.0	0.2	1.0	0.2	0.2
Dielectric Strength (minimum)	Between Contacts	VDC/peak AC	250	200	1000	1000	1200	200
	Contacts to Shield	VDC/peak AC	1000	1000	1000	1000	1000	N/A
	Contacts/Shield to Coil	VDC/peak AC	1500	1500	1500	1500	1500	2850
Operate Time - including bounce - Typical	At Nominal Coil Voltage, 30 Hz Square Wave	msec.	1.0	2.0	2.0	2.0	1.0	0.35
Release Time - Typical	Zener-Diode Suppression ¹	msec.	0.1	2.5	1.0	1.5	0.1	0.25

Dot stamped on top of relay refers to pin #1 location

(See following pages for schematic diagrams and coil data.)

Notes:

- ¹ Consult factory for life expectancy at other switching loads.
- ² Optional coil suppression diode is available for all models.
- ³ Consists of 20V Zener-diode and 1N4002 diode in series, connected in parallel with coil
- ⁴ 7200 series mercury content, approximately .06 grams per individual contact

Environmental Ratings:

Storage Temp: -35°C to +100°C;
 Operating Temp: -20°C to +85°C
 Solder Temp: 270°C max; 10 sec. max
 The operate and release voltage and the coil resistance are specified at 25°C. These values vary by approximately 0.4%/°C as the ambient temperature varies.
 Vibration: 20 G's to 2000 Hz; Shock: 50 G's

Contact Form	Model Number	Nominal Coil Voltage VDC	Must Operate Voltage VDC max.	Must Release Voltage VDC min.	Coil Resistance $\pm 10\%$ @25°C	Width (See Table #1)	Schematic Top View ⁸	
							End to End Coil	Same End Coil
1A	7101	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	300 1600 4200	A		
2A	7102	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	150 1000 3500	B		
3A	7103	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	100 800 2400	C		
4A	7104	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	80 550 2000	D		
1B ¹	7121	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	150 1000 3500	B		
2B ¹	7122	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	100 800 2400	C		
1C	7141	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	175 1100 4200	A		
2C	7142	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	65 490 1550	C		
3C	7143	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	55 300 1350	D		
1A Latch ^{5,6}	7150	5 12	3.75 9.0	0.4 1.0	550/550 1750/1750	B		
1A1B ^{5,7}	7160	5 12 24	3.75 9.0 18.0	0.4 1.0 2.0	80 550 2000	D		

Contact Form	Model Number	Nominal Coil Voltage VDC	Must Operate Voltage VDC max.	Must Release Voltage VDC min.	Coil Resistance $\pm 10\%$ @25°C	Width (See Table #1)	Schematic Top View ⁸	
							End to End Coil	Same End Coil
1A Hg wet ⁹	7201	5	3.75	0.4	70	A		
		12	9.0	1.0	450			
		24	18.0	2.0	1785			
2A Hg wet ⁹	7202	5	3.75	0.4	60	B		
		12	9.0	1.0	340			
		24	18.0	2.0	1330			
3A Hg wet ⁹	7203	5	3.75	0.4	50	C		
		12	9.0	1.0	300			
		24	18.0	2.0	1200			
4A Hg wet ⁹	7204	5	3.75	0.4	40	D		
		12	9.0	1.0	250			
		24	18.0	2.0	960			
1C Hg wet ⁹	7241	5	3.75	0.4	50	C		
12	9.0	1.0	300					
24	18.0	2.0	1200					
1A High Voltage ⁷³⁰¹	7301	5	3.75	0.4	175	A		
		12	9.0	1.0	1100			
		24	18.0	2.0	4200			
2A High Voltage ⁷³⁰²	7302	5	3.75	0.4	100	B		
		12	9.0	1.0	640			
		24	18.0	2.0	2450			
3A High Voltage ⁷³⁰³	7303	5	3.75	0.4	65	C		
		12	9.0	1.0	490			
		24	18.0	2.0	1550			
4A High Voltage ⁷³⁰⁴	7304	5	3.75	0.4	55	D		
		12	9.0	1.0	300			
		24	18.0	2.0	1350			
1A Current Sensor	7003-5193 ¹⁰	N/A	13.0 (mA Max)	5.0 (mA Min)	8	C		

Notes:

- ⁵ These relays contain bias magnets. Correct coil polarity must be observed.
- ⁶ Coil suppression diode is required for proper operation. Correct coil polarity must be observed.
- ⁷ Break before make not guaranteed.
- ⁸ Dot stamped on top of relay refers to pin #1 location. E-pin indicates Electrostatic shield pin. Unused pins omitted. Pin numbers for reference only.
- ⁹ All models with Hg wet contacts are position sensitive, must be mounted within 30° of vertical plane. See schematic.
- ¹⁰ Model #7003-5193 represents a complete part number.