



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




ZEICHNUNG GESCHÜTZT DURCH
 © COPYRIGHT 1986
 AMP DEUTSCHLAND GMBH
 ALLE RECHTE VORBEHALTEN

ÄNDERUNGEN, DIE DEM
 TECHNISCHEN FORT-
 SCHRITT DIENEN, BE-
 HALTEN WIR UNS VOR

REV.	ÄNDERUNG	DATUM	NAME
1	MASS 8 war 7,9; 2tes Loch hinzu	28.07.92	W. Hoffmann

NUMMER
 VERWENDET FÜR
 WAR NR.

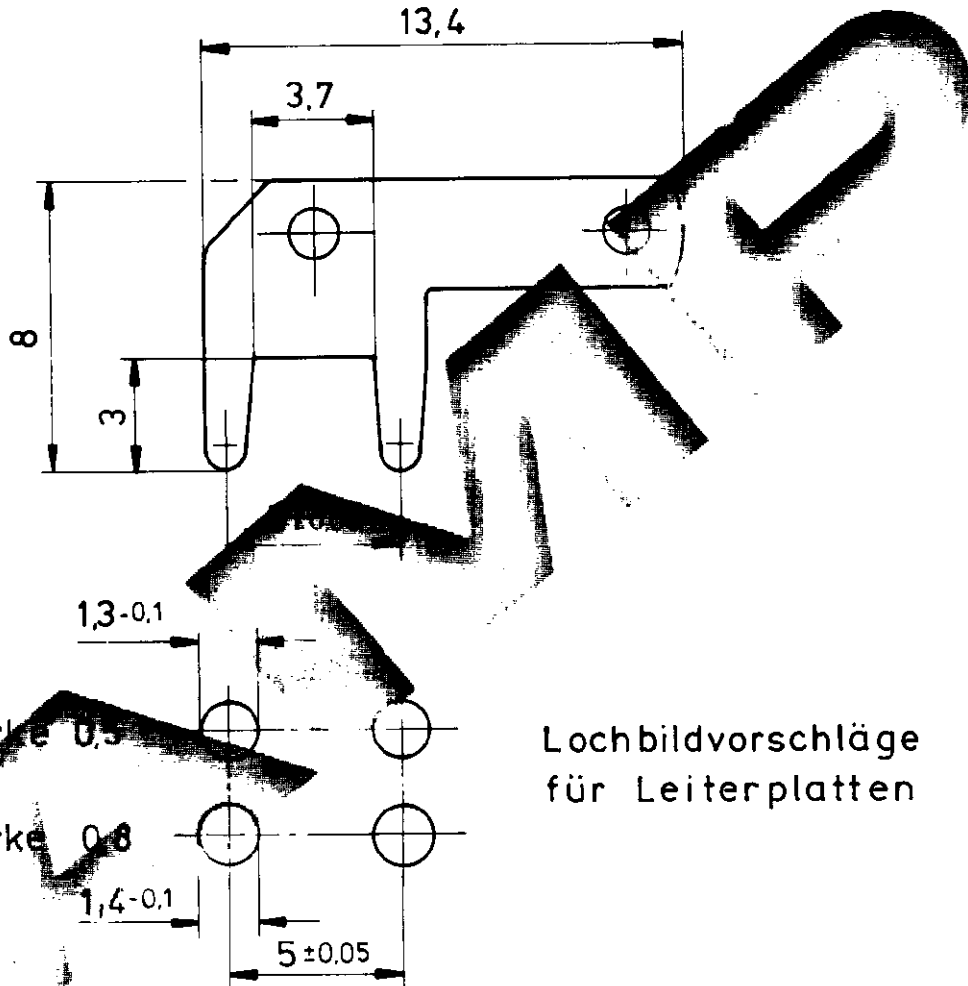

Lochbildvorschläge
 für Leiterplatten

Materialstärke 0,5
 Materialstärke 0,8

1-725 996-4	Messing / vergoldet	0,8
1-725 996-3	Messing / versilbert	
1-725 996-2	Messing / verzinkt	
1-725 996-1	Messing / blank	
725 996-4	Messing / vergoldet	0,5
725 996-3	Messing / versilbert	
725 996-2	Messing / verzinkt	
725 996-1	Messing / blank	
BESTELL-NR.	WERKSTOFF	Materialstärke

ZEICHNUNG GÜLTIG AB

AMP

AMP DEUTSCHLAND GmbH
 Langen b. Ffm., West Germany

BENENNUNG

PCB-TAB 90° 2,8x0,5; 2,8x0,8

K

GEZ. 22.04.86
 GEPR. GEPR.

NICHT TOLERIERTE MASSE ± 0.2 MM	FORMAT A4	ZEICHNUNGS-NR. 725 996
MASS-STAB 5 : 1	BLATT 1 VON 1	REV. 1