



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Models 72923

SMD Test Probe W/ Sharp, Spring Mounted Tip, 2MM



Features

- SMD test probe with sharp, spring mounted tip and 2mm jack
- Provides ultra-fine control for probing high density SMD circuits
- Very fine 0.03in (0.7mm) diameter stainless steel tip is spring-mounted for controlled pressure
- Removable, clear IC insulator cap prevents shorting of adjacent IC loges.
- Sheathed 2mm receptacle adapts to 2mm test leads and adapters.

Materials

- Probe Body: Brass
- Probe Tip: Steel
- Insulation: Polypropylene
- Cap Insulation: Polypropylene

Ordering Information


Model:72923-Color
Available colors: Black (-0), or Red (-2)

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

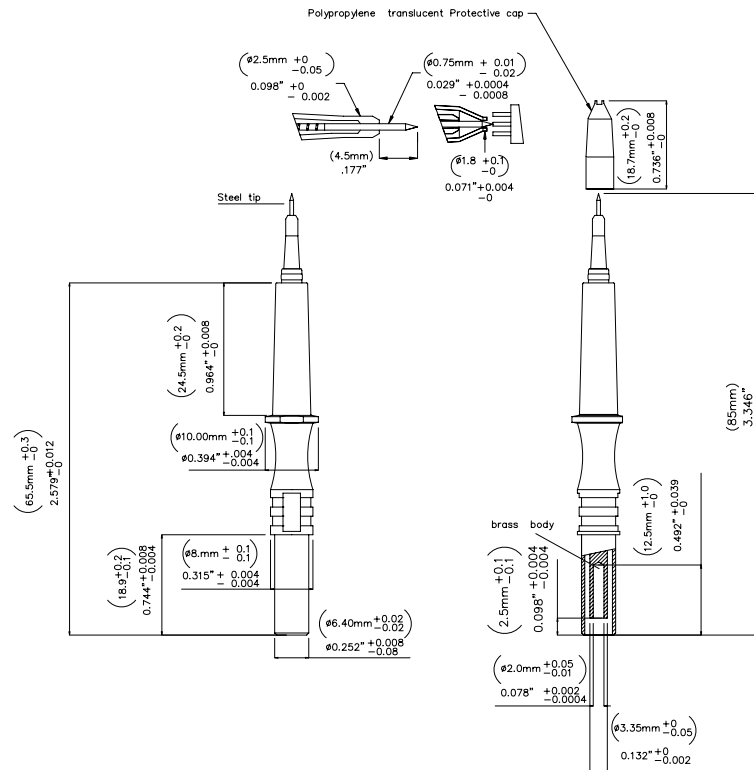

Specifications

Max Current	Max. 1A
Max Voltage	600 V Cat III
Temperature	-20° C + 80° C
Max Resistance	Less than 5 mΩ

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.