mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Model 72925 Do-It-Yourself 2mm Stackable Safety Sheathed Plug

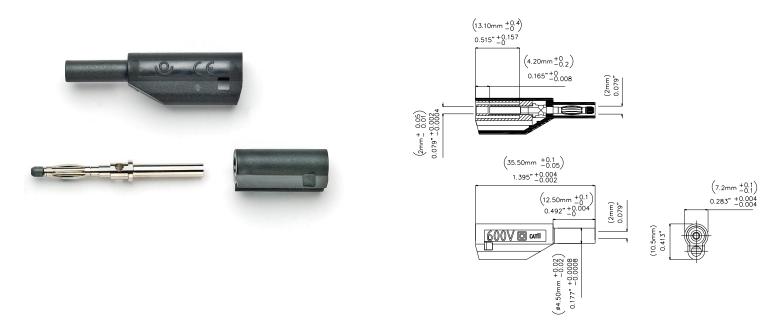

Features

- Build your own 2mm stackable test leads
- Plug spring is Beryllium Copper for long insertion life
- Safety rating CAT II 600V when plug is correctly assembled and terminated.

Materials

Plastic body:PolypropylenePlug body:Brass, Nickel PlatedSpring:Beryllium Copper, Nickel PlatedSpring Tip:Polysulfone

Specifications

Current	Max. 10A
Voltage	600 V CAT II
Max Resistance	Less than 5 m Ω

Ordering Information

Model **72925-**Color Colors: **-0** (black) and **-2** (red)

USA: Sales: 800-490-2361 Technical Support: <u>technicalsupport@pomonatest.com</u> Fax: 425-446-5844 Europe: 31-(0) 40 2675 150 International: 425-446-5500 Where to Buy: <u>www.pomonaelectronics.com</u> All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.