

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Pomona B L E C T R O N I C S

Model 72931 – SMA Adapter Kit

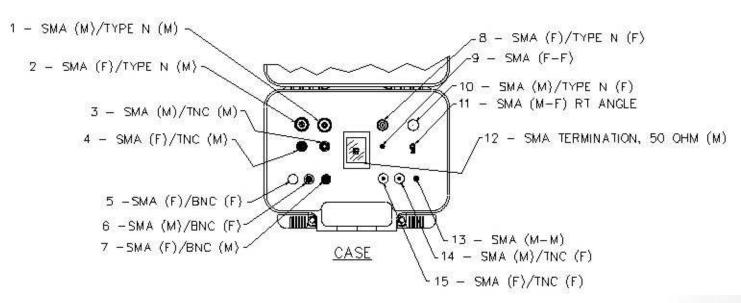

Features:

- All 15 adapters in kit are direct. No intermediate couplers.
- Reduced signal loss in adapters due to absence of couplers.
- Kit includes the most frequently used SMA adapters including SMA / SMA, SMA / BNC, SMA / N, SMA / TNC. See complete list in drawing or table below.
- Rugged, lockable, pistol-grip case.
- All parts precision machined brass with tarnish resistant gold or nickel plating.
- Male center pins are gold plated brass.
- Female contacts are gold plated heat treated beryllium copper.
- Insulation material is high density PTFE.



Order Example: 72931 (SMA Adapter Kit)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technical support@pomonatest.com) For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100



Model 72931 – SMA Adapter Kit

RATINGS:

See Rating Information for each specific adapter in table below.

Item	Description	Part Number	NOM. IMPEDANCE	FREQ. RANGE	VSWR	OPERATING TEMP
	SMA	rtainiboi	IIII EBAROL	HAROL	701111	1 21111
1	male/TYPE N					
	male	4296	50 Ohms	0 to 12.4GHz	1.35 to 11GHz	- 65° to +165° C
2	SMA female					
	TYPE N male	4283	50 Ohms	0 to 11 GHz	1.35 to 11GHz	- 65° to +165° C
3	SMA					
	male/TNC	4000	50 Ob	0 += 10 1 011=	1.05 +- 11.01 -	05°+- 405° 0
	male SMA female/	4292	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
4	TNC male	4293	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
	SMA	4230	30 Omms	0 10 12.4 0112	1.00 to 110112	- 03 10 +103 0
5	female/BNC					
	female	4291	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
6	SMA male/					
	BNC female	4290	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
7	SMA female/					
	BNC male	4289	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
8	SMA female/TYPE					
	N female	4299	50 Ohms	0 to 11 GHz	1.35 to 11GHz	- 65° to +165° C
_	SMA	4233	30 Omms	0 10 11 0112	1.00 to 110112	- 03 10 +103 0
9	female/female	4284	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
10	SMA male/					
	TYPE N					
	female	4298	50 Ohms	0 to 11 GHz	1.35 to 11GHz	- 65° to +165° C
11	SMA	4000	OI		4.05 . 44.044	
	male/female	4282	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
12	SMA male TERM 50				1.25 Max at 18	
	Ohm	4286	50 Ohms	DC to 18 GHz	GHz	- 65° to +165° C
13	SMA	7200	CO OTITIO	2010104112	GIIZ	00 10 +100 0
	male/male	4283	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
14	SMA					
	male/TNC					
	female	4294	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C
15	SMA					
	female/TNC	4005	50 Ob	01-40404	4.05 1. 44.011	05° 1. 405° 0
	female	4295	50 Ohms	0 to 12.4 GHz	1.35 to 11GHz	- 65° to +165° C

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technical support@pomonatest.com) For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100