



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



74ALVCH16374

LOW VOLTAGE CMOS 16-BIT D-TYPE FLIP-FLOP (3-STATE) WITH 3.6V TOLERANT INPUTS AND OUTPUTS

- 3.6V TOLERANT INPUTS AND OUTPUTS
- HIGH SPEED :
 $t_{PD} = 4.2$ ns (MAX.) at $V_{CC} = 3.0$ to 3.6V
 $t_{PD} = 5.3$ ns (MAX.) at $V_{CC} = 2.3$ to 2.7V
 $t_{PD} = 6.5$ ns (MAX.) at $V_{CC} = 1.65$ V
- POWER DOWN PROTECTION ON INPUTS AND OUTPUTS
- SYMMETRICAL OUTPUT IMPEDANCE:
 $|I_{OH}| = I_{OL} = 24$ mA (MIN) at $V_{CC} = 3.0$ V
 $|I_{OH}| = I_{OL} = 18$ mA (MIN) at $V_{CC} = 2.3$ V
 $|I_{OH}| = I_{OL} = 4$ mA (MIN) at $V_{CC} = 1.65$ V
- OPERATING VOLTAGE RANGE:
 $V_{CC(OPR)} = 1.65$ V to 3.6V
- PIN AND FUNCTION COMPATIBLE WITH 74 SERIES 16374
- BUS HOLD PROVIDED ON DATA INPUTS
- LATCH-UP PERFORMANCE EXCEEDS 300mA (JESD 17)
- ESD PERFORMANCE:
HBM > 2000V (MIL STD 883 method 3015); MM > 200V

DESCRIPTION

The 74ALVCH16374 is a low voltage CMOS 16 BIT D-TYPE FLIP-FLOP with 3 STATE OUTPUTS NON INVERTING fabricated with sub-micron silicon gate and five-layer metal wiring C²MOS technology. It is ideal for low power and very high speed 1.65 to 3.6V applications; it can be interfaced to 3.6V signal environment for both inputs and outputs.

These 16 bit D-TYPE flip-flops are controlled by two clock inputs (nCK) and two output enable inputs (nOE).

On the positive transition of the (nCK), the nQ outputs will be set to the logic state that were set-up at the nD inputs.

While the (nOE) input is low, the outputs (nQ) will be in a normal state (HIGH or LOW logic level) and while high level the outputs will be in a high impedance state. Any output control does not affect the internal operation of flip flops; that is, the old data can be retained or the new data can be entered even while the outputs are off.

All inputs and outputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.


February 2003




ORDER CODES

PACKAGE	TUBE	T & R
TSSOP		74ALVCH16374TTR

PIN CONNECTION

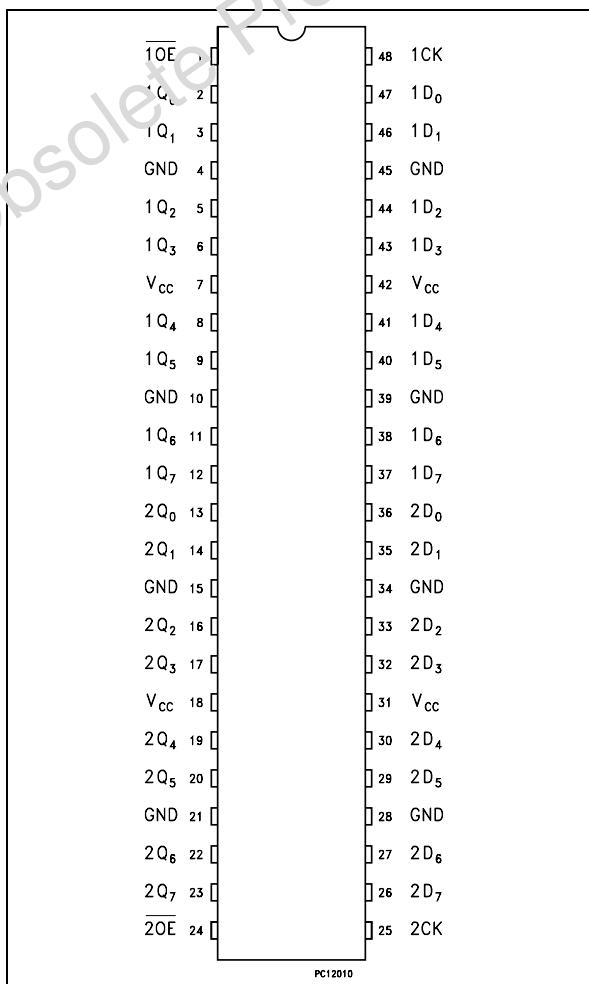


INPUT AND OUTPUT EQUIVALENT CIRCUIT

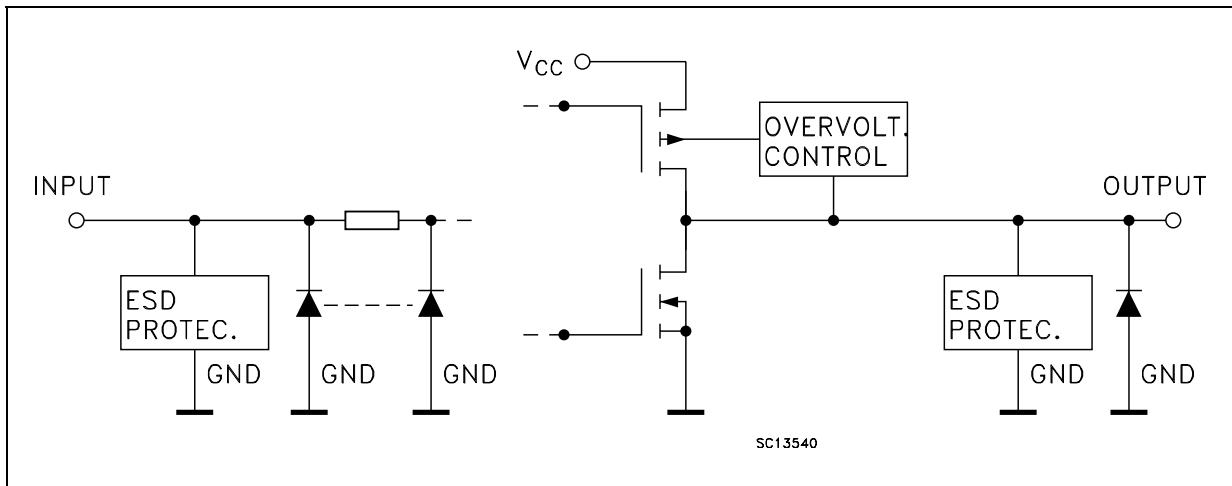

PIN DESCRIPTION

PIN No	SYMBOL	NAME AND FUNCTION
1	1OE	3 State Output Enable Input (Active LOW)
2, 3, 5, 6, 8, 9, 11, 12	1Q0 to 1Q7	3-State Outputs
13, 14, 16, 17, 19, 20, 22, 23	2Q0 to 2Q7	3-State Outputs
24	2OE	3 State Output Enable Input (Active LOW)
25	2CK	Clock Input
36, 35, 33, 32, 30, 29, 27, 26	2D0 to 2D7	Data Inputs
47, 46, 44, 43, 41, 40, 38, 37	1D0 to 1D7	Data Inputs
48	1CK	Clock Input
4, 10, 15, 21, 28, 34, 39, 45	GND	Ground (0V)
7, 18, 31, 42	V _{CC}	Positive Supply Voltage

IEC LOGIC SYMBOLS

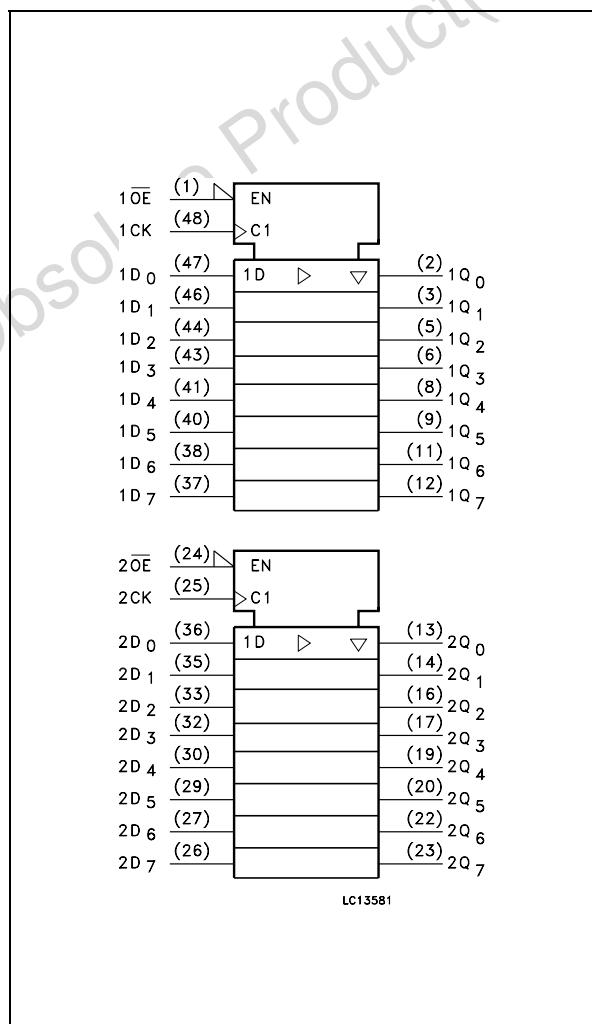


TRUTH TABLE

INPUTS			OUTPUT
OE	CK	D	Q
H	X	X	Z
L	⊓	X	NO CHANGE
L	⊒	L	L
L	⊒	H	H

X : Don't Care

Z : High Impedance

LOGIC DIAGRAM

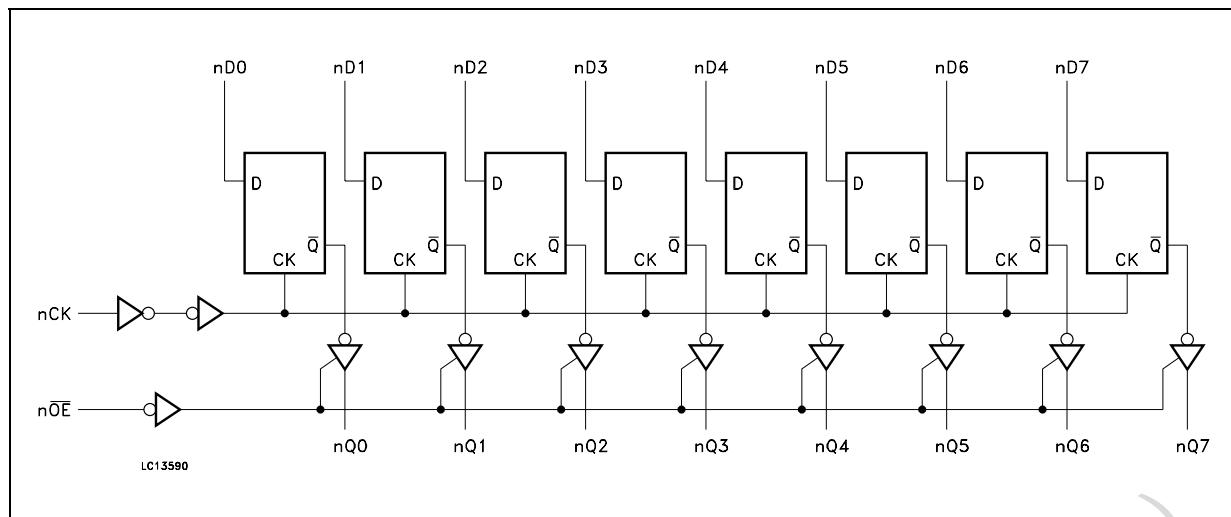

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	-0.5 to +4.6	V
V_I	DC Input Voltage	-0.5 to +4.6	V
V_O	DC Output Voltage (OFF State)	-0.5 to +4.6	V
V_O	DC Output Voltage (High or Low State) (note 1)	-0.5 to $V_{CC} + 0.5$	V
I_{IK}	DC Input Diode Current	-50	mA
I_{OK}	DC Output Diode Current (note 2)	-50	mA
I_O	DC Output Current	± 50	mA
I_{CC} or I_{GND}	DC V_{CC} or Ground Current per Supply Pin	± 100	mA
P_D	Power Dissipation	400	mW
T_{stg}	Storage Temperature	-65 to +150	°C
T_L	Lead Temperature (10 sec)	300	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied

1) I_O absolute maximum rating must be observed

2) $V_O < GND$, $V_O > V_{CC}$

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	1.65 to 3.6	V
V_I	Input Voltage	-0.3 to 3.6	V
V_O	Output Voltage (OFF State)	0 to 3.6	V
V_O	Output Voltage (High or Low State)	0 to V_{CC}	V
I_{OH}, I_{OL}	High or Low Level Output Current ($V_{CC} = 3.0$ to 3.6V)	± 24	mA
I_{OH}, I_{OL}	High or Low Level Output Current ($V_{CC} = 2.3$ to 2.7V)	± 12	mA
I_{OH}, I_{OL}	High or Low Level Output Current ($V_{CC} = 1.65$ V)	± 4	mA
T_{op}	Operating Temperature	-55 to 125	°C
dt/dv	Input Rise and Fall Time (note 1)	0 to 10	ns/V

1) V_{IN} from 0.8V to 2V at $V_{CC} = 3.0$ V

DC SPECIFICATIONS

Symbol	Parameter	Test Condition		Value				Unit	
		V_{CC} (V)		-40 to 85 °C		-55 to 125 °C			
				Min.	Max.	Min.	Max.		
V_{IH}	High Level Input Voltage	1.65 to 1.95		0.65 Vcc		0.65 Vcc		V	
		2.3 to 2.7		1.7		1.7			
		2.7 to 3.6		2.0		2.0			
V_{IL}	Low Level Input Voltage	1.65 to 1.95		0.35 Vcc		0.35 Vcc		V	
		2.3 to 2.7		0.7		0.7			
		2.7 to 3.6		0.8		0.8			
V_{OH}	High Level Output Voltage	1.65 to 3.6	$I_O = -100 \mu A$	$V_{CC} - 0.2$		$V_{CC} - 0.2$		V	
		1.65	$I_O = -4 mA$	1.2		1.2			
		2.3	$I_O = -6 mA$	2.0		2.0			
		2.3	$I_O = -12 mA$	1.7		1.7			
		2.7	$I_O = -12 mA$	2.2		2.2			
		3.0	$I_O = -12 mA$	2.4		2.4			
		3.0	$I_O = -24 mA$	2.0		2.0			
V_{OL}	Low Level Output Voltage	1.65 to 3.6	$I_O = 100 \mu A$		0.2		0.2	V	
		1.65	$I_O = 4 mA$		0.45		0.45		
		2.3	$I_O = 6 mA$		0.4		0.4		
		2.3	$I_O = 12 mA$		0.7		0.7		
		2.7	$I_O = 12 mA$		0.4		0.4		
		3.0	$I_O = 24 mA$		0.55		0.55		
I_I	Input Leakage Current	3.6	$V_I = 0$ or $3.6V$		± 5		± 5	μA	
I_{IHOLD}	Bus Hold Input Leakage Current	1.65	$V_I = 0.58 V$	+ 25		+ 25		μA	
		1.65	$V_I = 1.07 V$	- 25		- 25			
		2.3	$V_I = 0.7 V$	+ 45		+ 45			
		2.3	$V_I = 1.7 V$	- 45		- 45			
		3.0	$V_I = 0.8 V$	+ 75		+ 75			
		3.0	$V_I = 2 V$	- 75		- 75			
		3.6	$V_I = 0$ to $3.6V$		± 500		± 500		
I_{off}	Power Off Leakage Current	0	V_I or $V_O = 3.6V$		10		20	μA	
I_{OZ}	High Impedance Output Leakage Current	3.6	$V_I = V_{IH}$ or V_{IL} $V_O = 0$ to V_{CC}		± 5		± 10	μA	
I_{CC}	Quiescent Supply Current	3.6	$V_I = V_{CC}$ or GND $I_O = 0$		20		40	μA	
ΔI_{CC}	I_{CC} incr. per Input	3.0 to 3.6	$V_{IH} = V_{CC} - 0.6V$		500		750	μA	

AC ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Test Condition				Value				Unit	
		V_{CC} (V)	C_L (pF)	R_L (Ω)	$t_s = t_r$ (ns)	-40 to 85 °C		-55 to 125 °C			
						Min.	Max.	Min.	Max.		
$t_{PLH} t_{PHL}$	Propagation Delay Time CK to Qn	1.65 to 1.95	30	1000	2.0	1	6.5	1	6.5	ns	
		2.3 to 2.7	30	500	2.0	1	5.3	1	5.3		
		2.7	50	500	2.5	1	4.9	1	4.9		
		3.0 to 3.6	50	500	2.5	1	4.2	1	4.2		
$t_{PZL} t_{PZH}$	Output Enable Time	1.65 to 1.95	30	1000	2.0	1	7.5	1	7.5	ns	
		2.3 to 2.7	30	500	2.0	1	6.2	1	6.2		
		2.7	50	500	2.5	1	5.9	1	5.9		
		3.0 to 3.6	50	500	2.5	1	4.8	1	4.8		
$t_{PLZ} t_{PHZ}$	Output Disable Time	1.65 to 1.95	30	1000	2.0	1	6.5	1	6.5	ns	
		2.3 to 2.7	30	500	2.0	1	5.3	1	5.3		
		2.7	50	500	2.5	1	4.7	1	4.7		
		3.0 to 3.6	50	500	2.5	1	4.3	1	4.3		
t_s	Setup Time, HIGH or LOW level Dn to CK	1.65 to 1.95	30	1000	2.0	1		1		ns	
		2.3 to 2.7	30	500	2.0	1		1			
		2.7	50	500	2.5	1		1			
		3.0 to 3.6	50	500	2.5	1		1			
t_h	Hold Time High or LOW level Dn to CK	1.65 to 1.95	30	1000	2.0	1.5		1.5		ns	
		2.3 to 2.7	30	500	2.0	1.5		1.5			
		2.7	50	500	2.5	1.5		1.5			
		3.0 to 3.6	50	500	2.5	1.5		1.5			
t_w	CK Pulse Width, HIGH	1.65 to 1.95	30	1000	2.0	4		4		ns	
		2.3 to 2.7	30	500	2.0	3.3		3.3			
		2.7	50	500	2.5	3.3		3.3			
		3.0 to 3.6	50	500	2.5	3.3		3.3			
f_{MAX}	Maximum Clock Pulse Frequency	1.65 to 1.95	30	1000	2.0	120		120		MHz	
		2.3 to 2.7	30	500	2.0	150		150			
		2.7	50	500	2.5	200		200			
		3.0 to 3.6	50	500	2.5	300		300			

CAPACITIVE CHARACTERISTICS

Symbol	Parameter	Test Condition		Value			Unit	
		V _{CC} (V)		T _A = 25 °C				
				Min.	Typ.	Max.		
C _{IN}	Input Capacitance Control Inputs	3.3	V _{IN} = V _{CC} or GND		3		pF	
C _{IN}	Input Capacitance Data Inputs	3.3	V _{IN} = V _{CC} or GND		6		pF	
C _{OUT}	Output Capacitance	3.3	V _{IN} = 0 to V _{CC}		7		pF	
C _{PD}	Power Dissipation Capacitance Output enabled (note 1)	3.3	f _{IN} = 10MHz C _L =50pF V _{IN} = 0 or V _{CC}		19		pF	
		2.5			16			
C _{PD}	Power Dissipation Capacitance Output disabled (note 1)	3.3			5			
		2.5			4			

1) C_{PD} is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation. I_{CC(opr)} = C_{PD} × V_{CC} × f_{IN} + I_{CC}/16 (per circuit)

TEST CIRCUIT

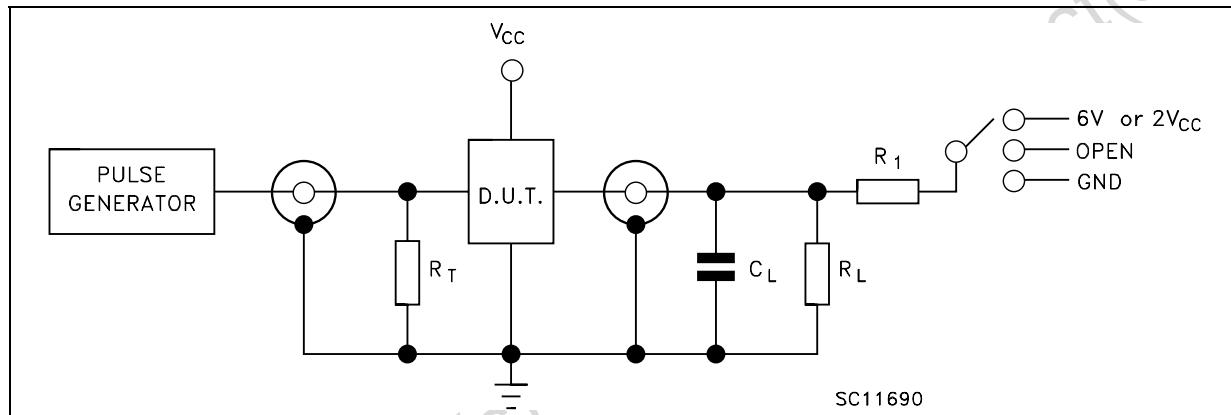


TEST	SWITCH
t _{PLH} , t _{PHL}	Open
t _{PZL} , t _{PLZ} (V _{CC} = 3.0 to 3.6V)	6V
t _{PZL} , t _{PLZ} (V _{CC} = 2.3 to 2.7V)	2V _{CC}
t _{PZH} , t _{PHZ}	GND

R_T = Z_{OUT} of pulse generator (typically 50Ω)


TEST CIRCUIT AND WAVEFORM SYMBOL VALUE

Symbol	V _{CC}			
	3.0 to 3.6V	2.7V	2.3 to 2.7V	1.65 to 1.95V
V _{IH}	2.7V	2.7V	V _{CC}	V _{CC}
V _M	1.5V	1.5V	V _{CC} /2	V _{CC} /2
V _X	V _{OL} + 0.3V	V _{OL} + 0.3V	V _{OL} + 0.15V	V _{OL} + 0.15V
V _Y	V _{OH} - 0.3V	V _{OH} - 0.3V	V _{OH} - 0.15V	V _{OH} - 0.15V
C _L	50pF	50pF	30pF	30pF
R _L =R ₁	500Ω	500Ω	500Ω	1000Ω
t _r = t _f	<2.5ns	<2.5ns	<2.0ns	<2.0ns


WAVEFORM 1 : PROPAGATION DELAYS, CK MINIMUM PULSE WIDTH, D_n TO CK SETUP AND HOLD TIMES, CK MAXIMUM FREQUENCY (f=1MHz; 50% duty cycle)

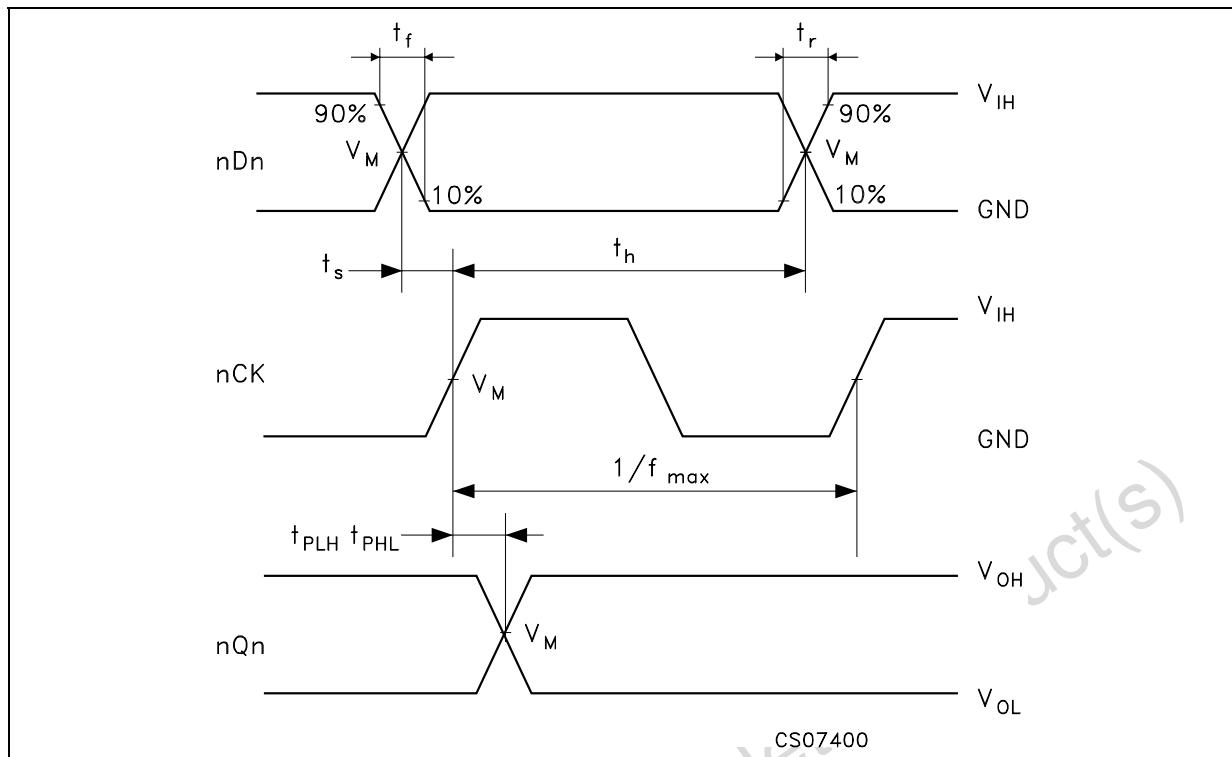

WAVEFORM 2: OUTPUT ENABLE AND DISABLE TIME (f=1MHz; 50% duty cycle)

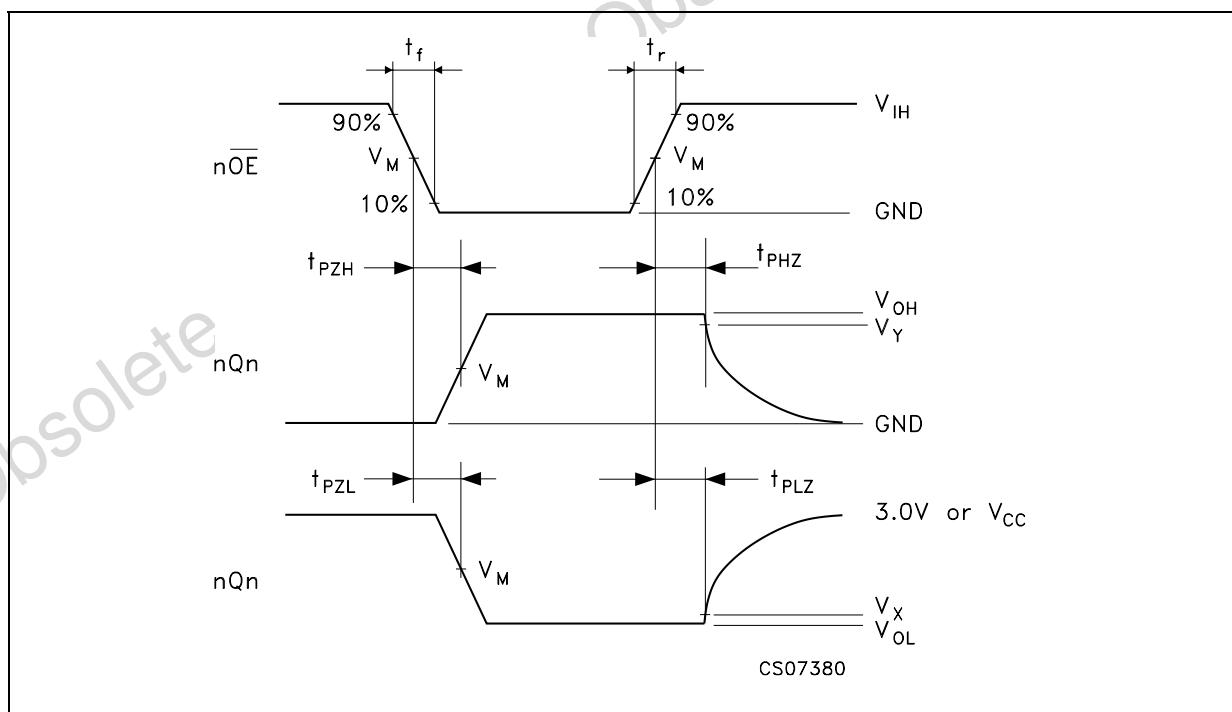


WAVEFORM 3 : CK MINIMUM PULSE WIDTH (f=1MHz; 50% duty cycle)

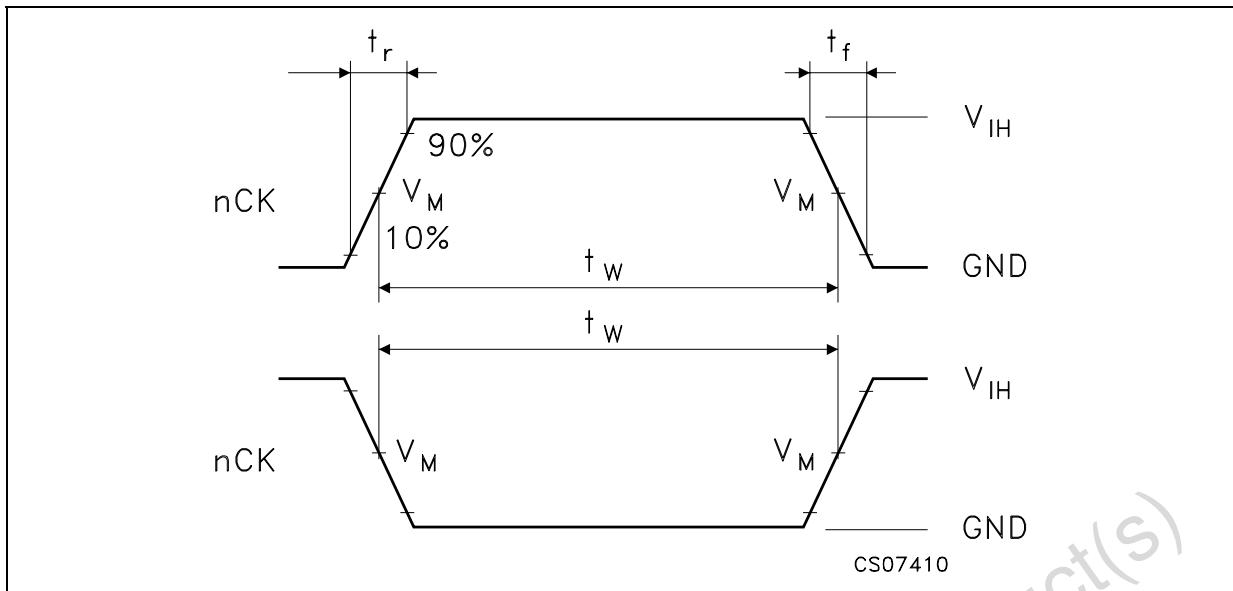


TSSOP48 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			1.2			0.047
A1	0.05		0.15	0.002		0.006
A2		0.9			0.035	
b	0.17		0.27	0.0067		0.011
c	0.09		0.20	0.0035		0.0079
D	12.4		12.6	0.488		0.496
E		8.1 BSC			0.318 BSC	
E1	6.0		6.2	0.236		0.244
e		0.5 BSC			0.0197 BSC	
K	0°		8°	0°		8°
L	0.50		0.75	0.020		0.030

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			1.2			0.047
A1	0.05		0.15	0.002		0.006
A2		0.9			0.035	
b	0.17		0.27	0.0067		0.011
c	0.09		0.20	0.0035		0.0079
D	12.4		12.6	0.488		0.496
E		8.1 BSC			0.318 BSC	
E1	6.0		6.2	0.236		0.244
e		0.5 BSC			0.0197 BSC	
K	0°		8°	0°		8°
L	0.50		0.75	0.020		0.030

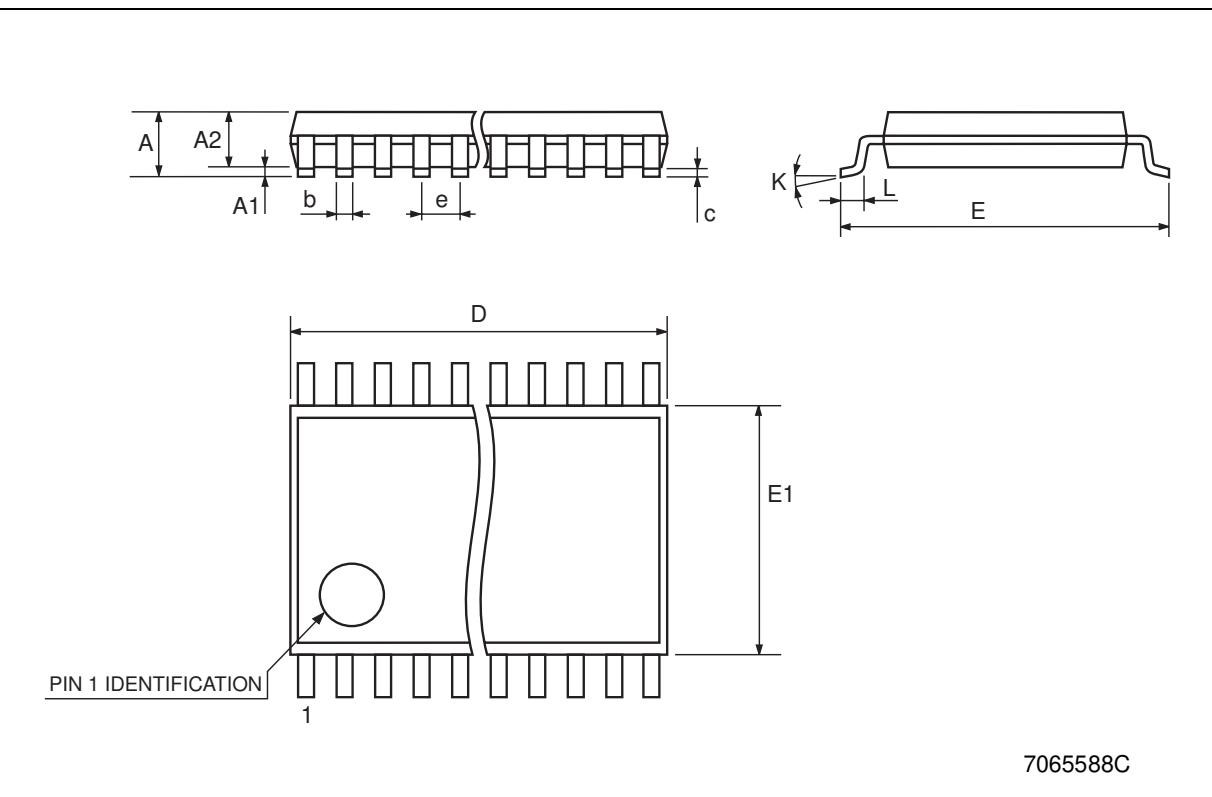

7065588C

Tape & Reel TSSOP48 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			30.4			1.197
Ao	8.7		8.9	0.343		0.350
Bo	13.1		13.3	0.516		0.524
Ko	1.5		1.7	0.059		0.067
Po	3.9		4.1	0.153		0.161
P	11.9		12.1	0.468		0.476

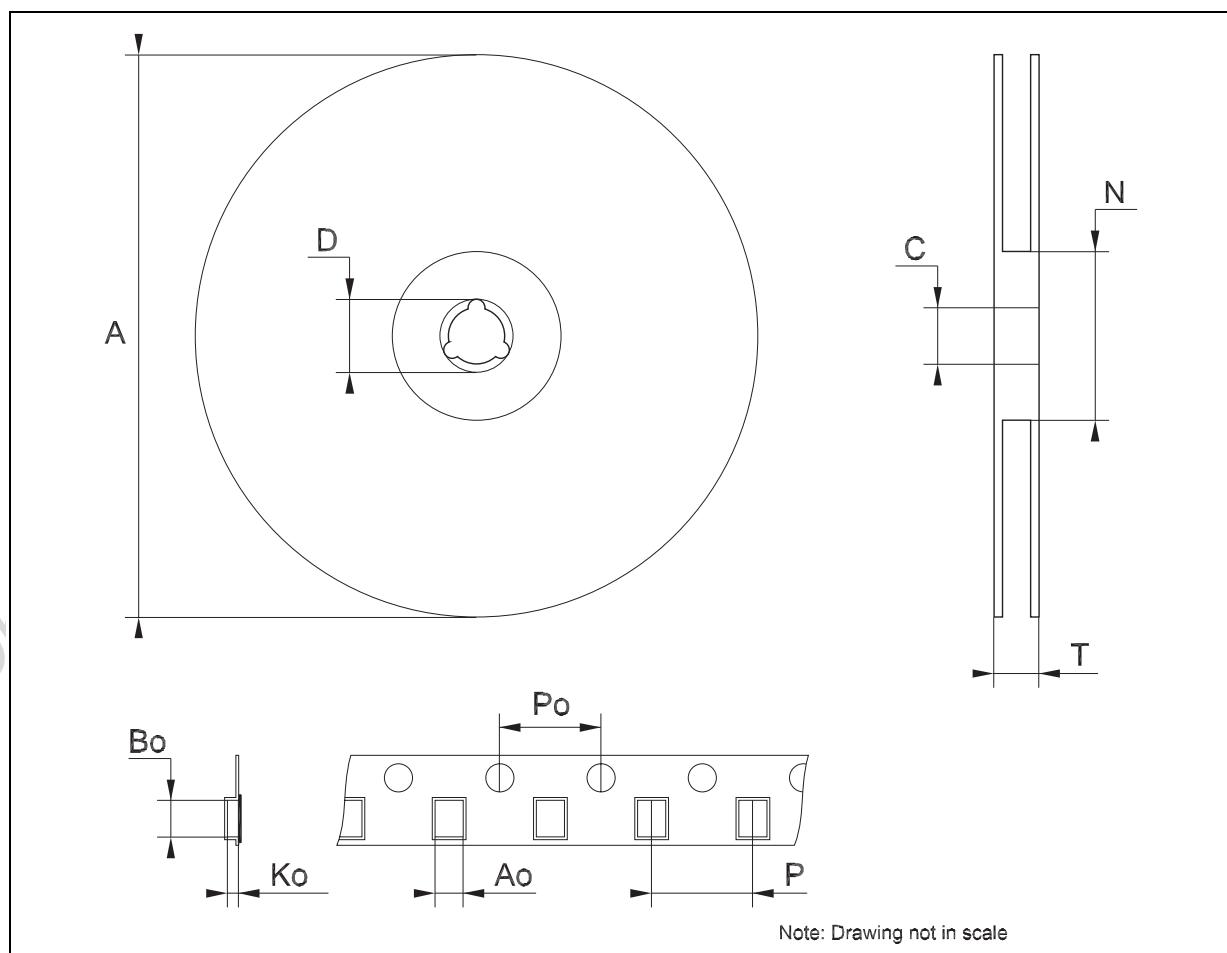



Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>

