



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



74F194 4-Bit Bidirectional Universal Shift Register

General Description

The 74F194 is a high-speed 4-bit bidirectional universal shift register. As a high-speed, multifunctional, sequential building block, it is useful in a wide variety of applications. It may be used in serial-serial, shift left, shift right, serial-parallel, parallel-serial, and parallel-parallel data register transfers.

Features


- Typical shift frequency of 150 MHz
- Asynchronous master reset
- Hold (do nothing) mode
- Fully synchronous serial or parallel data transfers

Ordering Code:


| Order Number | Package Number | Package Description |
|--------------|----------------|--|
| 74F194SC | M16A | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| 74F194PC | N16E | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Symbols

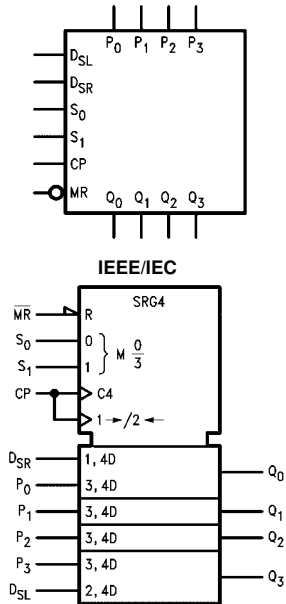

Connection Diagram



Unit Loading/Fan Out

| Pin Names | Description | U.L. HIGH/LOW | Input I _{IH} /I _{IL} Output I _{OH} /I _{OL} |
|---------------------------------|--|------------------|---|
| S ₀ , S ₁ | Mode Control Inputs | 1.0/1.0 | 20 μA/-0.6 mA |
| P ₀ -P ₃ | Parallel Data Inputs | 1.0/1.0 | 20 μA/-0.6 mA |
| D _{SR} | Serial Data Input (Shift Right) | 1.0/1.0 | 20 μA/-0.6 mA |
| D _{SL} | Serial Data Input (Shift Left) | 1.0/1.0 | 20 μA/-0.6 mA |
| CP | Clock Pulse Input (Active Rising Edge) | 1.0/1.0 | 20 μA/-0.6 mA |
| $\overline{\text{MR}}$ | Asynchronous Master Reset Input (Active LOW) | 1.0/1.0 | 20 μA/-0.6 mA |
| Q ₀ -Q ₃ | Parallel Outputs | 50/33.3 | -1 mA/20 mA |

Functional Description


The 74F194 contains four edge-triggered D-type flip-flops and the necessary interstage logic to synchronously perform shift right, shift left, parallel load and hold operations. Signals applied to the Select (S₀, S₁) inputs determine the type of operation, as shown in the Mode Select Table. Signals on the Select, Parallel data (P₀-P₃) and Serial data (D_{SR}, D_{SL}) inputs can change when the clock is in either state, provided only that the recommended setup and hold times, with respect to the clock rising edge, are observed. A LOW signal on Master Reset ($\overline{\text{MR}}$) overrides all other inputs and forces the outputs LOW.

Mode Select Table

| Operating Mode | Inputs | | | | | Outputs | | | | |
|----------------|------------------------|----------------|----------------|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|
| | $\overline{\text{MR}}$ | S ₁ | S ₀ | D _{SR} | D _{SL} | P _n | Q ₀ | Q ₁ | Q ₂ | Q ₃ |
| Reset | L | X | X | X | X | X | L | L | L | L |
| Hold | H | l | l | X | X | X | q ₀ | q ₁ | q ₂ | q ₃ |
| Shift Left | H | h | l | X | l | X | q ₁ | q ₂ | q ₃ | L |
| | H | h | l | X | h | X | q ₁ | q ₂ | q ₃ | H |
| Shift Right | H | l | h | l | X | X | L | q ₀ | q ₁ | q ₂ |
| | H | l | h | h | X | X | H | q ₀ | q ₁ | q ₂ |
| Parallel Load | H | h | h | X | X | p _n | p ₀ | p ₁ | p ₂ | p ₃ |

H (h) = HIGH Voltage Level
 L (l) = LOW Voltage Level
 p_n (q_n) = Lower case letters indicate the state of the referenced input (or output) one setup time prior to the LOW-to-HIGH clock transition.
 X = Immaterial

Logic Diagram

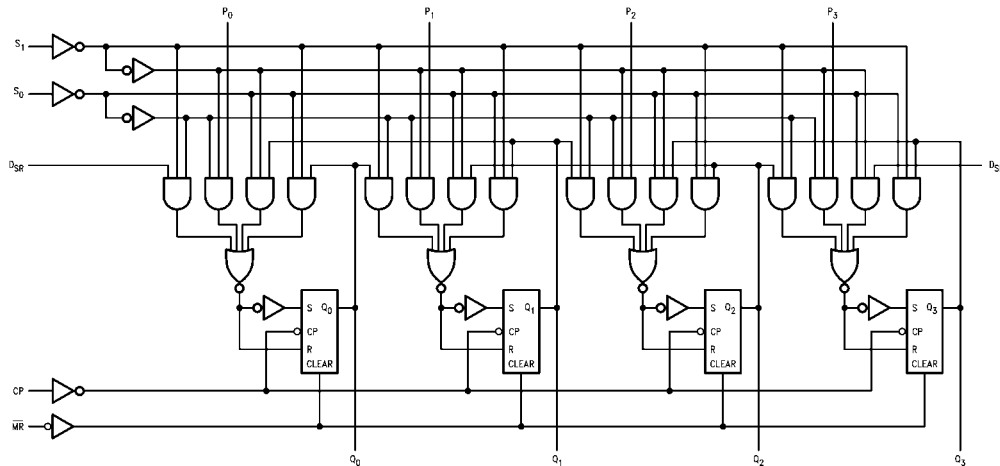

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings(Note 1)

| | |
|--|--------------------------------------|
| Storage Temperature | -65°C to +150°C |
| Ambient Temperature under Bias | -55°C to +125°C |
| Junction Temperature under Bias | -55°C to +150°C |
| V _{CC} Pin Potential to Ground Pin | -0.5V to +7.0V |
| Input Voltage (Note 2) | -0.5V to +7.0V |
| Input Current (Note 2) | -30 mA to +5.0 mA |
| Voltage Applied to Output in HIGH State (with V _{CC} = 0V) | |
| Standard Output | -0.5V to V _{CC} |
| 3-STATE Output | -0.5V to +5.5V |
| Current Applied to Output in LOW State (Max) | twice the rated I _{OL} (mA) |

Recommended Operating Conditions

| | |
|------------------------------|----------------|
| Free Air Ambient Temperature | 0°C to +70°C |
| Supply Voltage | +4.5V to +5.5V |

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.


Note 2: Either voltage limit or current limit is sufficient to protect inputs.

DC Electrical Characteristics


| Symbol | Parameter | Min | Typ | Max | Units | V _{CC} | Conditions |
|------------------|-----------------------------------|---|------------|------|-------|-----------------|---|
| V _{IH} | Input HIGH Voltage | 2.0 | | | V | | Recognized as a HIGH Signal |
| V _{IL} | Input LOW Voltage | | | 0.8 | V | | Recognized as a LOW Signal |
| V _{CD} | Input Clamp Diode Voltage | | | -1.2 | V | Min | I _{IN} = -18 mA |
| V _{OH} | Output HIGH Voltage | 10% V _{CC} 5% V _{CC} | 2.5 2.7 | | V | Min | I _{OH} = -1 mA I _{OH} = -1 mA |
| V _{OL} | Output LOW Voltage | 10% V _{CC} | | 0.5 | | | I _{OL} = 20 mA |
| I _{IH} | Input HIGH Current | | | 5.0 | μA | Max | V _{IN} = 2.7V |
| I _{BV1} | Input HIGH Current Breakdown Test | | | 7.0 | μA | Max | V _{IN} = 7.0V |
| I _{CEX} | Output HIGH Leakage Current | | | 50 | μA | Max | V _{OUT} = V _{CC} |
| V _{ID} | Input Leakage Test | 4.75 | | | V | 0.0 | I _{ID} = 1.9 μA All Other Pins Grounded |
| I _{OD} | Output Leakage Circuit Current | | | 3.75 | μA | 0.0 | V _{ID} = 150 mV All Other Pins Grounded |
| I _{IL} | Input LOW Current | | | -0.6 | mA | Max | V _{IN} = 0.5V |
| I _{OS} | Output Short-Circuit Current | -60 | | -150 | mA | Max | V _{OUT} = 0V |
| I _{CC} | Power Supply Current | | 33 | 46 | mA | Max | |

| AC Electrical Characteristics | | | | | | | | | |
|-------------------------------|--|---|-----|---|---|--|--|-------|-------|
| Symbol | Parameter | T _A = +25°C V _{CC} = +5.0V C _L = 50 pF | | | T _A = -55°C to +125°C V _{CC} = +5.0V C _L = 50 pF | | T _A = 0°C to +70°C V _{CC} = +5.0V C _L = 50 pF | | Units |
| | | Min | Typ | Max | Min | Max | Min | Max | |
| f _{MAX} | Maximum Shift Frequency | 105 | 150 | | 90 | | 90 | | MHz |
| t _{PLH} | Propagation Delay | 3.5 | 5.2 | 7.0 | 3.0 | 8.5 | 3.5 | 8.0 | ns |
| t _{PHL} | CP to Q _n | 3.5 | 5.5 | 7.0 | 3.0 | 8.5 | 3.5 | 8.0 | |
| t _{PHL} | Propagation Delay MR to Q _n | 4.5 | 8.6 | 12.0 | 4.5 | 14.5 | 4.5 | 14.0 | ns |
| AC Operating Requirements | | | | | | | | | |
| Symbol | Parameter | T _A = +25°C V _{CC} = +5.0V | | T _A = -55°C to +125°C V _{CC} = +5.0V | | T _A = 0°C to +70°C V _{CC} = +5.0V | | Units | |
| | | Min | Max | Min | Max | Min | Max | | |
| t _{S(H)} | Setup Time, HIGH or LOW | 4.0 | | 6.0 | | 4.0 | | ns | |
| t _{S(L)} | P _n or D _{SR} or D _{SL} to CP | 4.0 | | 4.0 | | 4.0 | | | |
| t _{H(H)} | Hold Time, HIGH or LOW | 1.0 | | 1.5 | | 1.0 | | | |
| t _{H(L)} | P _n or D _{SR} or D _{SL} to CP | 0 | | 1.0 | | 1.0 | | ns | |
| t _{S(H)} | Setup Time, HIGH or LOW | 10.0 | | 10.5 | | 11.0 | | | |
| t _{S(L)} | S _n to CP | 8.0 | | 8.0 | | 8.0 | | | |
| t _{H(H)} | Hold Time, HIGH or LOW | 0 | | 0 | | 0 | | ns | |
| t _{H(L)} | S _n to CP | 0 | | 0 | | 0 | | | |
| t _{W(H)} | CP Pulse Width, HIGH | 5.0 | | 5.5 | | 5.5 | | ns | |
| t _{W(L)} | MR Pulse Width, LOW | 5.0 | | 5.0 | | 5.0 | | ns | |
| t _{REC} | Recovery Time MR to CP | 9.0 | | 9.0 | | 11.0 | | ns | |

Physical Dimensions inches (millimeters) unless otherwise noted

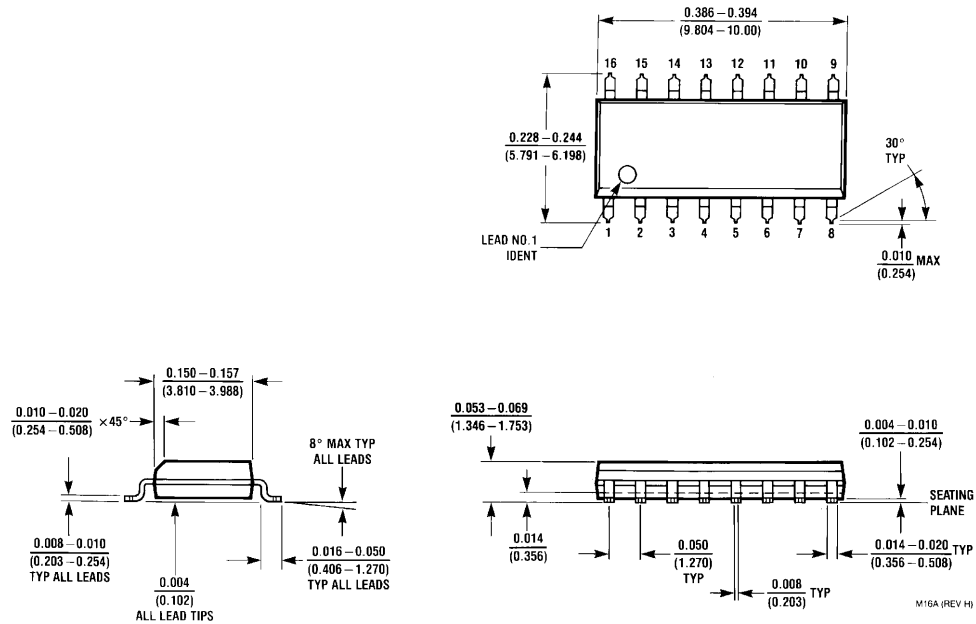

16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Package Number M16A

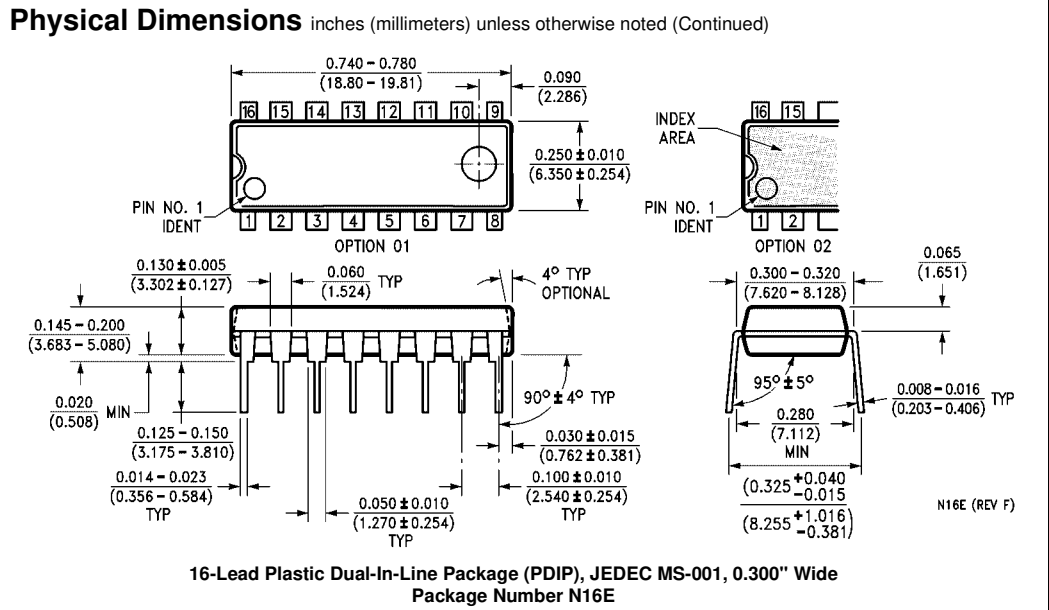

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com