



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





AMP EXTRACTION TOOL P/N 753760-1
FOR EXTRACTING LOW PROFILE, MINI AMP-IN*
TERMINALS FROM CONNECTOR HOUSINGS
INSTRUCTION SHEET

IS - 207J	
Released	8-25-82
Revised	1-8-85

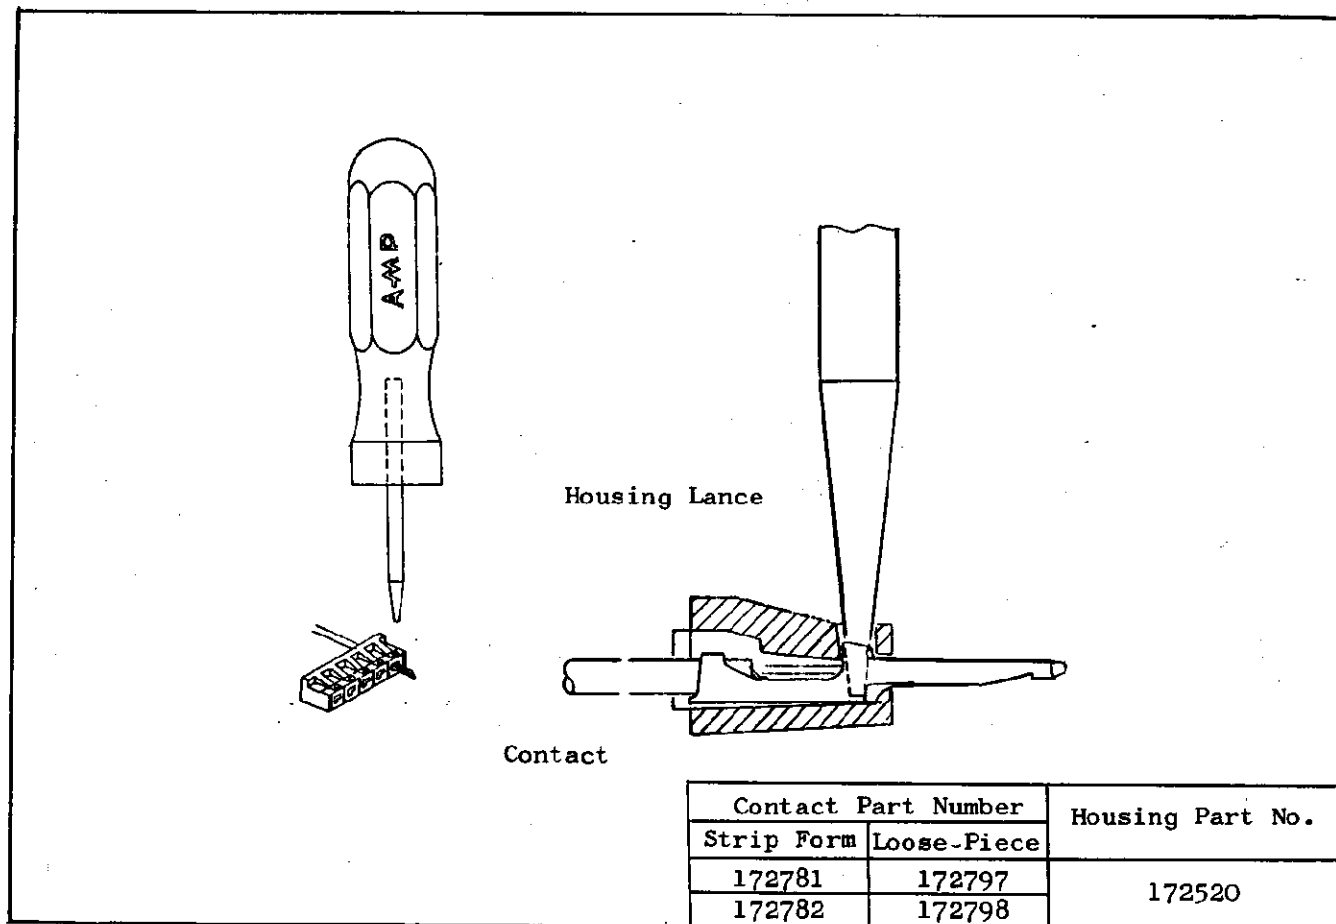


Fig. 1

1. INTRODUCTION:

AMP* extraction tool P/N 753760-1 has been designed to extract Mini AMP-IN* terminals from header housing. Read this instruction sheet carefully, before you start operation.

2. EXTRACTION PROCEDURE:

- (a) Hold the tool as shown in Fig. 1 (left), and apply the tip end of the tool into the groove of housing where the housing lance is provided until it bottoms in the groove. (See Fig. 1, (right)).

- (b) With the tip end of the tool bottomed in the groove, turn lightly to incline the tool grip, so as to dig up with the tip end. This will unlock the contact, and it can be removed easily by pulling the crimped wire lightly by the fingers. (See Fig. 1.)

NOTE:

It is important to confirm if the tool tip end is just correctly bottomed in the groove. Excessive forcing is not necessary to extract terminals.