



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Antistatic Clear Cellulose



Antistatic Clear Cellulose with Symbols

Tape is wound on a low-sloughing plastic core.

## ESD Cellulose Tape

### For general purpose applications

- Meets ANSI/ESD S20.20 and packaging standard ANSI/ESD S541
- Film Thickness: 1.9 mil 0.0019", (0.06 mm)
- Adhesive: Rubber based - non staining, absorbs moisture
- Film surface resistance:  $1 \times 10^9$  to  $< 1 \times 10^{11}$  ohms per ANSI/ESD STM11.11
- Temperature Range -10°C to 71°C (14°F to 160°F)  
100°C for 10 min max
- Available in clear, and clear with ESD symbols. Marking is approved symbols of Mil STD-1285\*\* and ANSI/ESD S8.1.
- Symbols printed in between film and adhesive; will not rub off.
- Manufactured in North America

Tape	0.5"	0.75"	1"	Core	Length
Antistatic Clear Cellulose	<a href="#">780000</a>	<a href="#">780001</a>		1"	36 yds
	<a href="#">780002</a>	<a href="#">780003</a>	<a href="#">780004</a>	3"	72 yds
Antistatic Clear Cellulose with Symbols	<a href="#">780005</a>	<a href="#">780006</a>	<a href="#">780007</a>	3"	72 yds

Width tolerance  $\pm 1/32$ "

### Wescorp Tape Storage and Limited Warranty:

Users shall determine the suitability of the product for its intended use. For best results, tape inventory should be continually replenished. It is recommended that rolls of tape be stored flat and rotated (flipped over to the other side) periodically. Tapes should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Tape should not be stored in ultraviolet sunlight, moisture, or heat. Tape over one year old should be evaluated by the user to determine acceptability for the user's application. Desco Industries, Inc. recommends those tracking useful life of product to use shipping/invoice date as Desco Industries, Inc. expressly warrants that for a period of one (1) year from the date of purchase, our Wescorp Brand ESD Tape will be free of defects in material (parts) and workmanship (labor). See details of Limited Warranty online at [StaticControl.com/Warranty.aspx](http://StaticControl.com/Warranty.aspx)


\*Wescorp is a Desco Industries brand.

Note: Tape rolls may vary slightly in color.

\*\*Military organizations sometimes use MIL-STD-1285 for hardware marking and that document once required the use of the "three arrows in a circle" symbol. That symbol has been changed for consistency with industry marking to the "hand in triangle" ESD Susceptibility symbol." (Ref: ESD TR20.20 section 5.3.14.1)

Tape widths are nominal  
metric  $\pm 0.8$  mm ( $\pm 1/32$ ").

1/2" is 12 mm nominal or 0.472"  
3/4" is 18 mm nominal or 0.709"  
1" is 24 mm nominal or 0.945"

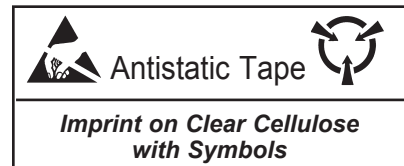

### RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Specifications and procedures subject to change without notice.

### WESCORP\* ESD CELLULOSE TAPE, PLASTIC CORE

926 JR Industrial Drive, Sanford, NC 27332  
WEB SITE: [StaticControl.com](http://StaticControl.com)  
PHONE (919) 718-0000

DRAWING  
NUMBER  
780000

DATE  
July  
2015

# SCS