



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



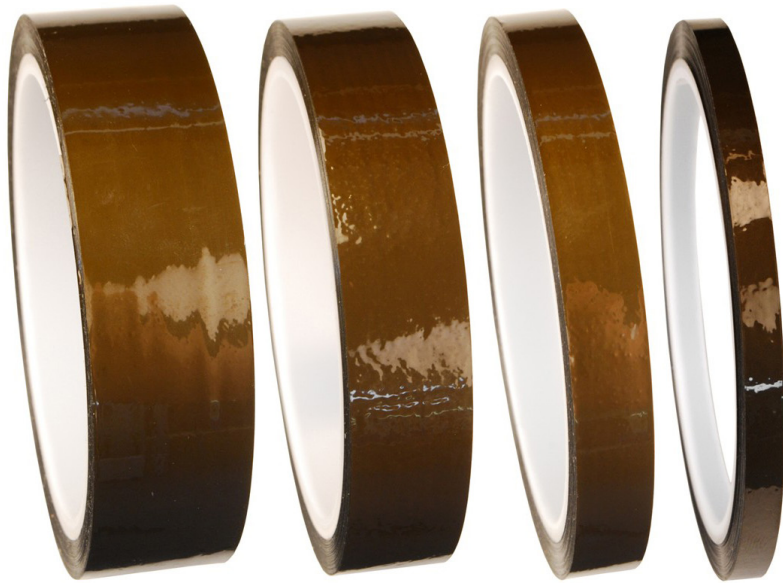

Tape is wound on a plastic core

ESD High Temp Polyimide Tape

- Used in applications masking PCB gold features for wave soldering and IR reflow ovens
- Low Charging Polyimide Film With Polysiloxide Adhesive; 2.4 MILS (0.0024 inch) overall thickness
- Surface Resistance 1×10^8 to $< 1 \times 10^{11}$ ohms Tested per ANSI/ESD STM11.11
- Temperature Resistance to a Maximum of 572°F (300°C) for 10 Second Max
- Manufactured in Ireland

Tape	0.25"	0.5"	0.75"	1"	Core	Length
ESD High Temp Polyimide	780008	780009	780010	780011	3"	36 yd

Wescorp Tape Storage and Limited Warranty:

Users shall determine the suitability of the product for its intended use. For best results, tape inventory should be continually replenished. It is recommended that rolls of tape be stored flat and rotated (flipped over to the other side) periodically. Tapes should be stored in a dry, well ventilated room with a reasonably consistent temperature of 68°F (20°C) and be protected from exposure to direct sunlight. Tape should not be stored in ultraviolet sunlight, moisture, or heat. Tape over one year old should be evaluated by the user to determine acceptability for the user's application. Desco Industries, Inc. recommends those tracking useful life of product to use shipping/invoice date as Desco Industries, Inc. expressly warrants that for a period of one (1) year from the date of purchase, our Wescorp Brand ESD Tape will be free of defects in material (parts) and workmanship (labor). See details of Limited Warranty online at StaticControl.com/Warranty.aspx

Tape widths are nominal metric ± 0.8 mm ($\pm 1/32$ ").

- 1/4" is 6 mm nominal or 0.236"
- 1/2" is 12 mm nominal or 0.472"
- 3/4" is 18 mm nominal or 0.709"
- 1" is 24 mm nominal or 0.945"

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

*Wescorp is a Desco Industries brand.

Specifications and procedures subject to change without notice.

WESCORP* ESD HIGH TEMP POLYIMIDE TAPE, PLASTIC CORE

926 JR Industrial Drive, Sanford, NC 27332
 WEB SITE: StaticControl.com
 PHONE (919) 718-0000

DRAWING NUMBER
780008

DATE
July
2015

