



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



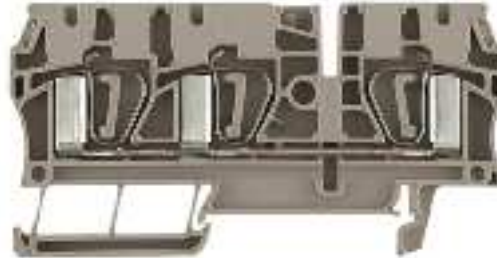

General ordering data

Order No.	7904180000
Part designation	ZDU 4/3AN
Version	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
EAN	4008190575953
Qty.	50 pc(s).

Product notes

Note, technical data	When using twin ferrules, the rated voltage is 690 V.
Product description	Z-series standard ranges provide solutions for conductor cross-sections from 0.05 to 35 mm ² .

PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA00ATEX2107U
Download, German	KEMA00ATEX2107U_d.pdf
Download English	KEMA00ATEX2107U_e.pdf
IECEX Certificate of Conformity	IECEXULD05.0009U
ATEX voltage	550 V
ATEX current	28 A
ATEX conductor cross-section	4 mm ²
IECEX voltage	550 V
IECEX current	28 A
IECEX conductor cross-section	4 mm ²
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEX-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

Additional technical data

Colour of insulating material	dark beige
Connection direction	top

Additional technical data

End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	3
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	Z-series
Type of connection	Clamped
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Feed-through terminal

CSA rating data

Voltage (CSA)	600 V
CSA current	35 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 10

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	4 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²
Type of connection	Tension clamp connection
2nd type of connection	clamped
Connection direction	top
No. of connections	3
Stripping length	12 mm
Blade size	0.6 x 3.5 mm
Gauge to IEC 60947-1	A4
Solid, min.	0.5 mm ²
Solid, max.	6 mm ²
Stranded, min.	0.5 mm ²
Stranded, max.	6 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	6 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	4 mm ²
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm ²
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	4 mm ²
Twin wire-end ferrule, min.	0.5 mm ²
Twin wire end ferrule, max.	1.5 mm ²

Conductors for clamping (rated connection)

AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 10
AWG conductor size, min.	0.13 mm ²
AWG conductor size, max.	5.26 mm ²

Dimensions

Width	6.1 mm
Height of lowest version	43.5 mm
Length	83.5 mm
TS 35 offset	50.5 mm

Rating data

Rated cross-section	4 mm ²
Rated voltage	800 V
Rated impulse voltage	8 kV
Rated current	32 A
Standards	IEC 60947-7-1
Current with max. conductor	41 A
Pollution severity	3

UL rating data

Voltage (UL)	600 V
Current (UL)	33 A
Min. cross-section (UL)	AWG 26
Max. cross-section (UL)	AWG 10

Approvals

Approvals institutes



Downloads

STEP	7904180000_28611_ZDU_4-3AN_STP.stp
------	------------------------------------

Classifications

eClass 4.1	27-14-11-20
eClass 5.0	27-14-11-20
eClass 5.1	27-14-11-20

Similar products

Order No.	Part designation	Version
1632050000	ZDU 4	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1632060000	ZDU 4 BL	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, blue, TS 35
1683590000	ZDU 4 GE	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, yellow, TS 35
1683630000	ZDU 4 GR	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, grey, TS 35
1636830000	ZDU 4 OR	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, Orange, TS 35
1683580000	ZDU 4 RT	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, red, TS 35
1683650000	ZDU 4 SW	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, black, TS 35
1683640000	ZDU 4 WS	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, white, TS 35
1651900000	ZDU 4/10/BEZ	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
7904190000	ZDU 4/3AN BL	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, blue, TS 35
7904290000	ZDU 4/4AN	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
7904300000	ZDU 4/4AN BL	Feed-through terminal, 4 mm ² , Tension clamp connection, Wemid, blue, TS 35