



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# M2 DIN rail mounted electronic timers (22.5 mm)

## Relay outputs

- Multi-function or mono-function
- Multi-range (8 ranges)
- Dual-voltage
- 1 changeover 8 A / 250 V
- Display of output states by 2 LEDs
- Wide choice of functions
- Front terminals

### Characteristics

#### Accuracy

Repetition accuracy (with constant parameters)	± 0.5 %
Variation according to VDE 0435 0 • 40 °C	± 3 %
-20 • 60 °C	± 5 %
Min. control pulse	0.02 s
Maximum reset time by de-energisation	0.100 s
Immunity from micro power cuts	<0.02 s

#### Output specification

Nominal current	8 A ~ 1 A ~
Nominal voltage	250 V ~
Rated power	2000 VA - 30 W
Maximum admissible current	15 A < 0.01 s
Minimum current	50 mA ~
Electrical life at I max 250 V ~ resistive (cycles)	1.5 • 10 <sup>5</sup>

Max. permitted number of operations per hour at I max 250 V ~ resistive	360
Mechanical life (operations)	2 x 10 <sup>7</sup>

#### Function and use

Display of output state by LED	output in operation	Green LED
	power on	Red LED

Voltage variation	± 15 % Un 127 V-10% 240 V+10%
-------------------	----------------------------------

Maximum absorbed power	1.5 W / 24 V 5 VA / 110-127 V 10 VA / 220-240 V
------------------------	---

Temperature limits	Use Stored	-20 °C + 60 °C -30 °C + 70 °C
-----------------------	---------------	----------------------------------

Insulation according to standard VDE 0110 - IEC 255 Group C	250 V ~
--	---------

Protection class according to NFC 20010 - IEC 529 - DIN 40050	IP40
--	------

Conformity to standards IEC 255 VDE 0435-2021	•
--	---

Protection from voltage surge (in joules)	2
--	---

Connection: by terminal blocks with cable guide and front-access captive screws	•
--	---

Terminal capacity : multi or single wire 1 or 2 leads	2.5 mm <sup>2</sup>
--	---------------------

Mounting on symmetrical DIN rail 35 mm EN 50022	•
--	---

Weight (g)	110
------------	-----

Products currently being replaced by the TR range

### Timing

#### Types

#### Part numbers (and voltages)

24 V ~ / 110 • 127 V 50 • 60Hz
24 V ~ / 220 • 240 V 50 • 60Hz
24 V ~ / 50 • 60Hz
110 • 127 V 50 • 60Hz
220 • 240 V 50 • 60Hz
N.B. : For 48 V ~ supply
Additional resistor : 560 Ω 2W / 24 V ~

#### Functions

#### Relay outputs

#### Nominal current

#### Timing ranges ( 8 available options)

0.1 s to 1 s	0.4 min to 4 min	1 h to 10 h
1 s to 10 s	1 min to 10 min	6 h to 60 h
6 s to 60 s	6 min to 60 min	

#### Function diagrams

#### Terminal connections


- A1 - A2 : Supply
- A3 : Bridge (A2 - A3) for 24V supply
- B1 - B2 : Control contact
- 15 - 16 - 18 : Timed output contact
- Galvanic insulation Input-Output




#### Accessories

Panel adaptor **79 237 806**

#### Function diagrams

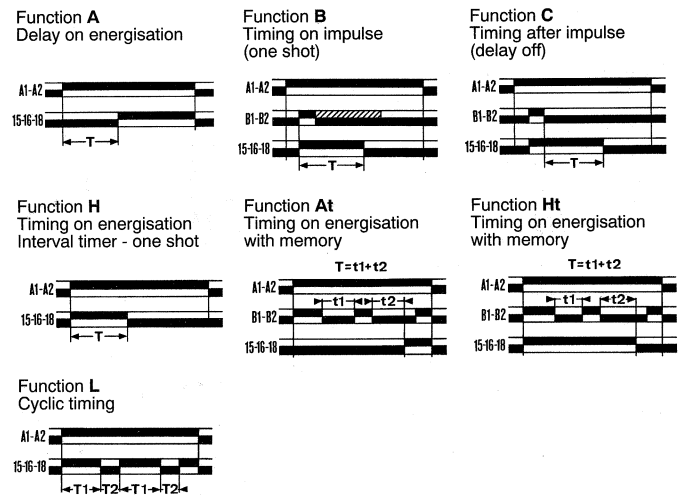


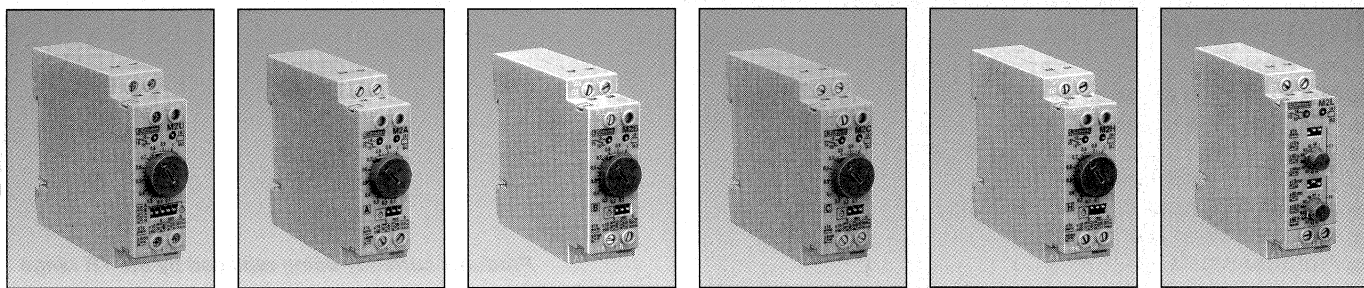



0.1 s • 60 h		0.1 s • 60 h		0.1 s • 60 h		0.1 s • 60 h		0.1 s • 60 h		0.1 s • 60 h	
M2 U		M2 A		M2 B		M2 C		M2 H		M2 L	
88 881 005	—	—	—	—	—	—	—	—	—	88 881 505	—
88 881 006	—	—	—	—	—	—	—	—	—	88 881 506	—
—	—	88 881 100	—	88 881 200	—	88 881 300	—	88 881 400	—	—	—
—	—	88 881 102	—	88 881 202	—	88 881 302	—	88 881 402	—	—	—
—	—	88 881 104	—	88 881 204	—	88 881 304	—	88 881 404	—	—	—
•	•	•	•	•	•	•	•	•	•	•	•

1  
2

Multi-function with selection	Mono-function	Mono-function	Mono-function	Mono-function	Mono-function
A B C H At Ht	A	B	C	H	L
1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover
8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡
•	•	•	•	•	•

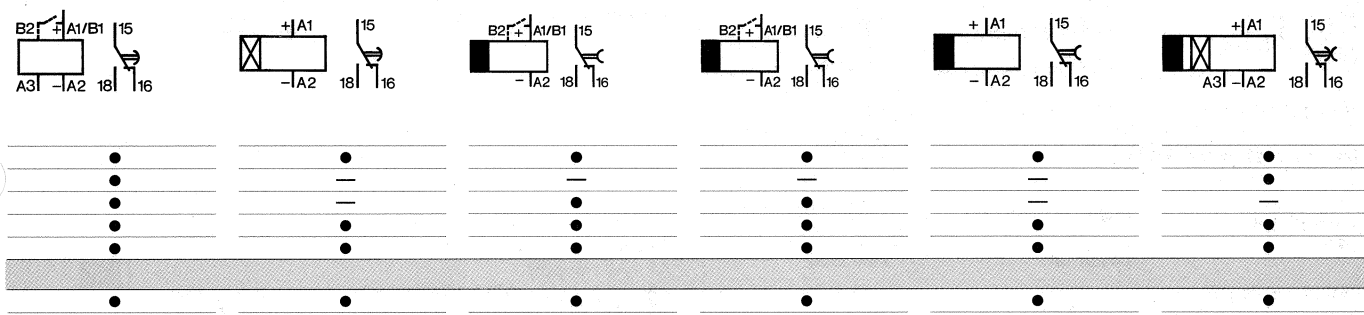

3

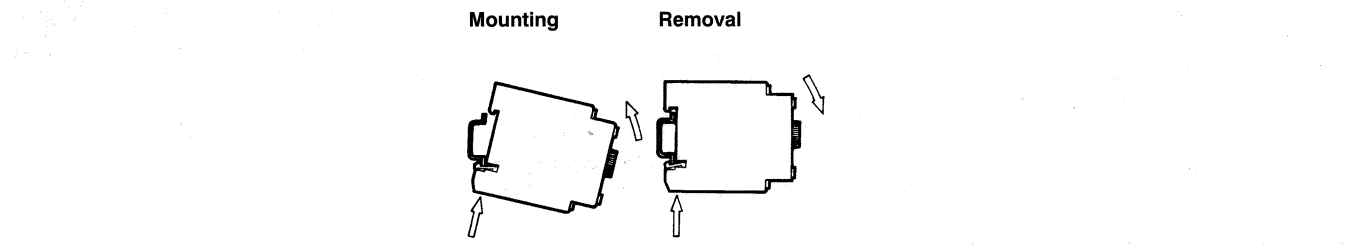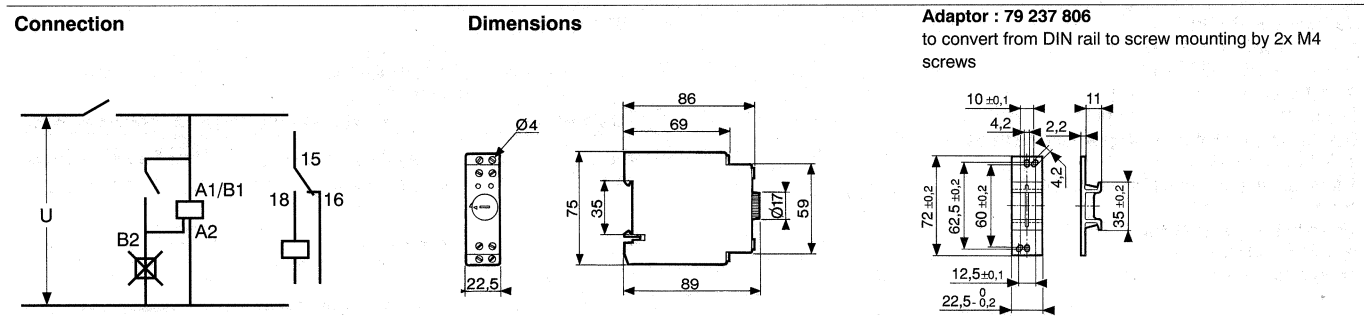

**To order, specify :**

**Standard products, non stocked**

1 Type     
 2 Part number     
 3 Accessory

Example : M2 U electronic timer - 88 881 006 - Panel adaptor 79 237 806

# M2 DIN rail mounted electronic timers (22.5 mm)

## Relay outputs

- Multi-function or mono-function
- Multi-range (8 ranges)
- Dual-voltage
- 1 changeover 8 A / 250 V
- Display of output states by 2 LEDs
- Wide choice of functions
- Front terminals

## Characteristics

### Accuracy

Repetition accuracy (with constant parameters)		± 0.5 %
Variation according to	0 • 40 °C	± 3 %
VDE 0435	-20 • 60 °C	± 5 %
Min. control pulse		0.02 s
Maximum reset time by de-energisation		0.100 s
Immunity from micro power cuts		<0.02 s
Minimum time on energisation	Ma - Mb - Mc K	1s 1s 1s 0.30s
Minimum time on de-energisation	Ma - Mb - Mc	0.2s 1s 1s

### Output specification

Nominal current	Functions K - R	5 A ~ 1 A ~
	Other functions	8 A ~ 1 A ~
Nominal voltage		250 V ~
Rated power	Functions K - R	1250 VA - 30 W
	Other functions	2000 VA - 30 W
Maximum admissible current		15 A < 0.01 s
Minimum current		50 mA ~
Electrical life at I max 250 V ~ resistive (cycles)	Function K	10 <sup>5</sup>
	Other functions	1.5 • 10 <sup>5</sup>
Max. permitted number of operations per hour at I max 250 V ~ resistive		360
Mechanical life (operations)		2 x 10 <sup>7</sup>

### Function and use

Display of output state by LED	output in operation	Green LED
	power on	Red LED
Voltage variation		± 15 % Un 127 V-10% 240 V+10%
Maximum absorbed power		1.5 W / 24 V 5 VA / 110-127 V 10 VA / 220-240 V
Temperature limits	Use	-20 °C + 60 °C
	Stored	-30 °C + 70 °C
Insulation according to the standard VDE 0110 - IEC 255 VDE 0435-2021		250 V ~
Protection class according to UTE C 20010 - IEC 529 - DIN 40050		IP40
Conformity to standards IEC 255 VDE 0435-2021		•
Protection from voltage surge (in joules)		2
Connection: by terminal blocks with cable guide and front-access captive screws		•
Terminal capacity : multi or single wire 1 or 2 leads		2.5 mm <sup>2</sup>
Mounting on symmetrical DIN rail 35 mm EN 50022		•
Weight (g)		110

Products currently being replaced by the TR range

## Timing

### Types

#### Part numbers (and voltages)

24 V ~ / 110 • 127 V 50 • 60Hz
24 V ~ / 220 • 240 V 50 • 60Hz
24 V ~ / 50 • 60Hz
110 • 127 V 50 • 60Hz
220 • 240 V 50 • 60Hz
24 • 240 V ~ 50 • 60Hz
N.B. : For 48 V ~ supply
Additional resistor : 560 Ω 2W / 24V ~

### Functions

#### Relay output

#### Nominal current


#### Timing ranges (8 available options)

0.1 s to 1 s	0.4 min to 4 min	1 h to 10 h
1 s to 10 s	1 min to 10 min	6 h to 60 h
6 s to 60 s	6 min to 60 min	
Fixed pulse		

### Function diagrams

### Terminal connections

- A1 - A2 : Supply
- A3 : Bridge (A2 - A3) for 24V supply
- 15 - 16 - 18 : Timed output contact
- B1 - B2 : Control contact
- 15 - 16 - 18 : Instantaneous contact 1
- B2 - B3 - A3 : Instantaneous contact 2
- Galvanic insulation Input-Output




### Accessories

Panel adaptor **79 237 806**

### Function diagrams


#### Function D Flip-flop



#### Function E Flip-flop




#### Function K Delay on de-energisation




#### Function O Delayed safe-guard




#### Function R Instantaneous relay



#### Function S Star-delta



(1) B2 B3  
• • 0,1s  
— 0,035s

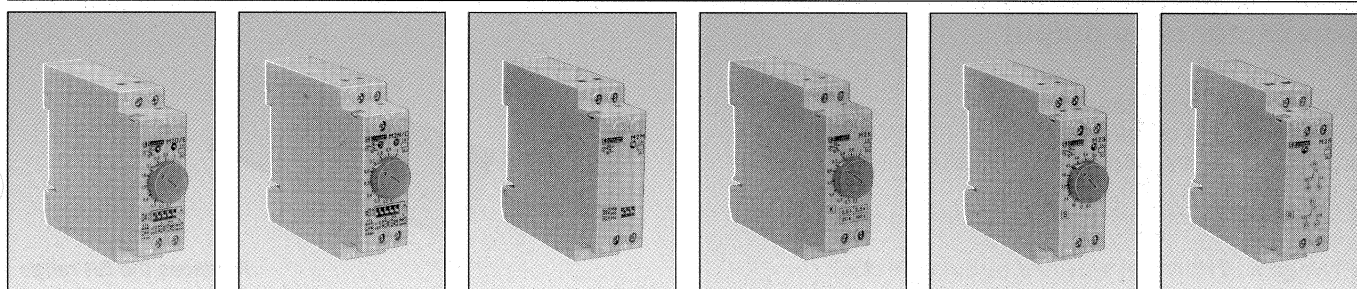


0.1 s • 60 h	0.1 s • 60 h	—	0.06 s • 160 s	3 s • 60 s	—
M2 D/E	M2 N/O	M2 M	M2 K	M2 S	M2 R
88 883 105	88 883 205	88 883 305	—	88 883 505	—
88 883 106	88 883 206	88 883 306	—	88 883 506	—
—	—	—	—	—	88 883 600
—	—	—	—	—	88 883 602
—	—	—	88 883 408	—	88 883 604
—	—	—	—	—	—
•	•	•	—	•	•






1  
2

Multi-function with selection	Multi-function with selection	Multi-function with selection	Mono-function	Mono-function	Mono-function
D/E	N/O	Ma/Mb/Mc	K	S	R
1 changeover	1 changeover	1 changeover	1 changeover	1 changeover	2 changeover
8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~

•	•	—	0.06 s • 0.6 s 2 s • 20 s	0.25 s • 2.5 s 16 s • 160 s	3 s • 60 s	—
0.5 s ± 0.2						

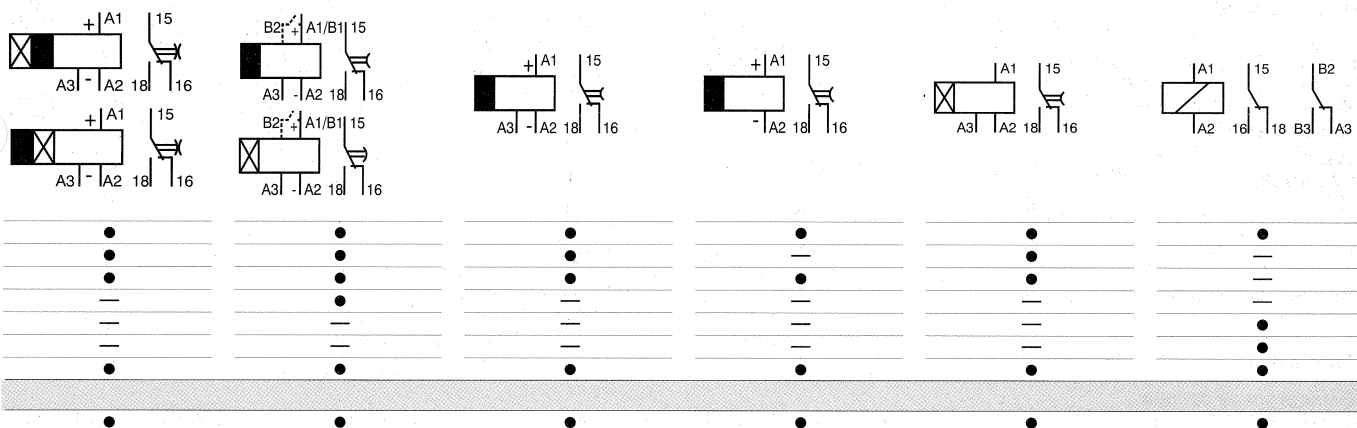

3

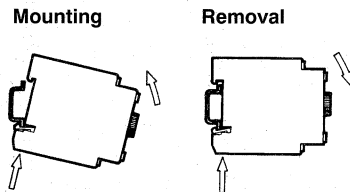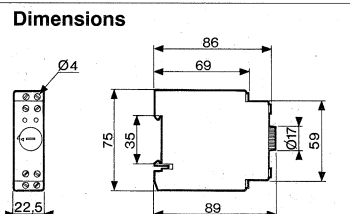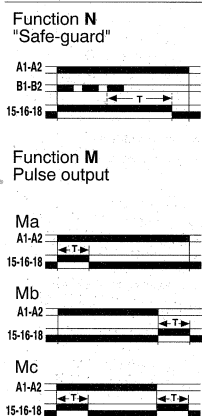

**To order, specify :**

Standard products, non stocked	<b>1</b> Type	<b>2</b> Part number	<b>3</b> Accessory
Example : M2 D/E electronic timer - 88 883 105 - Panel adaptor 79 237 806			