



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PROTOTYPING / WIRING

Premium Female/Female Jumper Wires – 40 x 3" (75mm)

PRODUCT ID: 794

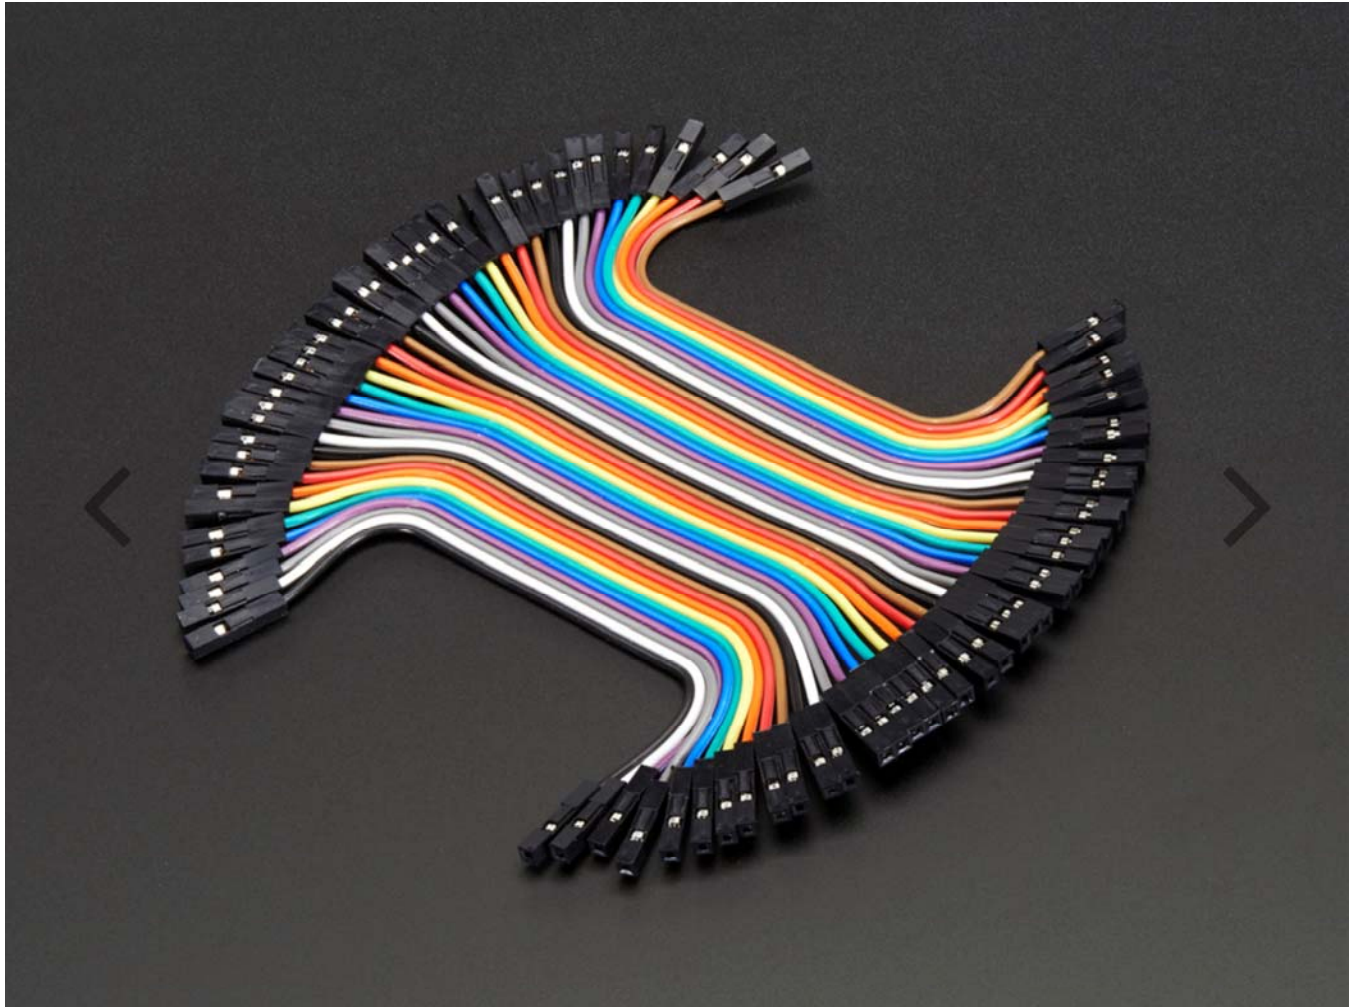

DESCRIPTION

Handy for making wire harnesses or jumpering between headers on PCB's. These premium jumper wires are 3" (75mm) long and come in a 'strip' of 40 (4 pieces of each of ten rainbow colors). They have 0.1" female header contacts on either end and fit cleanly next to each other on standard-pitch 0.1" (2.54mm) header. The best part is they come in a 40-pin ribbon cable. You can always pull the ribbon wires off to make individual jumpers, or keep them together to make neatly organized wire harnesses.

We have these in three handy lengths: 3"/75mm, 6"/160mm and 12"/300mm. If you want the male/male type, we have those too!

For best results, when plugging these in a line, have the sides with the 'silver latch bit' sticking out since that side is a tiny bit wider than 0.1"
