



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Features

- > Ultra small SMD type crystal units..
- > High precision characteristics covering up to wide frequency range.
- > Higher frequency stability and reliability.
- > Excellent for reducing EMI effect.
- > The best choice of Bluetooth, wireless communication set, DSC, PDA, mobile phone and USB interface card.
- > RoHS Compliant / Pb Free


Electrical Specifications

Item / Type	7B
Frequency Range	8 ~ 100 MHz
Frequency Tolerance (at 25 °C)	± 10 ppm, or specify
Frequency Stability Over Operating Temperature Range	± 10 ppm (-20 ~ +70 °C), or specify
Operating Temperature Range	- 40 ~ + 85 °C
Shunt Capacitance (C0)	5 pF Max. (2 pF typical)
Drive Level	1 ~ 100 μW (10 μW typical)
Load Capacitance	10 pF, or specify
Aging (at 25 °C)	± 3 ppm / year Max.
Storage Temperature Range	- 55 ~ + 125 °C

Equivalent Series Resistance(ESR)

Fundamental		3rd Overtone	
8 ~ 12 MHz	100 Ω Max.	40 ~ 60 MHz	120 Ω Max.
12 ~ 48 MHz	40 Ω Max.	60 ~ 100 MHz	80 Ω Max.

Dimensions

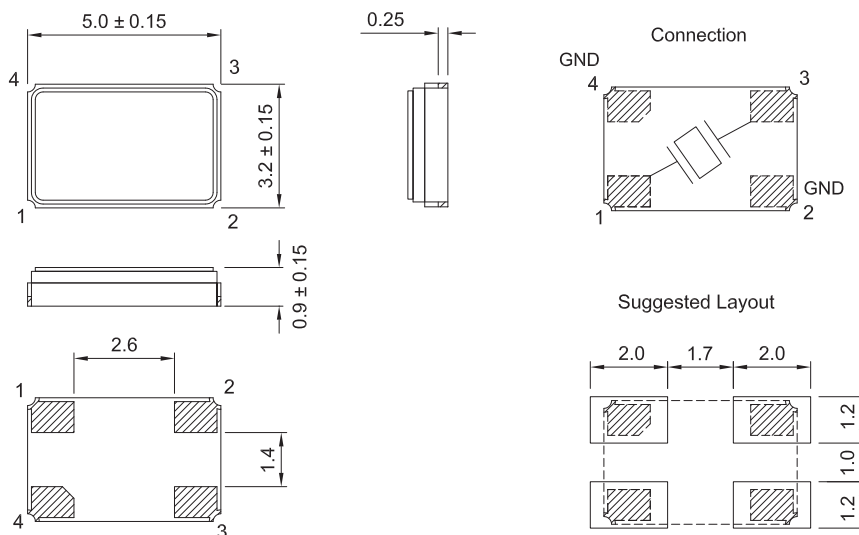

Units:mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.