



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



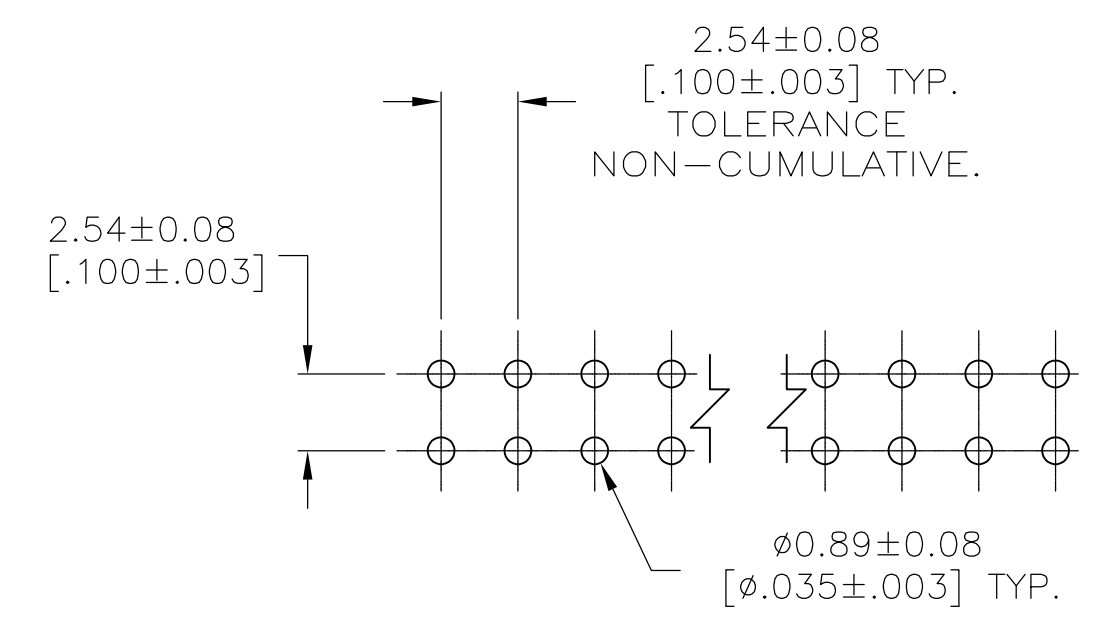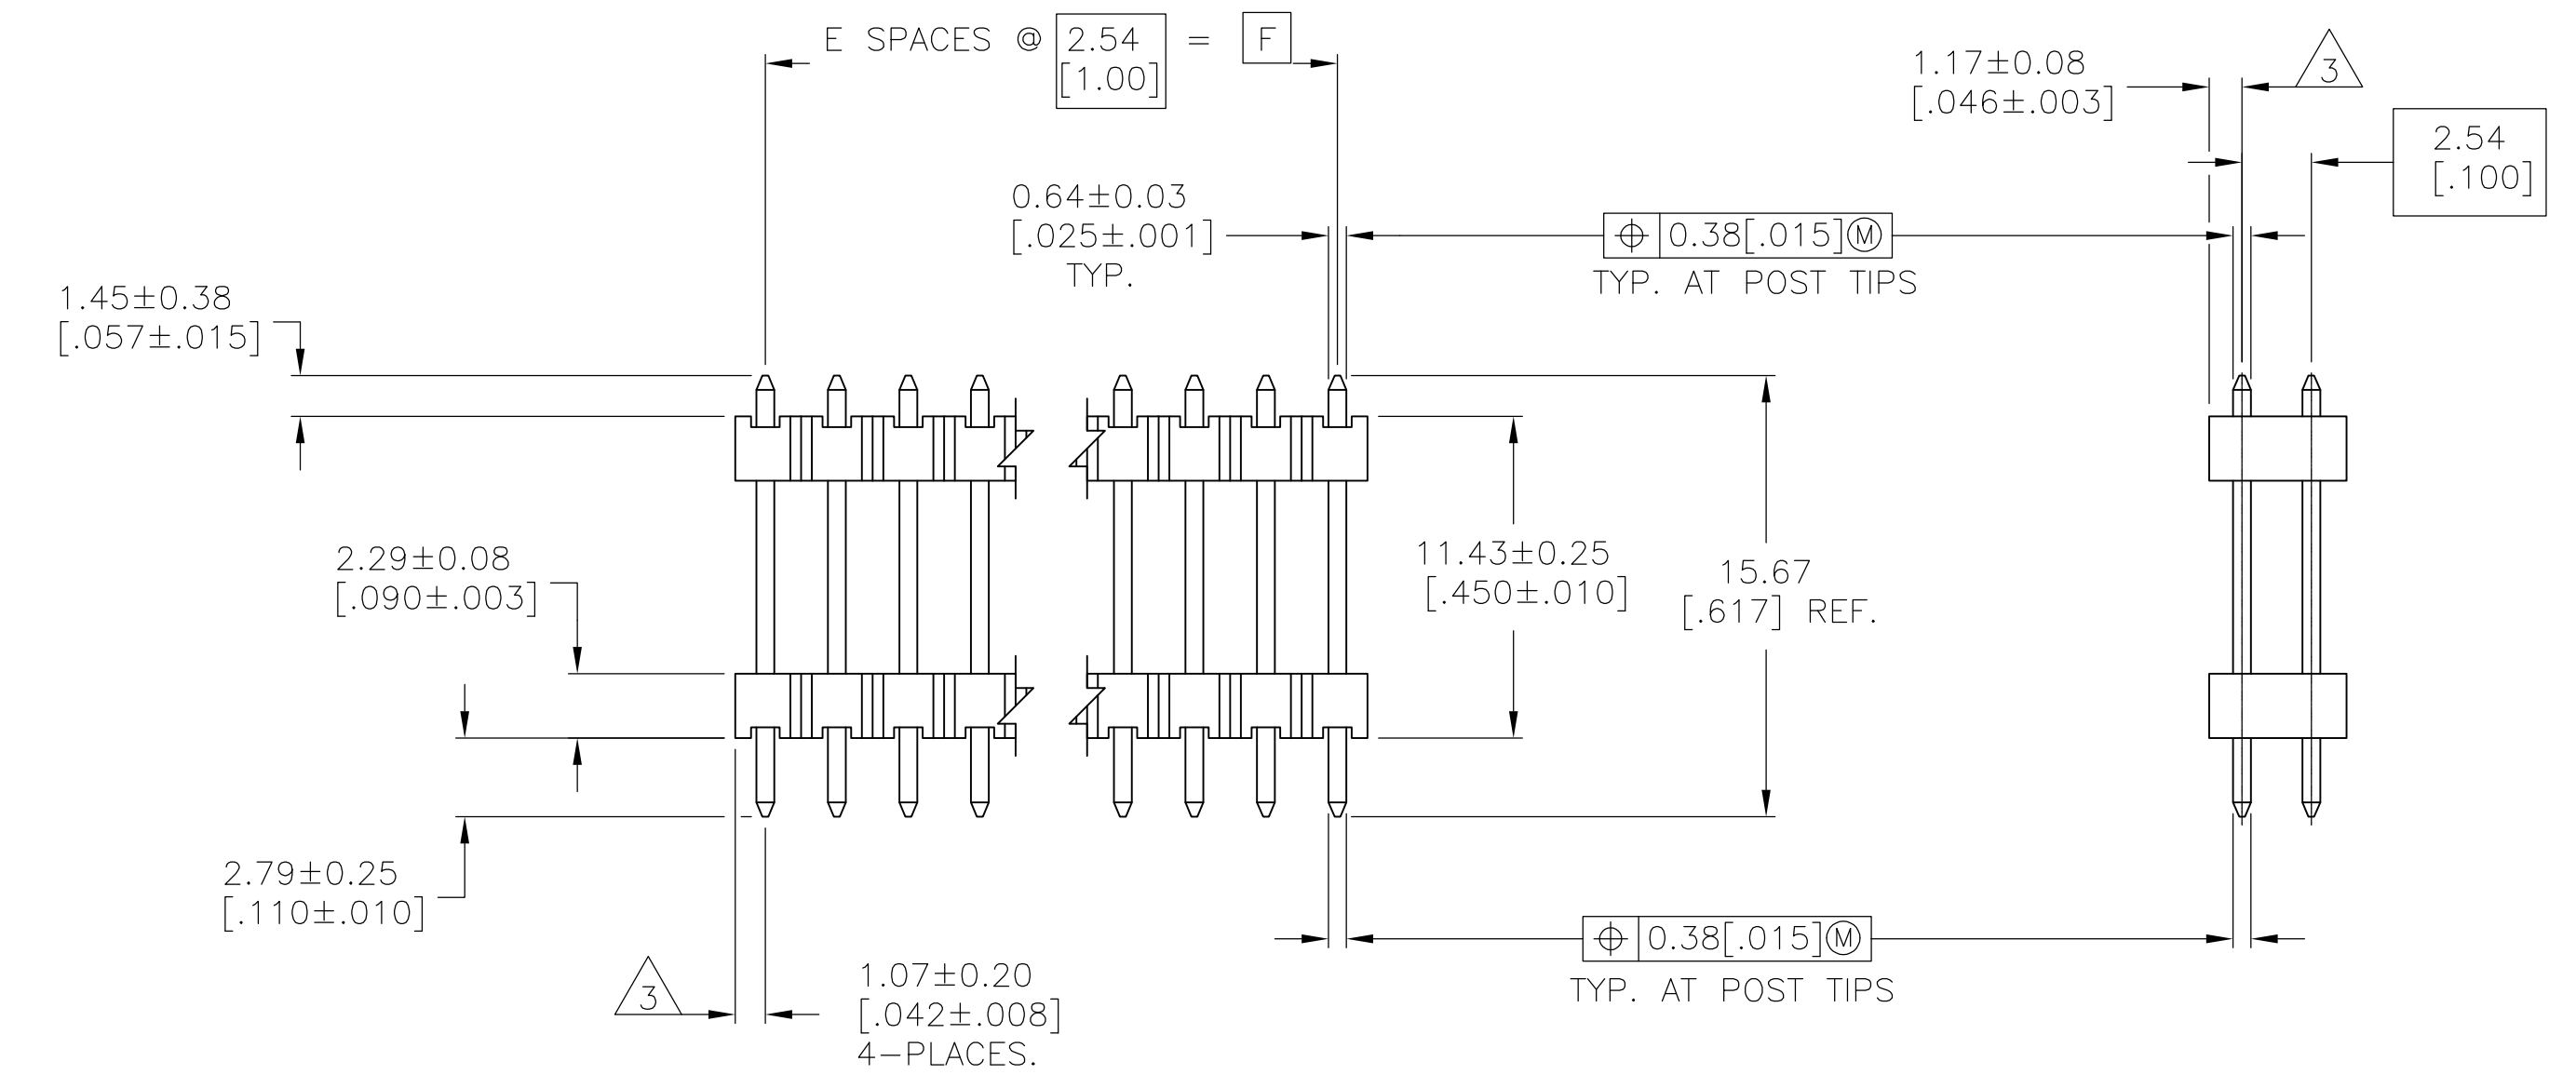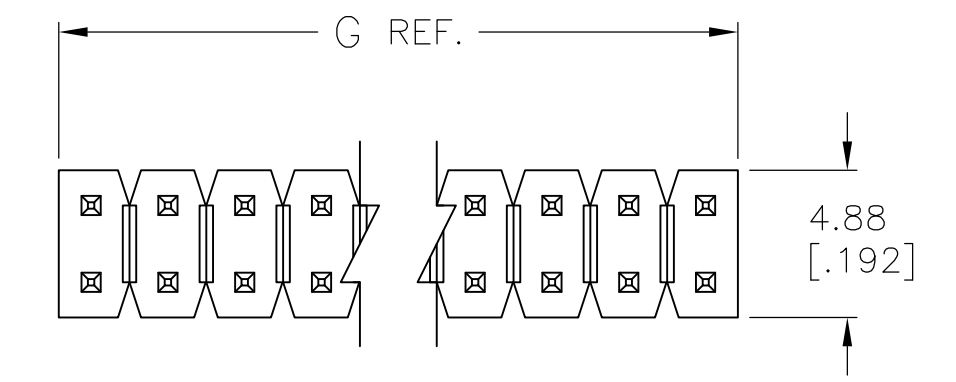

RECOMMENDED HOLE LAYOUT

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- FINISH: 0.00254-0.00508 [.000100-.000200] BRIGHT TIN-LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
- FINISH: 0.00254-0.00508 [.000100-.000200] BRIGHT MATTE-TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

△5	101.19 [3.984]	99.06 [3.900]	39	80	4-146488-0
△5	98.65 [3.884]	96.52 [3.800]	38	78	3-146488-9
△5	96.11 [3.784]	93.98 [3.700]	37	76	3-146488-8
△5	93.57 [3.684]	91.44 [3.600]	36	74	3-146488-7
△5	91.03 [3.584]	88.90 [3.500]	35	72	3-146488-6
△5	88.49 [3.484]	86.36 [3.400]	34	70	3-146488-5
△5	85.95 [3.384]	83.82 [3.300]	33	68	3-146488-4
△5	83.41 [3.284]	81.28 [3.200]	32	66	3-146488-3
△5	80.87 [3.184]	78.74 [3.100]	31	64	3-146488-2
△5	78.33 [3.084]	76.20 [3.000]	30	62	3-146488-1
△5	75.79 [2.984]	73.66 [2.900]	29	60	3-146488-0
△5	73.25 [2.884]	71.12 [2.800]	28	58	2-146488-9
△5	70.71 [2.784]	68.58 [2.700]	27	56	2-146488-8
△5	68.17 [2.684]	66.04 [2.600]	26	54	2-146488-7
△5	65.63 [2.584]	63.50 [2.500]	25	52	2-146488-6
△5	63.09 [2.484]	58.42 [2.400]	24	50	2-146488-5
△5	60.55 [2.384]	58.42 [2.300]	23	48	2-146488-4
△5	58.01 [2.284]	55.88 [2.200]	22	46	2-146488-3
△5	55.47 [2.184]	53.34 [2.100]	21	44	2-146488-2
△5	52.93 [2.084]	50.80 [2.000]	20	42	2-146488-1
△5	50.39 [1.984]	48.26 [1.900]	19	40	2-146488-0
△5	47.85 [1.884]	45.72 [1.800]	18	38	1-146488-9
△5	45.31 [1.784]	43.18 [1.700]	17	36	1-146488-8
△5	42.77 [1.684]	40.64 [1.600]	16	34	1-146488-7
△5	40.23 [1.584]	38.10 [1.500]	15	32	1-146488-6
△5	37.69 [1.484]	35.56 [1.400]	14	30	1-146488-5
△5	35.15 [1.384]	33.02 [1.300]	13	28	1-146488-4
△5	32.61 [1.284]	30.48 [1.200]	12	26	1-146488-3
△5	30.07 [1.184]	27.94 [1.100]	11	24	1-146488-2
△5	27.53 [1.084]	25.40 [1.000]	10	22	1-146488-1
△5	24.99 [.984]	22.86 [.900]	9	20	1-146488-0
△5	22.45 [.884]	20.32 [.800]	8	18	146488-9
△5	19.91 [.784]	17.78 [.700]	7	16	146488-8
△5	17.37 [.684]	15.24 [.600]	6	14	146488-7
△5	14.83 [.584]	12.70 [.500]	5	12	146488-6
△5	12.29 [.484]	10.46 [.400]	4	10	146488-5
△5	9.75 [.384]	7.62 [.300]	3	8	146488-4
△5	7.21 [.284]	5.08 [.200]	2	6	146488-3
△5	4.67 [.184]	2.54 [.100]	1	4	146488-2
△5	2.13 [.084]	-	-	2	146488-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± 0.51[.02]	3 PLC ± 0.127[.005]	4 PLC ± 0.0127[.0005]	ANGLES ±
-------------------------	--	-----------	-----------	-------------------	---------------------	-----------------------	----------

MATERIAL: △4 FINISH: SEE-TABLE

RESTRICTED CUSTOMER

THIS DRAWING IS A CONTROLLED DOCUMENT. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.0127[.0005] ANGLES ±


DIN T. HOFFMAN 05DEC95
CHK G. DUBNICZKI 18DEC95
APVD G. DUBNICZKI 18DEC95

NAME: HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SIZE: A1 CASE CODE: 00779 DRAWING NO: 146488

SCALE: 4:1 SHEET 1 OF 2 REV: A2

△ ₆	101.19 [3.984]	99.06 [3.900]	39	80	9-146488-0
△ ₆	98.65 [3.884]	96.52 [3.800]	38	78	8-146488-9
△ ₆	96.11 [3.784]	93.98 [3.700]	37	76	8-146488-8
△ ₆	93.57 [3.684]	91.44 [3.600]	36	74	8-146488-7
△ ₆	91.03 [3.584]	88.90 [3.500]	35	72	8-146488-6
△ ₆	88.49 [3.484]	86.36 [3.400]	34	70	8-146488-5
△ ₆	85.95 [3.384]	83.82 [3.300]	33	68	8-146488-4
△ ₆	83.41 [3.284]	81.28 [3.200]	32	66	8-146488-3
△ ₆	80.87 [3.184]	78.74 [3.100]	31	64	8-146488-2
△ ₆	78.33 [3.084]	76.20 [3.000]	30	62	8-146488-1
△ ₆	75.79 [2.984]	73.66 [2.900]	29	60	8-146488-0
△ ₆	73.25 [2.884]	71.12 [2.800]	28	58	7-146488-9
△ ₆	70.71 [2.784]	68.58 [2.700]	27	56	7-146488-8
△ ₆	68.17 [2.684]	66.04 [2.600]	26	54	7-146488-7
△ ₆	65.63 [2.584]	63.50 [2.500]	25	52	7-146488-6
△ ₆	63.09 [2.484]	58.42 [2.400]	24	50	7-146488-5
△ ₆	60.55 [2.384]	58.42 [2.300]	23	48	7-146488-4
△ ₆	58.01 [2.284]	55.88 [2.200]	22	46	7-146488-3
△ ₆	55.47 [2.184]	53.34 [2.100]	21	44	7-146488-2
△ ₆	52.93 [2.084]	50.80 [2.000]	20	42	7-146488-1
△ ₆	50.39 [1.984]	48.26 [1.900]	19	40	7-146488-0
△ ₆	47.85 [1.884]	45.72 [1.800]	18	38	6-146488-9
△ ₆	45.31 [1.784]	43.18 [1.700]	17	36	6-146488-8
△ ₆	42.77 [1.684]	40.64 [1.600]	16	34	6-146488-7
△ ₆	40.23 [1.584]	38.10 [1.500]	15	32	6-146488-6
△ ₆	37.69 [1.484]	35.56 [1.400]	14	30	6-146488-5
△ ₆	35.15 [1.384]	33.02 [1.300]	13	28	6-146488-4
△ ₆	32.61 [1.284]	30.48 [1.200]	12	26	6-146488-3
△ ₆	30.07 [1.184]	27.94 [1.100]	11	24	6-146488-2
△ ₆	27.53 [1.084]	25.40 [1.000]	10	22	6-146488-1
△ ₆	24.99 [.984]	22.86 [.900]	9	20	6-146488-0
△ ₆	22.45 [.884]	20.32 [.800]	8	18	5-146488-9
△ ₆	19.91 [.784]	17.78 [.700]	7	16	5-146488-8
△ ₆	17.37 [.684]	15.24 [.600]	6	14	5-146488-7
△ ₆	14.83 [.584]	12.70 [.500]	5	12	5-146488-6
△ ₆	12.29 [.484]	10.46 [.400]	4	10	5-146488-5
△ ₆	9.75 [.384]	7.62 [.300]	3	8	5-146488-4
△ ₆	7.21 [.284]	5.08 [.200]	2	6	5-146488-3
△ ₆	4.67 [.084]	2.54 [.100]	1	4	5-146488-2
△ ₆	2.13 [.084]	-	-	2	5-146488-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN T. HOFFMAN 18DEC95	 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK G. DUBNICZKI 18DEC95	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.12[.005] 4 PLC ± 0.012[.0005] ANGLES ±		APVD G. DUBNICZKI 18DEC95	PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL △ ₄	FINISH SEE-TABLE	WEIGHT -	A1 00779 RESTRICTED CUSTOMER	C=146488 SCALE 4:1 SHEET 2 OF 2 REV A2