



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剝(Strip)	外剝(Roj)	顏色(Color)		外剝(Roj)	內剝(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P紅色 90A+2A Red 鍍鎳	FM-320 (20A 250V-) (IEC 320 C20) 2.0x6.0電腦電源線端子	1	5 <sup>+1</sup> <sub>-0</sub>	20±1	黑/Black(L)	SJT 12AWG/3C  105°C 紅色(Red)  線長: (Length) 1790.7 <sup>+50.8</sup> <sub>-12.7</sub>	20±1	5 <sup>+1</sup> <sub>-0</sub>	黑/Black(L)	35P紅色 90A+2A Red 鍍鎳	FM-319 (20A 250V-) (IEC 320 C19) 母插端子	1
Nickel-Plated 鍍鎳	(Computer power cord terminal) 2.0x5.0電腦電源線端子	1	5 <sup>+1</sup> <sub>-0</sub>	20±1	白/White(N)		20±1	5 <sup>+1</sup> <sub>-0</sub>	白/White(N)	(Nickel-Plated)	(Receptacle Terminals)	3
Nickel-Plated 鍍鎳	(Computer power cord terminals) FM-320兩件式內模	2	5 <sup>+1</sup> <sub>-0</sub>	20±1	綠/Green(E)		20±1	5 <sup>+1</sup> <sub>-0</sub>	綠/Green(E)	黑色(Black)	FM-319兩件式內模 (FM-319 Inner Body)	1
黑色(Black)	FM-320兩件式內模 (FM-320 Inner Body)	1										

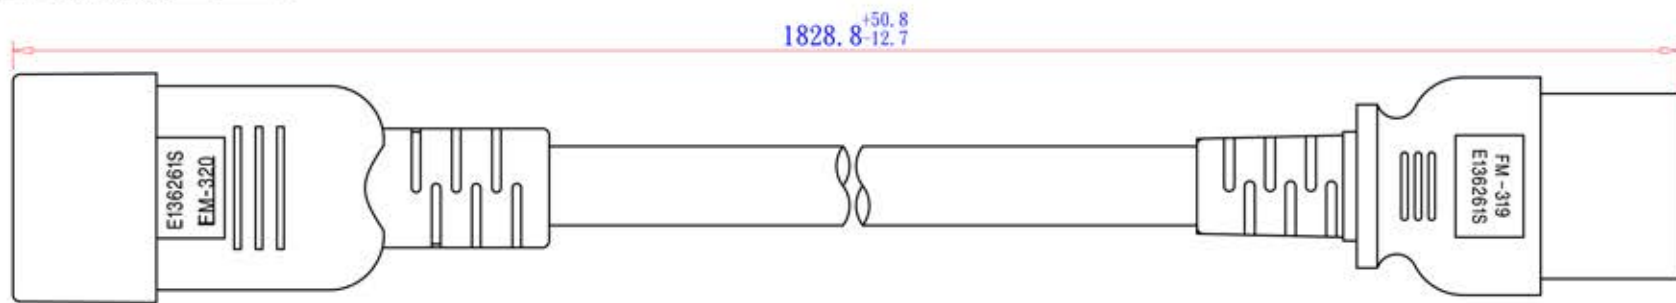

綠/Green(E)

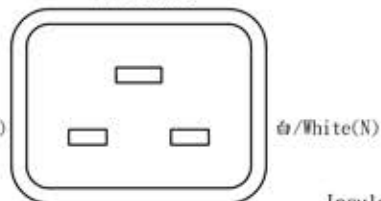


插頭端面圖  
(Dimensions of Plug Face)

Insulation Thickness 0.76 mm  
Overall Diameter 4.00±0.15 mm


Copper Conductor  
65/0.254±0.004 mm  
Resistance 5.58  
(20°C Max). ohms/km)

Jacket Thickness 1.14 mm  
Overall Diameter 11.0±0.20 mm



線材截面圖  
(Wire Cross-Section)

綠/Green(E)

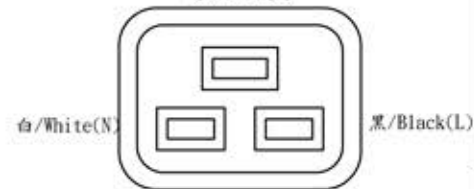

插頭端面圖  
(Dimensions of Plug Face)

## 包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	UL Detachable Label

正例事項 (Carton Print)	依客户要求印刷 (See Purchase Order)	I. 高壓測試:1500V/1Sec <1mA (Hi-Pot Test:1500v/1Sec <1mA)
------------------------	---------------------------------	--

電線印字內容 Wire Printed	使用克實線材 四印字 (Un-Filler, Gravure)	紙箱唛頭標記 Shipping Mark
V E322763 (UL) SJT 12AWG(3.31mm <sup>2</sup> )x3C VW-1 105°C 300V J/ET c(UL) SJT 12AWG(3.31mm <sup>2</sup> )x3C FT2 105°C 300V -LF- (UL) SJT 12AWG(3.31mm <sup>2</sup> )x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 12AWG(3.31mm <sup>2</sup> )x3C FT2 105°C 300V LL43774 -F- -LF-		◊ CnC ◊

SIGNATURE	NAME	DATE		
APPROVED			2011 11/26	新版發行
M.F.G. CHECKED			00	楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION
DRAWN	楊承正	2011/11/26	PART No.	800-12-32D-RE-0006F
PROJ.	CUSTOMER		DWG No.	

CnC Tech, LLC

Industrial Cable and Connector Technology