



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

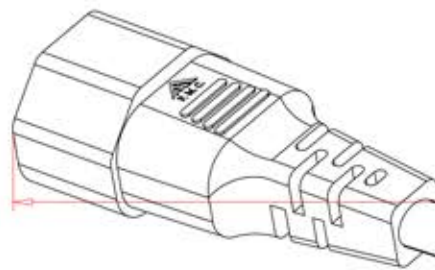
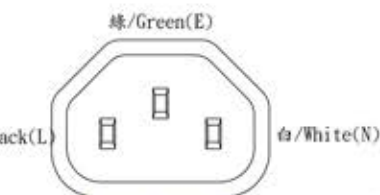
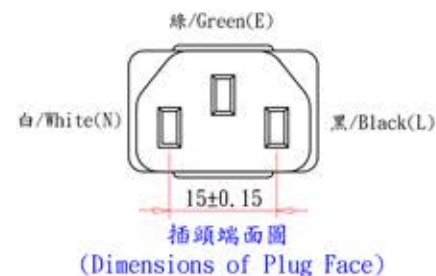
Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剥(Strip)	外剥(Roj)	顏色(Color)		外剥(Roj)	內剥(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P紅色 90A+2A Red 鍍線	FM-7 (15A 250V-) (IEC 320 C14) 電腦電源線端子	1	5 ⁺¹ ₋₀	13±1	黑/Black(L)	SJT 14AWG/3C 105°C 紅色(Red) 線長: (Length) 571.5 ^{+50.8} _{-12.7}	16±1	5 ⁺¹ ₋₀	黑/Black(L)	35P紅色 90A+2A Red 銅本色 (Copper)	ME-302 (15A 250V-) (IEC 320 C13) 電腦電源線端子	1
Nickel-Plated 鍍線	Computer power cord terminals	3	5 ⁺¹ ₋₀	13±1	白/White(N)		16±1	5 ⁺¹ ₋₀	白/White(N)		Computer power cord terminals	3
黑色(Black)	FM-7零件式內模 (FM-7 Inner Body)	1	5 ⁺¹ ₋₀	15±1	綠/Green(E)		16±1	5 ⁺¹ ₋₀	綠/Green(E)	白色(White)	ME-302零件式內模 (ME-302 Inner Body)	1


609.6^{+50.8}_{-12.7}

插頭端面圖
(Dimensions of Plug Face)

Insulation Thickness 0.76 mm
Overall Diameter 3.45±0.10 mm

Copper Conductor
41/0.254±0.004 mm
Resistance 8.88
(20°C (Max). ohms/km)

Jacket Thickness 0.76 mm
Overall Diameter 9.3±0.15 mm



線材截面圖
(Wire Cross-Section)

包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	UL Detachable Label
正例事項 (Carton Print)	依客戶要求印刷 (See Purchase Order)
電線印字內容 Wire Printed	使用克實 線材 四印字 (Un-Filler, Gravure)
V E322763 (UL) SJT 14AWG(2.08mm²)x3C VW-1 105°C 300V J/ET c(UL) SJT 14AWG(2.08mm²)x3C FT2 105°C 300V -LF- (UL) SJT 14AWG(2.08mm²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 14AWG(2.08mm²)x3C FT2 105°C 300V LL43774 -F- -LF-	紙箱印字標記 Shipping Mark
	CnC

I. 高壓測試:1500V/1Sec <0.5mA
(Hi-Pot Test:1500v/1Sec <0.5mA)

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	

SIGNATURE	NAME	DATE		
APPROVED			2011/11/25	新版發行
M.F.G. CHECKED			00	楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION
DRAWN	楊承正	2011/11/25	PART No.	800-14-12D-RE-0002F
CUSTOMER		DWG No.		

CnC Tech, LLC

Industrial Cable and Connector Technology