



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



插頭部件 (Plug Component)			頭部削皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部削皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內削(Strip)	外削(Roj)	顏色(Color)		外削(Roj)	內削(Strip)	顏色(Color)	零件描述(Component)	顏色(Color)	數量(Q'ty)
35P透明 90±2A Clear	FM-2 (13A 125V~) (NEMA5-15P)	1	10±1	60±2	黑/Black(L)	SJT 16AWG/3C	15±1	5 <sub>-0</sub> <sup>+1</sup>	黑/Black(L)	ME-302 (13A 125V~) (IEC 320 C13)	35P透明 90±2A Clear	1
鍍鎳 Nickel-Plated	□4.75 U型圓管 □4.75 Grounding	1	10±1	60±2	白/White(N)	105°C 灰色(Gray)	15±1	5 <sub>-0</sub> <sup>+1</sup>	白/White(N)	電腦電源線端子 (Computer power cord terminals)	銅本色(Copper)	3
鍍鎳 Nickel-Plated	6.3*1.5 單片圓頭端子 (Solid Blades)	2	20±1	75±2	綠/Green(E)	線長: (Length) 1854.2 <sup>+50.8</sup> <sub>-12.7</sub>	15±1	5 <sub>-0</sub> <sup>+1</sup>	綠/Green(E)	302兩件式內模 (302 Inner Body)	白色(White)	1
鍍鎳 Nickel-Plated	墊片 (Gasket)	3										

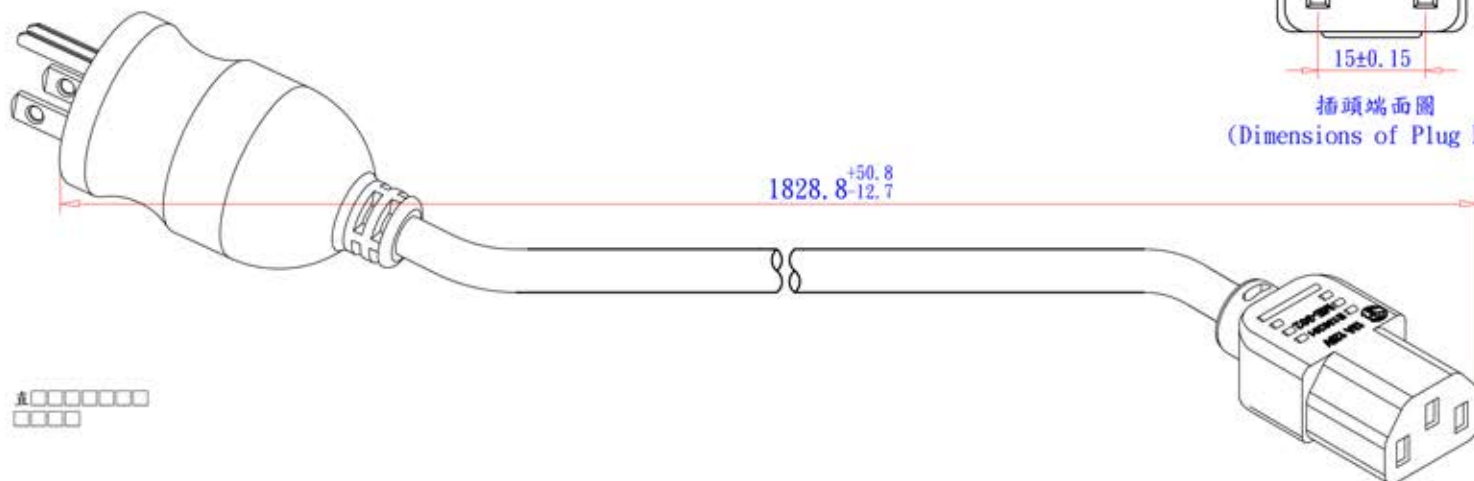

插頭端面圖  
(Dimensions of Plug Face)




插頭端面圖  
(Dimensions of Plug Face)

Insulation Thickness 0.76 mm  
Overall Diameter 3.05±0.10 mm

Copper Conductor  
26/0.254±0.004 mm  
Resistance 14.1  
(20°C Max). ohms/km )

Jacket Thickness 0.76mm  
Overall Diameter 8.5±0.15mm



線材截面圖  
(Wire Cross-Section)

#### 包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	UL Detachable Label

正例事項 (Carton Print)	依客户要求印刷 (See Purchase Order)	1. 高壓測試:1500V/1Sec <1mA (Hi-Pot Test:1500v/1Sec <1mA)
------------------------	---------------------------------	--

電線印字內容 Wire Printed	使用克實 線材 凹印字 (Un-Filler, Gravure)	紙箱等標碼 Shipping Mark
V E322763 (UL) SJT 16AWG(1.31mm <sup>2</sup> )x3C VW-1 105°C 300V /FT c(UL) SJT 16AWG(1.31mm <sup>2</sup> )x3C FT2 105°C 300V -LF-		◊CnC◊
(UL) SJT 16AWG(1.31mm <sup>2</sup> )x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 16AWG(1.31mm <sup>2</sup> )x3C FT2 105°C 300V LL43774 -F- -LF-		

SIGNATURE	NAME	DATE			
APPROVED					
M.F.G. CHECKED			2011 1128	新版發行	楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION	SYMBOL
DRAWN	楊承正	2011/11/28	PART No.	800-16-00D-GR-0006F	
CUSTOMER			DWG No.		
<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology					

SIZE :	A4
UNIT :	mm
SCALE :	1:1
PROJ. :	