



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us






Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styles)		尾部剝皮尺寸 (Dimensions)			尾插部件 (Connector Component)		
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SVT 18AWGx3C		外剝(R.O.J)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	Qty.	顏色(Color)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 ⁺¹ ₋₀	22 ± 2	黑/Black(L)	105°C 黑色 (BLACK)		16 ± 1	5 ⁺¹ ₋₀	黑/Black(L)	FM-302L (IEC 60320, C13)	1	35P 黑色 (Black)
鍍鎳 (Nickel-Plated)	φ4.75 圓管端子 (Earth Pins Terminal)	1	6 ⁺¹ ₋₀	22 ± 2	白/White(N)	Length : 2000±50 (79"±2")		16 ± 1	5 ⁺¹ ₋₀	白/White(N)	2.0*4.0 方管端子 (2.0*4.0 Receptacle Terminal)	3	銅本色 (Brass-Natural)
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 ⁺¹ ₋₀	22 ± 2	綠/Green(E)			16 ± 1	5 ⁺¹ ₋₀	綠/Green(E)	GA005-5 兩件式內模 (2.0*4.0 Serial Housing)	1	米白色 (Off-White)
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1											

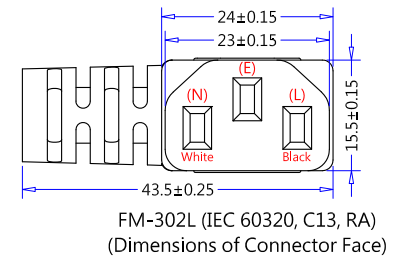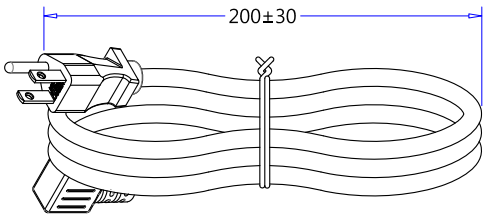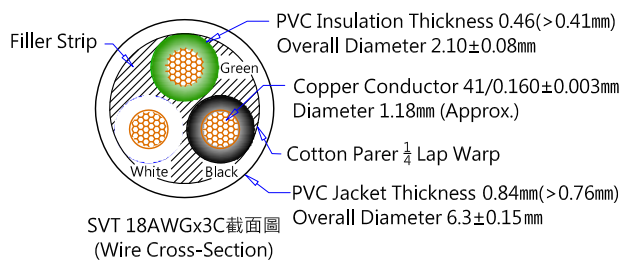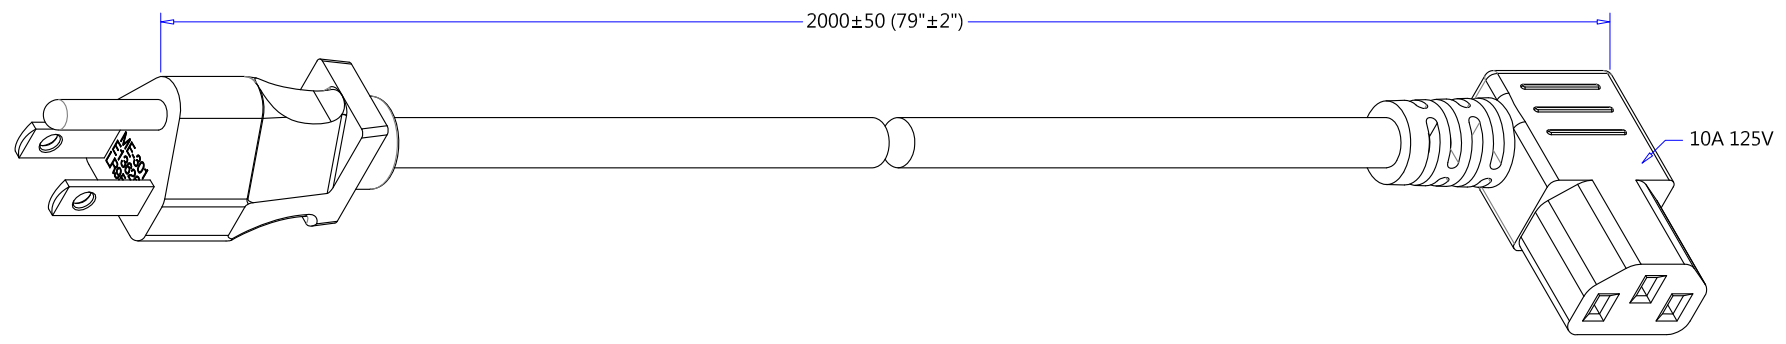

REV	DATE	REVISE CONTENT	NOTE:
A	08/29-2012	The first edition is issued and drawing.	1. Hi-Pot Test : 1500V/1Sec ; <0.5mA. 2. Insulation Resistance Test : DC 500/min>100 meg-ohm. 3. Continuity & Polarization Test : No short circuit, break circuit, displacement. 4. Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening. 5. Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening. 6. All material according to Non-toxic standard.(Material must be RoHS compliant.) 7. "FMC" logo maybe present on C13.

線材印字 (Wire Printed)		充麻, 油墨印字 (Fillers, Printing Ink)		CnC Tech, LLC Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN					
Tied Hank	See Hank Detail	Chu8.		CnC			
Carton Size	480 x 320 x 180	DATE		P/N No.			
Pack Number	75pcs/ UL Laster Labels	08/29-2012		800-18-1-2-SVT0-BL-00200			
Carton Print	See Purchase Order	TYPE		MATERIAL			
		NEMA 5-15P to IEC 60320 C13 Right Angle Power Supply Cord		PVC			
		DRAWING NO.		UNIT			
		098MM978		mm			
		REV		Customer Approval			
		A					

業務校閱：
品質校閱：