



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

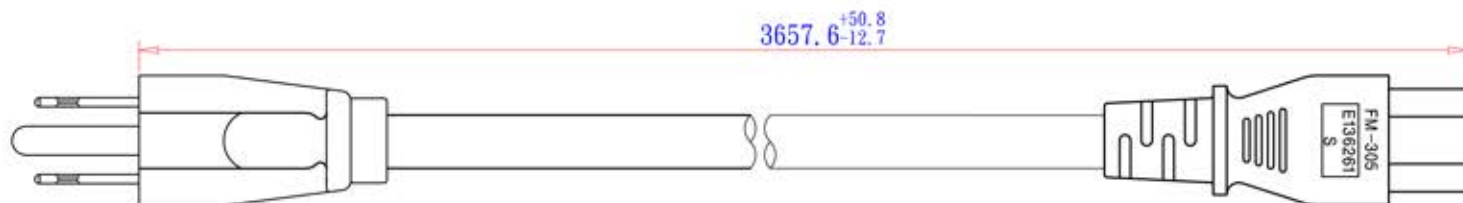


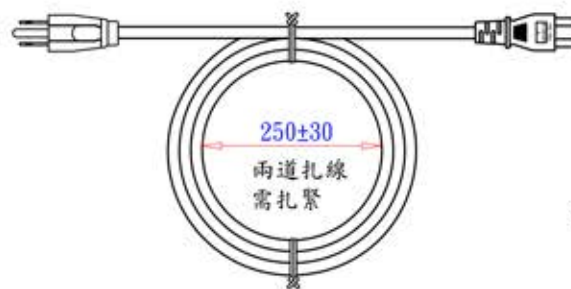
Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剥(Strip)	外剥(Roj)	顏色(Color)	SVT 18AWG/3C  105°C 黑色(Black)  線長: (Length) 3657.6 <sup>+50.8</sup> <sub>-12.7</sub>	外剥(Roj)	內剥(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P黑色 90A±2A Black	ME-301 (10A 125V~) (NEMA 5-15P) 鍍鎳 Ø4.75 圓管端子 (Earth Pin Terminal)	1	5 <sup>+1</sup> <sub>-0</sub>	23±1	黑/Black(L)		22±1	5 <sup>+1</sup> <sub>-0</sub>	黑/Black(L)	35P黑色 90A±2A Black	FM-305 (10A 125V~) (IEC 320 C5) 0型端子 (0-Type terminals)	1
Nickel-Plated 鍍鎳	6.3*1.5 單片圓頭端子 (Solid Blades)	1	5 <sup>+1</sup> <sub>-0</sub>	23±1	白/White(N)		22±1	5 <sup>+1</sup> <sub>-0</sub>	白/White(N)	銅本色 (Copper)	FM-305兩件式內模 (FM-305 Inner Body)	3
Nickel-Plated 鍍鎳	301單件式內模 (301 Inner Body)	2	5 <sup>+1</sup> <sub>-0</sub>	23±1	綠/Green(E)		22±1	5 <sup>+1</sup> <sub>-0</sub>	綠/Green(E)	白色(White)		1
白色(White)		1										

Earth Ground (Green)  
Ø4.75±0.15插頭端面圖  
(Dimensions of Plug Face)Insulation Thickness 0.38 mm  
Overall Diameter 2.0±0.10 mmCopper Conductor  
41/0.160±0.004 mm  
Resistance 22.4  
(20°C (Max). ohms/km)Jacket Thickness 0.76 mm  
Overall Diameter 6.3±0.15 mm線材截面圖  
(Wire Cross-Section)

A-C2 扎線圖示 (A-C2 Hank Detail)

綠/Green(E)

插頭端面圖  
(Dimensions of Plug Face)

## 包裝方式(Packing)

扎線方式 (Bulk Pack)	依繞線圖示繞線 See Hank Detail(A-C2)
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	Detachable Label
正側唛頭 (Carton Print)	依客戶要求印刷 (See Purchase Order)
電線印字內容 Wire Printed	使用充實線材 四印字 (Un-Filler, Gravure)
V E322763 (UL) SVT 18AWG(0.824mm <sup>2</sup> )x3C VW-1 105°C 300V /FT c(UL) SVT 18AWG(0.824mm <sup>2</sup> )x3C FT2 105°C 300V -LF- (UL) SVT 18AWG(0.824mm <sup>2</sup> )x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SVT 18AWG(0.824mm <sup>2</sup> )x3C FT2 105°C 300V LL43774 -F- -LF-	紙箱唛頭標碼 Shipping Mark
	◊ CnC ◊

1. 高壓測試:1500V/1Sec <3mA  
(Hi-Pot Test:1500v/1Sec <3mA)

SIGNATURE	NAME	DATE		
APPROVED			2012	
M.F.G. CHECKED			00/0419	新版發行
Q.A. CHECKED			REV DATE	DESCRIPTION
DRAWN	楊承正	2012/04/19	PART No.	800-18-39B-BL-0012F
PROJ.	CUSTOMER		DWG No.	
<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology				