



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剝皮尺寸 (Dimensions)			端子規格 (Termianl Style)	
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SVT 18AWGx3C (Shielded, A+E)	外剝(ROJ)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 <sup>+1</sup> <sub>-0</sub>	22 ± 2	黑/Black(L)	105°C 黑色 (Black) Length : 3000±50 (118"±2")	50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	φ4.75 圓管端子 (Earth Pins Terminal)	1	6 <sup>+1</sup> <sub>-0</sub>	22 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 <sup>+1</sup> <sub>-0</sub>	22 ± 2	綠/Green(E)		50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1									

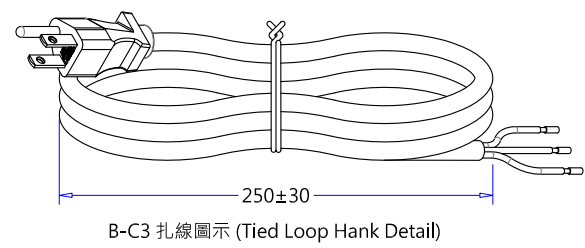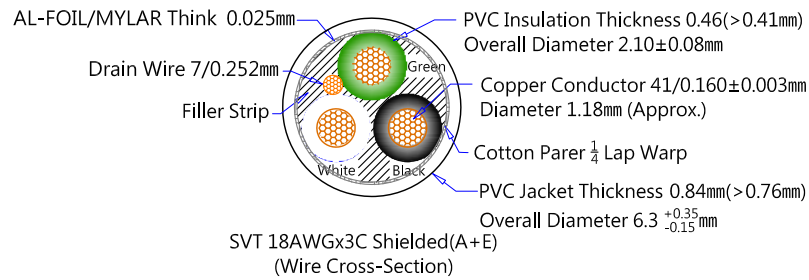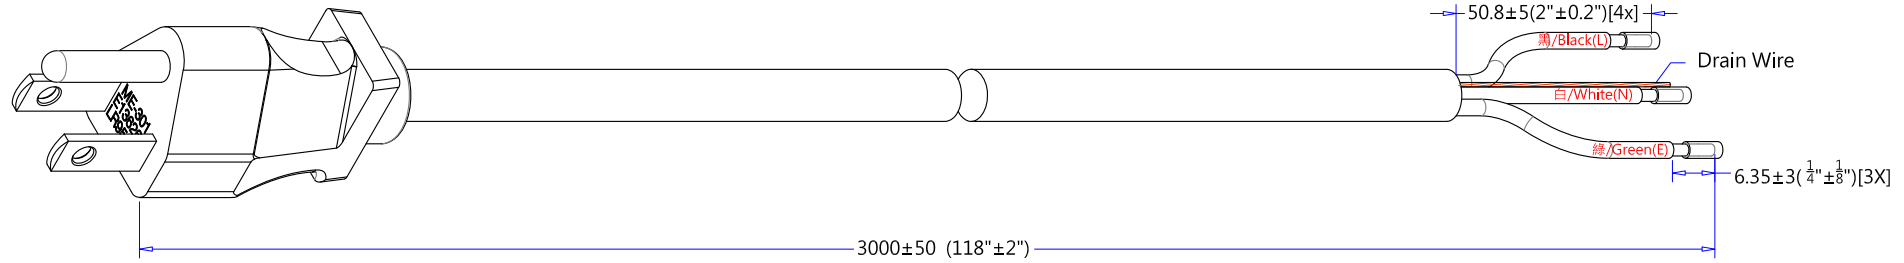

REV	DATE	REVISE CONTENT
A	08/30-2012	The first edition is issued and drawing.
F		

**NOTE:**  
 1. Hi-Pot Test : 1500V/1Sec ; <0.5mA.  
 2. Insulation Resistance Test : DC 500/min>100 meg-ohm.  
 3. Continuity & Polarization Test : No short circuit, break circuit, displacement.  
 4. Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.  
 5. Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.  
 6. All material according to Non-toxic standard.(Material must be RoHS compliant.)

線材印字 (Wire Printed)		充麻, 油墨印字 (Fillers, Printing Ink)		<b>CnC Tech, LLC</b>			
包裝方式 (Packing)				Industrial Cable and Connector Technology			
Tied Hank	See Hank Detail	DRAWN		CUSTOMER		CnC	
Carton Size	480 x 320 x 180	Chu8.		P/N No.		800-1801-2-SVT0-BL-00300	
Pack Number	50 pcs/ UL Laster Labels	DATE		MATERIAL		PVC	UNIT
Carton Print	See Purchase Order	08/30-2012		mm			
TYPE	NEMA 5-15P to ROJ (S&R)Power Supply Cord			Customer Approval			
DRAWING NO.	098MM1004	REV	A				

業務校閱： 品質校閱：