



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styles)	尾部剝皮尺寸 (Dimensions)			端子規格 (Terminal Style)	
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	分線(Split)	顏色(Color)	SPT-1 18AWGx2C 105°C 黑色(Black) Length : 1828.8±50 (72"±2")	分線(Split)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-101A (1-15P, Polarized)	1	6 ⁺¹ ₋₀	15 ± 2	圓邊 (L) (Smooth)		50.8±5	6.35±3	圓邊 (L) (Smooth)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	(8.0/6.3) 極性端子97662-1 (Polarized Solid Blades)	2	6 ⁺¹ ₋₀	15 ± 2	毛邊 (N) (Ribbed)		50.8±5	6.35±3	毛邊 (N) (Ribbed)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	

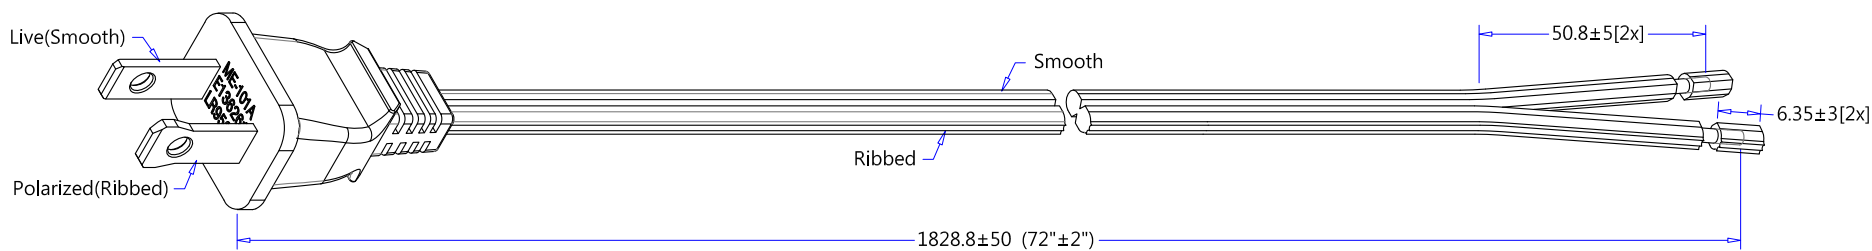

ME-101A (NEMA 1-15P)
(Dimensions of Plug Face)

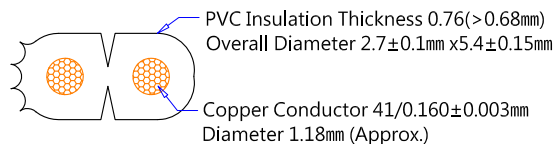

SPT-1 18AWGx2C截面圖
(Wire Cross-Section)

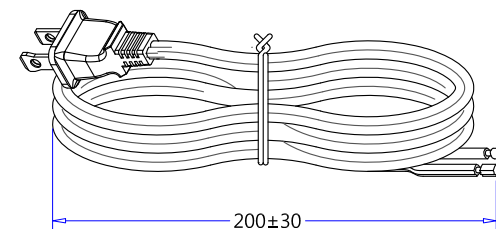

B-C2 扎線圖示 (Tied Loop Hank Detail)

REV	DATE	REVISE CONTENT
A	08/30-2012	The first edition is issued and drawing.
F		

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
 - Insulation Resistance Test : DC 500/min>100 meg-ohm.
 - Continuity & Polarization Test : No short circuit, break circuit, displacement.
 - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
 - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
 - All material according to Non-toxic standard.(Material must be RoHS compliant.)
 - "FMC" logo maybe present on 1-15P.

線材印字 (Wire Printed)		充實, 油墨印字 (Un-Fillers, Printing Ink)		CnC Tech, LLC Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN <i>Chu8.</i>					
Tied Hank	See Hank Detail	DATE 08/30-2012		CUSTOMER	CnC		
Carton Size	480 x 320 x 150			P/N No.	800-1808-2-SPT1-BL-0006F		
Pack Number	125pcs/ <small>UL Laster Labels</small>	TYPE NEMA 1-15P Polarized to R.O.J(S&R) Power Supply Cord		MATERIAL	PVC	UNIT	mm
Carton Print	See Purchase Order			Customer Approval			
DRAWING NO.	098MM1009	REV	A				

業務校閱：
品質校閱：