



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**DK-SERIES
DKR 35 24VUC 1A**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

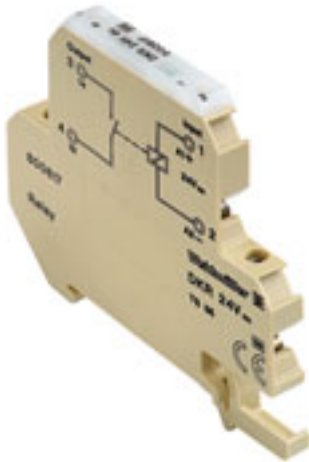

At just 6 mm wide, all components of the DKR minicouplers have an extremely narrow design. Weidmüller also offers 4 and 5 screw-connections, with a rated cross-section of 4 mm². The mini-coupler is suitable for a wide range of applications. It is used for the coupling of digital sensor/actuator signals with automation devices on the process level..

General ordering data

Order No.	8016610000
Part designation	DKR 35 24VUC 1A
Version	DK-SERIES, Relays, No. of contacts: 1, NO contact, Rated control voltage: 24 V UC ±10 %, Screw connection
GTIN (EAN)	4008190132804
Qty.	10 pc(s).

DK-SERIES DKR 35 24VUC 1A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data

Dimensions

Length	77 mm	Width	6 mm
Height	62 mm		

Temperature

Ambient temperature (operational)	-25 °C...+40 °C	Storage temperature	-40 °C...+60 °C
-----------------------------------	-----------------	---------------------	-----------------

Input

Rated voltage	150 V	Rated control voltage	24 V UC ±10 %
Response / drop-out voltage AC coil	12 V / 8 V	Pull-in (sparkover) / drop-out voltage DC coil	10 V / 11 V
Rated current AC	15 mA	Rated current DC	9 mA
Pull-in / drop-out current, AC coil	6.3 mA / 4.3 mA	Pull-in / drop-out current, DC coil	3.8 mA // 3mA
Power rating	0.36 VA / 216 mW	Status indicator	Green LED

Output

Continuous current	0.5 A	Max. switching current	500 A
Max. switching frequency at rated load	5 Hz	Sparkover time / Drop-out time	typ. 0.7...2.5 ms / 0.2...2 ms
Switch-off delay	typical. 0.2...2.0 ms	Switch-on delay	typically 0.7...2.5 ms
Switching voltage AC, max.	100 V	making current	500 mA
max. switching capacity	10 W / 10 VA	min. switching capacity	1 V / 1 mA

Contact data

Contact design	NO contact	No. of contacts	1
Contact material	Rh/Ru	Mechanical service life	10 ⁹ switching cycles

Rated data

Conductor connection system	Screw connection	DIN Rail compatibility	TS 35
Humidity	40°C / 93% rel. humidity, no condensation		

Insulation coordination (EN 50 178)

Clearance and creepage distances for control/load side	≥ 3 mm	Dielectric strength to mounting rail	4 kV _{eff}
Impulse withstand voltage	1.5 kV	Overvoltage category	III
Pollution severity	2	Protection class	IP 20
Protective separation acc. to VDE 0106 part 101	No	Rated voltage	150 V

Other technical data

Free-wheel diode	No	Reverse polarity protection	not available
Status indicator	Green LED	Version	Relay coupler

Approvals

Approvals institutes	GOSTME25; CE
----------------------	--------------

Datasheet**DK-SERIES
DKR 35 24VUC 1A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data**Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01

Notes

Note, technical data	End plate AP DKT4 PA 0687560000
----------------------	------------------------------------

**DK-SERIES
DKR 35 24VUC 1A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings**Electric symbol**