

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










## PLUGBORD tm


## PRINTED CIRCUIT PROTOTYPING BOARDS FOR D-SUBMINATURE CONNECTORS

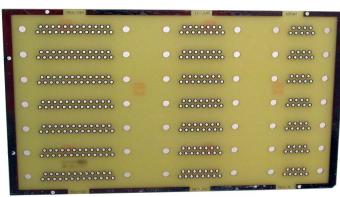

Standard Density 25, 15, 9-Pin 8025

## Features:

- Standard or high density patterns
- · Press-fit Pad-Per-Hole, Holes Plated-Thru
- All Copper Circuit Patterns are Solder Coated
- FR-4 Epoxy Glass UL 94V-) Flame Rating
- Boards Can Be Cut to Smaller Units

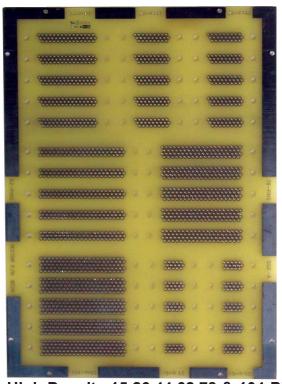

High Density 15,26,44,62,78 & 104-Pin 8026

These .062" (1.57MM) Thick printed circuit boards feature SOLDER-COATED .039" (99MM) diameter holes. 3U and 6U Eurocard board dimensions will plug into VectorPak DIN-based subracks (ordered separately).

ORDERING INFORMATION:				
Part Nr.	WXL	Circui Solder Side	t Pattern Component Side	Material
8025	3.94" x 6.3"	Pads/Plated Holes	Pads/Plated Holes	FR-4
8026	9.19" x 6.3"	Pads/Plated Holes	Pads/Plated Holes	FR-4

