

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









5 Nm RC5 33 Watts 33 W Part number made to order



- Torque rating : 5 Nm, for long service life
- Motors : nominal power 27 W
- All-metal high-quality gearboxes, "integrated" geared motors
- Base speed range: 7.4 to 426 rpm
- UL approved

Part number	

	Type	Type	Voltage	Standard speed (rpm)	Output speed (rpm)	Ratios (i)
80835016	33 W	808350	-	-	29,4	61,25

Specifications

General characteristics

General Characteristics	
Motor	828300
Gearbox	810350
Maximum permitted torque from gearmotor under continuous conditions (Nm)	5
Axial load dynamic (daN)	6
Radial load dynamic (daN)	6
Max. output power (W)	33
Nominal output (W)	27
Gearbox case temperature rise (°C)	50
Weight (g)	1540
Approvals	UL 1004

Made to order products, available on request

- Motors:


 Other supply voltages
 Shaft lengths at front and/or rear
 Built-in interference suppression on 82 830
- Encoders
- Other fixing flanges on front and rear
- "High-power" motors

Gearboxes:

- Special shaft
- Special greasing
- Other reduction ratios

Dimensions (mm)

808350

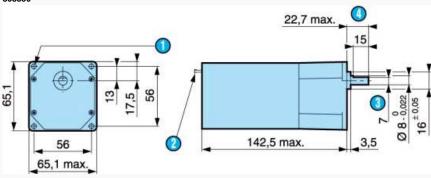


No	Legend	
0	4 fixing holes Ø 4.2	
②	Lead length 200 mm ± 10	
①	7 across flats	
0	Shaft pushed-in	

02/11/2015 www.crouzet.com


Dimensions (mm)





No	Legend
•	Shaft pushed-in

Curves

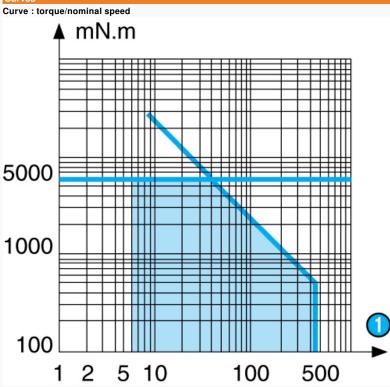

N _o	Legend
•	rpm

Other information

Options

- Ball bearings on gearbox output shaft : part number becomes 808355
- EMC filter
- 48 V, 90 V, 110 V motor
- 1- or 2-channel encoder, 1, 5 or 12 pulses/revolution

Product adaptations

02/11/2015 www.crouzet.com Special supply voltage
Special cable length
Optical or Hall effect encoder
Special connectors
Special shaft
Special reduction ratio
Special materials for gears
Special ball bearings
Special adaptor plate
UL/CSA logo on label
With 828305 - 67 W motors

