



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Sub-bases for intrinsically safe miniature solenoid valves EEx ia II C

LCIE approval
no. 93 C 6014X

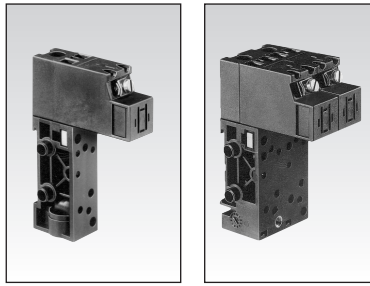

1

Part numbers

Sub-bases for use with :		for tube Ø ext (mm)		
Miniature solenoid valves	intermediate sub-base	4	—	—
81 519...	end bases	4	—	—
Miniature control valves	intermediate sub-base,	4	81 513 075	—
81 513...	width 17.5	6	81 513 076	—
Miniature control valves	intermediate sub-base,	4	—	81 517 106
81 516...	width 35	6	—	81 517 206
Sub-base width	mm		1 sub-base 17.5	1 sub-base 35

Function

Pneumatic and electrical connections	miniature solenoid valves 81 519 034 /035 /334 /335	—	—
	miniature control valves 81 513 100 /200 /600	1 footprint	2 footprints
	miniature control valves 81 516 100 /200	—	1 footprint

Characteristics

Permitted fluids	lubricated (ASTM2) or not	air or inert gases	air or inert gases
Operating pressure	bars	0 to 8	0 to 8
Temperature	operating °C	-10 to +50	-10 to +50
	of fluid °C	-10 to +30	-10 to +30
Sub-base fixing	by clip	—	—
	by end bases	81 513 011	81 513 011
Rail mounting	by rail EN 50022 width 35 mm	●	●
Construction	NBR, PA 66 fireproof, brass	●	●
Integral pressure indicator		—	—
Weight	g	55	105
Degree of protection		IP 20	IP 20

Pneumatic connections


Port 1 function	common supply	—	—
Port 3 function	common exhaust	—	—
Port 2 function	miniature solenoid valve 81519...	—	—
	miniature control valve 81 513 200 /600	output at rest (NO)	output at rest (NO)
Port "2" function	miniature control valve 81 513 200 /600	—	output at rest (NO)
	miniature control valve 81 516...	—	output at rest (NO)
Port 4 function	miniature control valve 81 513 100 /200	output operating (NC)	output operating (NC)
	miniature control valve 81 516...	—	output operating (NC)
Port "4" function	miniature control valve 81 513 100 /200	—	output operating (NC)
Integral push-in fittings (NFE 49100)		●	●

Electrical connections

Integral electrical connections	number	1	2
Screw clamp terminals	clamping capacity : 3 mm ²	number	2 (A1 and A2)

Dimensions

Associable sub-bases for miniature control valves EEx 81 513... and 81 516...

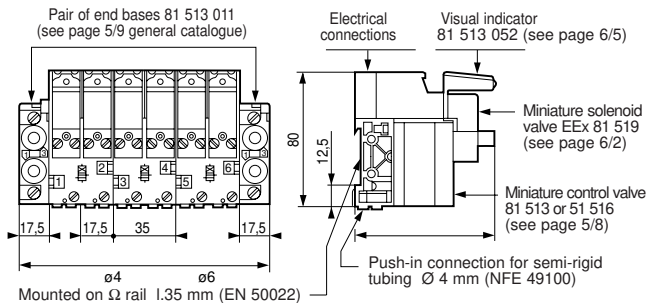

Other information

Note :

Sub-bases **81 513 075 / 076** and **81 517 106 / 206** must be used with end bases **81 513 011** and intermediate module **81 513 001** (if required).

Products and specifications subject to change without notice.

Consult factory for application assistance.

204 Airline Drive, Suite 300, Coppell, Texas 75019 / Tel: (888) 778-2733 / FAX: (888) 329-9773 / www.crouzet-usa.com

6