



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# 3M™ Fibre Optic Connectivity

## FC-Connectors and Couplings

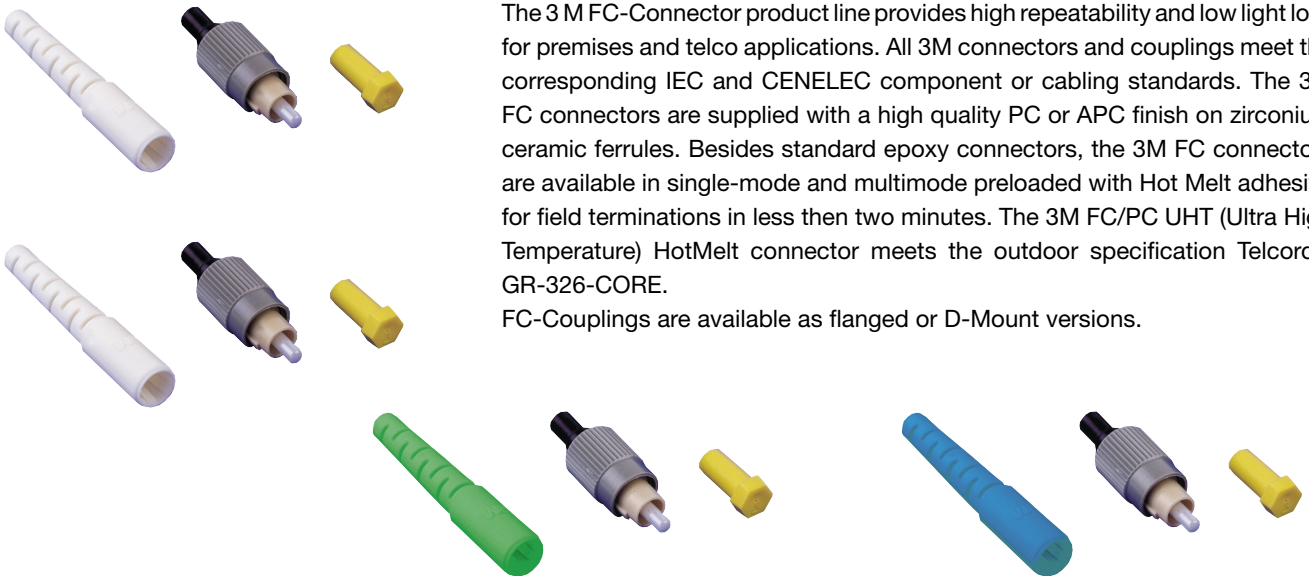

The 3M FC-Connector product line provides high repeatability and low light loss for premises and telco applications. All 3M connectors and couplings meet the corresponding IEC and CENELEC component or cabling standards. The 3M FC connectors are supplied with a high quality PC or APC finish on zirconium ceramic ferrules. Besides standard epoxy connectors, the 3M FC connectors are available in single-mode and multimode preloaded with Hot Melt adhesive for field terminations in less than two minutes. The 3M FC/PC UHT (Ultra High Temperature) HotMelt connector meets the outdoor specification Telcordia GR-326-CORE.

FC-Couplings are available as flanged or D-Mount versions.

---

### Features

#### Epoxy FC Connectors

- According to IEC / CENELEC standards
- Independent ferrule/backbone assembly
- Keyed threaded connector
- High strength thermoplastic housing
- Zirconium ceramic ferrule
- Pre-radiused PC-Finish

#### Hot Melt FC Connectors

- Pre-loaded Hot Melt adhesive versions
- Fast cure time
- No crimping required
- Unlimited adhesive shelf life
- Zirconium ceramic ferrule
- Pre-radiused PC-Finish
- UHT Hotmelt

### Benefits



- Rugged reliable performance
- Excellent pull proof performance
- High repeatability, improved stability
- Eliminates flaking
- High performance over temperature range
- Consistent performance with low reflection
  
- No epoxy to mix, no shelf life, no waste
- Quicker installation, saves time
- Fewer tools, saves time
- Eliminates outdated epoxy inventory
- High performance over temperature range
- Consistent performance with low reflection
- Meets Telcordia GR-326-CORE outdoor specification

# Specifications:

3M™ FC Connectors	Multimode		Singlemode			
Product Number FC/APC	6200	6202	8203 8204	8208	8200	8206
Connector Type	Hot Melt Ceramic	Epoxy Ceramic	Epoxy Ceramic	UHT Hot Melt Ceramic	Hot Melt Ceramic	Epoxy Ceramic
Ferrule hole size (µm) for nominal size 125 µm	125	125	126 127	126	126	126
Insertion Loss (dB) typical field mount (one-mated pair) @ 1300 nm	<0,2	<0,2	<0,3	<0,2	<0,2	<0,2
Reflection (dB) typical field mount	-25	-25	-45	-55	-40	-65
Connecteur durability (dB) change after 200 matings	<0,2	<0,2	<0,2	<0,2	<0,2	<0,2
Operating temperature connector only	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 100° C	-40° to 85° C	-40° to 85° C
Storage temperature	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 100° C	-40° to 80° C	-40° to 85° C
Cable Tension` Straight pull at 90N Side pull at 13	<0,5 dB increase <0,5 dB increase	<0,5 dB increase <0,5 dB increase	<0,5 dB increase <0,5 dB increase	<0,5 dB increase <0,5 dB increase	<0,5 dB increase <0,5 dB increase	<0,5 dB increase <0,5 dB increase
Testing Specifications*	ISO/IEC	ISO/IEC	TelcordialSO/IEC	TelcordialSO/IEC	ISO/IEC	TelcordialSO/IEC
Material Connector ferrule Connector housing Boot	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer
Flame retardancy	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0	UL-94 V-0
Connector indentification ** Backbone Coupling nut Boot**	Beige Black White	Black Black Geige	Black Grey White	Black Grey Blue	Black Grey White	Beige Green Green
Field termination kit*** 230 V	6361	8361	8361	6361	6361	Conversion kit

\* ISO 11801, EN50173, \*\* Note: other boot colours are available, \*\*\*See seperate datasheet fot Termination Kit

3M™ FC Couplings	Multimode		Singlemode	
Product Number	6210	8210	8211	8211 APC
Housing design	Square flanged	Square flanged	D-Mount	D-Mount
Operating temperature	-40° to 85° C	-40° to 85° C	-40° to 85° C	-40° to 85° C
Material Sleeve Housing	Phosphore Bronze Metal	Zirconia Ceramic Metal	Zirconia Ceramic Metal	Zirconia Ceramic Metal

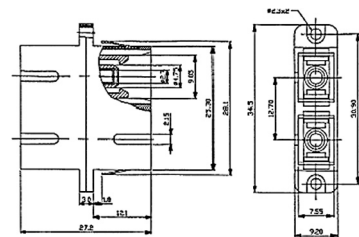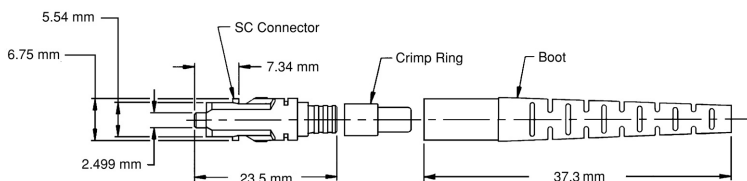

## Ordering information:

<b>FC Connectors</b>						
Ref.-No.	6200	6202	8203 8204	8208	8200	8206 FC/APC
Connector Type	Hot melt Ceramic	Epoxy Ceramic	Epoxy Ceramic	UHT Hot Melt Ceramic	Hot melt Ceramic	Epoxy Ceramic
Packaging	1/pkg. 60/cs	1/pkg. 60/cs	1/pkg. 60/cs	1/pkg. 60/cs	1/pkg. 60/cs	1/pkg. 60/cs
Minimum order*	60 each	60 each	60 each	60 each	60 each	60 each

\* Bulk Packages of 1000 ea are available upon request

<b>FC Couplings</b>				
Ref.-No.	6210	8210	8211	8211 APC
Packaging	1/cd.	1/cd.	1/cd.	1/cd.
Minimum order*	1 each	1 each	1 each	1 each

### *3M is trademark of 3M Company*

#### **Important Notice**

3M does not accept responsibility or liability, direct or consequential arising from reliance upon any information provided and the user should determine the suitability of the products for their intended use. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence. All questions of liability relating to 3M products are governed by the seller's terms of sale subject where applicable to the prevailing law.

If any goods supplied or processed by or on behalf of 3M prove on inspection to be defective in material or workmanship, 3M will (at its option) replace the same or refund to the Buyer the price of the goods or services. Except as set out above, all warranties and conditions, whether express or implied, statutory or otherwise are excluded to the fullest extent permissible at law.



#### **3M Telecommunications**

Europe, Middle East & North Africa  
c/o Quante AG

Carl-Schurz-Staffe 1 • 41453 Neuss • Germany

Tel: ++49 (0)2131 / 14-5999

Fax: ++49 (0)2131 / 14-5998

Internet: [www.3MTelecommunications.com](http://www.3MTelecommunications.com)