



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SOLDERLESS TERMINALS


SPECIFICATIONS: Terminals: EPT Copper Insulation: Vinyl

## RING TONGUE NON-INSULATED




CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL I.D.
8200		6	.25 (6.4)	.60 (15.2)	.47 (11.9)		
8201	22/18	8	.33 (8.4)	.70 (17.8)	.54 (13.7)	.030 (.76)	.070 (1.78)
8202		10	.33 (8.4)	.70 (17.8)	.54 (13.7)		
8203		6	.25 (6.4)	.60 (15.2)	.47 (11.9)		
8204	16/14	8	.33 (8.4)	.70 (17.8)	.54 (13.7)	.030 (.76)	.090 (2.29)
8205		10	.33 (8.4)	.70 (17.8)	.54 (13.7)		
8206		6	.28 (7.1)	.68 (17.3)	.54 (13.7)		
8207	12/10	8	.38 (9.7)	.73 (18.5)	.54 (13.7)	.040 (1.02)	.135 (3.4)
8208		10	.38 (9.7)	.73 (18.5)	.54 (13.7)		

## RING TONGUE INSULATED



CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL .250 (6.4) LONG I.D.	MAX. INSUL. DIA.
8209		6	.25 (6.4)	.80 (20.3)	.67 (17.0)			
8210	22/18 (Red)	8	.33 (8.4)	.90 (22.9)	.74 (18.8)	.030 (.76)	.070 (1.78)	.145 (3.7)
8211		10	.33 (8.4)	.90 (22.9)	.74 (18.8)			
8212		6	.25 (6.4)	.80 (20.3)	.67 (17.0)			
8213	16/14 (Blue)	8	.33 (8.4)	.90 (22.9)	.74 (18.8)	.030 (.76)	.090 (2.29)	.170 (4.3)
8214		10	.33 (8.4)	.90 (22.9)	.74 (18.8)			
8215		6	.28 (7.1)	.98 (24.9)	.84 (21.3)			
8216	12/10 (Yellow)	8	.38 (9.7)	1.03 (26.2)	.84 (21.3)	.040 (1.02)	.135 (3.4)	.250 (6.4)
8217		10	.38 (9.7)	1.03 (26.2)	.84 (21.3)			


## BLOCK SPADE NON-INSULATED



Flanged

CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL I.D.	FLANGED CAT. NO.
8218		6						8236
8219	22/18	8	.30 (.76)	.65 (16.5)	.50 (12.7)	.030 (.76)	.090 (2.29)	8237
8220		10						8238
8221		6						8239
8222	16/14	8	.30 (.76)	.65 (16.5)	.50 (12.7)	.030 (.76)	.090 (2.29)	8240
8223		10						8241
8224		6						8242
8225	12/10	8	.32 (8.1)	.73 (18.5)	.54 (13.7)	.040 (1.02)	.135 (3.4)	8243
8226		10						8244


## BLOCK SPADE INSULATED



Flanged



CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL .250 (6.4) LONG I.D.	MAX. INSUL. DIA.	FLANGED CAT. NO.
8227		6							8245
8228	22/18 (Red)	8	.30 (.76)	.85 (21.6)	.70 (17.8)	.030 (.76)	.070 (1.78)	.145 (3.7)	8246
8229		10							8247
8230		6							8248
8231	16/14 (Blue)	8	.30 (.76)	.85 (21.6)	.70 (17.8)	.030 (.76)	.090 (2.29)	.175 (4.4)	8249
8232		10							8250
8233		6							8251
8234	12/10 (Yellow)	8	.32 (8.1)	1.03 (26.2)	.84 (21.3)	.040 (1.02)	.135 (3.4)	.255 (6.5)	8252
—		10							8253

## SNAP SPADE NON-INSULATED




CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL I.D.
8254		6	.25 (6.4)				
8255	22/18	8	.30 (7.6)	.68 (17.3)	.50 (12.7)	.030 (.76)	.070 (1.78)
8256		10	.32 (8.1)				
8257		6	.25 (6.4)				
8258	16/14	8	.30 (7.6)	.68 (17.3)	.50 (12.7)	.030 (.76)	.090 (2.29)
8259		10	.32 (8.1)				
8260		6	.28 (7.3)				
8261	12/10	8	.32 (8.1)	.73 (18.5)	.53 (13.6)	.040 (1.02)	.135 (3.4)
8262		10	.32 (8.1)				

## SNAP SPADE INSULATED



CAT. NO.	WIRE RANGE (AWG)	FOR STUD SIZE	W	L	E	MATL THICK	BARREL .250 (6.4) LONG I.D.	MAX. INSUL. DIA.
8263		6	.25 (6.4)					
8264	22/18 (Red)	8	.30 (7.6)	.88 (22.4)	.70 (17.8)	.030 (.76)	.070 (1.78)	.145 (3.7)
8265		10	.32 (8.1)					
8266		6	.25 (6.4)					
8267	16/14 (Blue)	8	.30 (7.6)	.88 (22.4)	.70 (17.8)	.030 (.76)	.090 (2.29)	.170 (4.3)
8268		10	.32 (8.1)					
8269		6	.28 (7.3)					
8270	12/10 (Yellow)	8	.32 (8.1)	1.03 (26.2)	.83 (21.2)	.040 (1.02)	.135 (3.4)	.250 (6.4)
8271		10	.32 (8.1)					

## HAND CRIMP TOOL

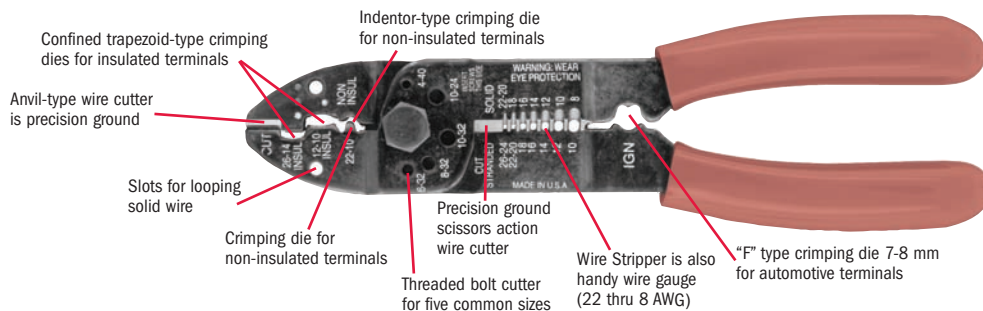

CAT. NO. 1345

Tel (718) 956-8900 • Fax (718) 956-9040  
(800) 221-5510 • kec@keyelco.com

**KEYSTONE**  
RoHS COMPLIANT ~ ISO 9001 CERTIFIED

www.keyelco.com

31-07 20th Road - Astoria, NY 11105-2017

SOLDERLESS TERMINALS