



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV. Status

AC-DC UL/CSA ADAPTOR DC 9V 1200mA

REVISION -
02/21/92 YN

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
 2. Output voltage and current: DC 9V at 1200mA

REVISION A
TEMECULA
WAS CARSON
UPDATED FORMAT
6/9/95 DS

V _{in}	100% Load	120mA Load
108	7.1 VDC MIN	-
120	8.4-9.6 VDC	13.4 VDC MAX
132	-	15.0 VDC MAX

REVISION B
ADDED REF...
MATING CONN.
04/02/96 DS

NOTE: Specification applies after 10 minutes warm-up with 1200mA load and at any operating temperature.

REVISION C
REFORMATTED
REVISED TITLE
ADDED NAMEPLATE
09/12/96 DS



3. Operating temperature: 0 ° C to +40 ° C
4. Storage temperature: -20 ° C to +85 ° C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output

B. Typical performance data test Condition:
T_a= +25 °C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies


UL File No. E82180
UL approved as a battery charger
CSA File No. LR38236

D. Nameplate: Information is as follows:
Metallic letters on a black background

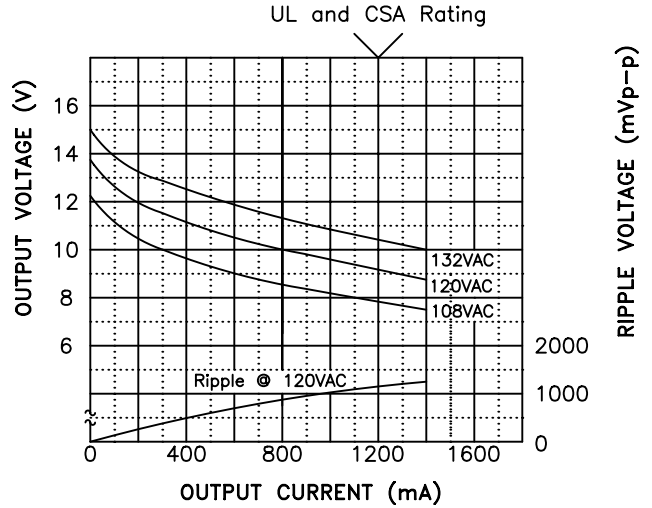

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

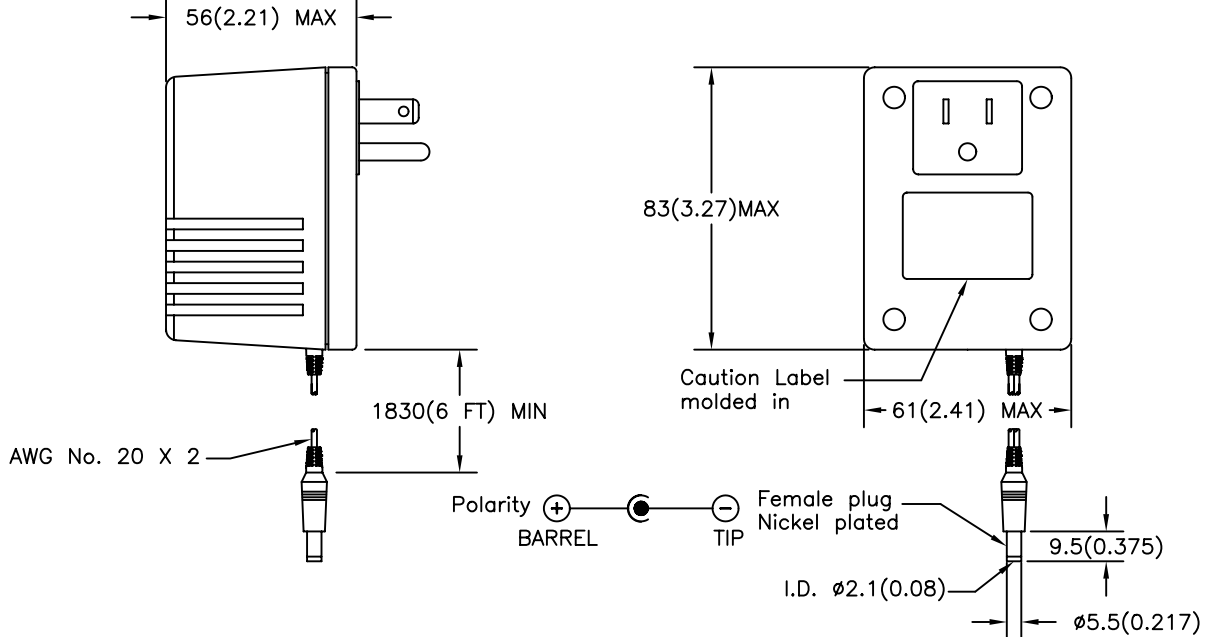

REFERENCE: MATING CONNECTOR 722A SWITCHCRAFT HEC0470-01-230 HOSHIDEN

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DRAWING CONTROL NO.	REV	MODEL DESCRIPTION	MODEL SPECIFICATION
P-A7-00047 ACAD\PS\A7000471.DWG	C	UL/CSA DC 9V 1200mA POWER SUPPLY	825A4620G
<p>CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE</p> <p>TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482</p>			<p>DIM: mm(In) SCL: NONE SH: 1 OF 1</p>
<p>PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.</p>			