



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

82A0121


TITLE TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT, FLEXIBLE

Date 04-12-02

Revision F

This specification sheet forms a part of the latest issue of Raychem Specification 80.

COMPONENT WIRES - 82A0111

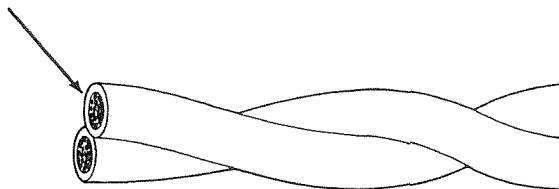

CABLE CONSTRUCTION DETAILS				
PART NUMBER	CONDUCTOR SIZE (AWG)	OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
		NOMINAL	MAXIMUM	
82A0121-28-*	28	.058	.064	2.1
82A0121-26-*	26	.066	.072	2.9
82A0121-24-*	24	.074	.080	4.3
82A0121-22-*	22	.086	.092	5.9
82A0121-20-*	20	.106	.114	8.6
82A0121-18-*	18	.128	.136	13.7
82A0121-16-*	16	.158	.166	20.8
82A0121-14-*	14	.198	.208	33.7
82A0121-12-*	12	.242	.254	50.6
82A0121-10-*	10	.314	.332	86.1
82A0121-8-*	8	.390	.410	135.1
82A0121-6-*	6	.472	.494	208.1

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 inch (maximum)

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators with slashes separating the component wire colors.

Example: AWG 20, white and black component wires:
82A0121-20-9/0

NOTE: Nominal values are for information only.
Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.