



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING


82A1111

TITLE RADIATION-CROSSLINKED, MODIFIED, FLUOROPOLYMER-INSULATED, ONE CONDUCTOR CABLE, SHIELDED, JACKETED, LIGHTWEIGHT, FLEXIBLE

Date 12-2-91

Revision C

This specification sheet forms a part of the latest issue of Raychem Specification 80.

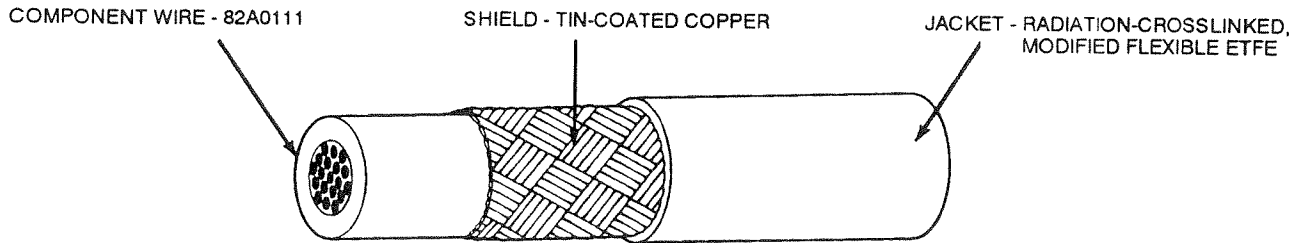

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
82A1111-28-*	28	38	.005	.007	.060	.065	4.0
82A1111-26-*	26	38	.005	.007	.064	.069	4.7
82A1111-24-*	24	38	.005	.007	.068	.073	5.7
82A1111-22-*	22	38	.005	.007	.074	.079	6.9
82A1111-20-*	20	38	.005	.007	.084	.089	8.9
82A1111-18-*	18	38	.006	.008	.097	.102	12.5
82A1111-16-*	16	38	.006	.008	.112	.118	17.1
82A1111-14-*	14	38	.007	.009	.134	.141	25.3
82A1111-12-*	12	38	.008	.010	.158	.166	35.8
82A1111-10-*	10	38	.008	.011	.196	.206	56.7
82A1111- 8-*	8	38	.009	.012	.236	.248	84.7
82A1111- 6-*	6	38	.011	.014	.281	.295	126.
82A1111- 4-*	4	36	.013	.017	.373	.392	208.
82A1111- 2-*	2	36	.014	.019	.444	.466	302.
82A1111- 1-*	1	34	.016	.021	.513	.539	385.
82A1111- 0-*	0	34	.018	.024	.590	.620	491.
82A1111-00-*	00	34	.020	.026	.644	.676	597.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

* BLOCKING: 150 ± 3°C

CROSSLINKING PROOF TEST: 300 ± 3°C for 7 hours

15 in. specimen with sufficient weight to keep straight

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

* FLAMMABILITY: Procedure 1, 3 seconds (maximum); 3 in. (maximum)

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 100% (minimum)

Tensile Strength, 3000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1500 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

* LIFE CYCLE: 200 ± 3°C for 168 hours

* LOW TEMPERATURE-COLD BEND: -65 ± 3°C

* SECANT MODULUS: 4.0 X 10⁴ lbf/in² (maximum), 2 % strain, 2 in. Jaw separation, 0.2 in. / minute, procedural reference ASTM D 882

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER

The *** in the part number above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.

Example: AWG 20, white component wire;

white jacket: 82A1111-20-9-9

* Qualification Test

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
(415) 361 3333 TWX 910 373 1728