



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





LINEAR WALL PLUG ADAPTOR 24VAC 750mA

REV. Status

REVISION - 11/29/01 RJ
REVISION A CHANGED A.6 AND DIMS. 04/01/02 RJ
REVISION B REVISED PLUG LOCATION. ADDED RoHS 05/30/06 MP
REVISION C ADDED NOTE 7 UPDATED LABEL AND SAFETY 06/22/07 MP

A. Electrical specifications

- Rated Input voltage: AC 120V 60Hz
- Output voltage and current: AC 24V at 750mA

V_{in}	100% Load
108	19.0VAC MIN
120	23.5-24.5VAC
132	-

No Load
-
28.0VAC MAX
31.0VAC MAX



NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.


- Operating temperature: -10°C to +30°C
- Storage temperature: -20°C to +85°C
- Operating and Storage Humidity: 0 to 95% without condensation
- Withstand voltage: 1240Vrms @ input to output
- Does not meet CEC (California Energy Commission) regulations.

B. Typical performance data test Condition:
Ta= +25°C measured after 10 minute warm-up with input at 120V 60Hz


C. Safety:

Certified to UL1310 and CSA No. 223
File No. E218172

D. Nameplate: Information is as follows:
Metallic letters on a black background




TYPICAL PERFORMANCE CHART

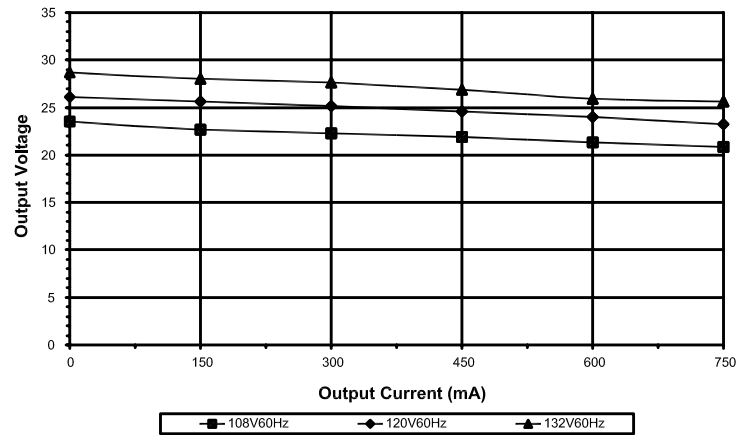

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

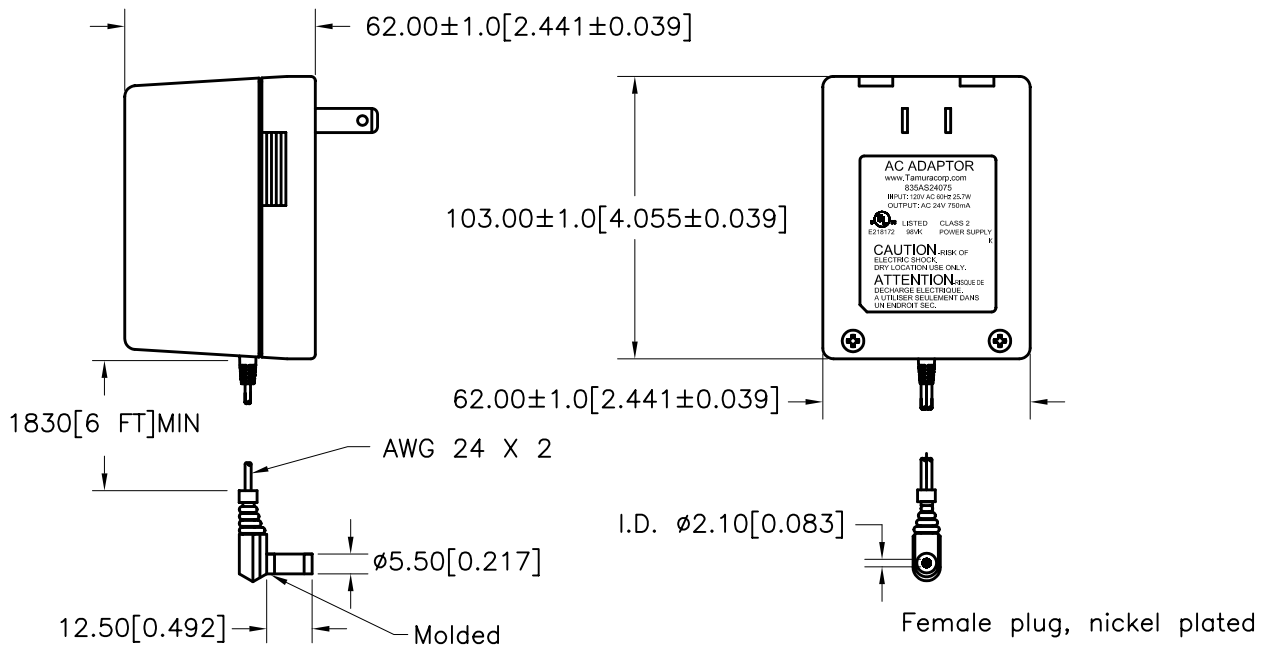

PREPARED BY:

L. MONTOYA

ENGINEER:

M. PITCHAI

SAFETY ENGINEER:

B. OCONNELL

APPROVED:

Y. SEKIGUCHI

DWG CONTROL NO. P-A7-12958
ACAD\PS\A7129581.DWG

REV C

24VAC 750mA
LINEAR WALL PLUG ADAPTOR
TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

835AS24075
MODEL SPECIFICATION
DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.