



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Din Rail Mount 17.5 mm Phase Sequence & Phase Failure EMWS Part number 84903020



- Control of 3-phase networks : phase sequence, total phase failure
- Multi-voltage from 3 x 208 to 3 x 480 V AC
- Controls its own supply voltage
- True RMS measurement
- LED status indication

Part numbers

Type	Function	Nominal voltage (V)	Output
84903020 EMWS	Phase sequence, phase failure	3 x 208 → 3 x 480 V AC	1 single pole changeover relay

Specifications

Supply

AC supply voltage frequency	50 / 60 Hz ± 10 %
Galvanic isolation of power supply/measurement	No
Immunity from micro power cuts	60 ms

Inputs and measuring circuit

Frequency of measured signal	50 → 60 Hz ± 10 %
------------------------------	-------------------

Output

Type of contacts	No cadmium
Max. breaking current	EMWS - MWS2 : 5 A AC/DC MWS : 8 A AC 250 V AC - 8 A DC 30 V DC
Maximum rate	360 operations/hour at full load
Operating categories acc. to IEC/EN 60947-5-1	AC12, AC13, AC14, AC15, DC12, DC13

Insulation

Insulation coordination (IEC/EN 60664-1)	Overvoltage category III : degree of pollution 3
Rated impulse withstand voltage (IEC/EN 60664-1)	4 kV (1,2 / 50 μs)
Dielectric strength (IEC/EN 60664-1)	2 kV AC 50 Hz 1 min.

General characteristics

Display relay	Yellow LED
Casing	17,5 mm
Mounting	On 35 mm symmetrical DIN rail, IEC/EN 60715
Mounting position	All positions
Material : enclosure plastic type VO to UL94 standard	Incandescent wire test according to IEC/EN 60695-2-11
Protection (IEC/EN 60529)	Terminal block : IP20 Casing : IP30
Operating temperature IEC/EN 60068-2	-20 → +50 °C
Storage temperature IEC/EN 60068-2	-40 → +70 °C
Humidity IEC/EN 60068-2-30	2 x 24 hr cycle 95 % RH max. without condensation 55 °C
Vibrations according to IEC/EN 60068-2-6	10 → 150 Hz, A = 0.035 mm
Shocks IEC/EN 60068-2-6	5 g

Standards

Product standard	IEC/EN 50178
Electromagnetic compatibility (EMC)	IEC/EN 61000-6-1, IEC/EN 61000-6-2, IEC/EN 61000-6-3, IEC/EN 61000-6-4
Certifications	MWS, MWS2 : CE, UL, CSA EMWS : CE, UL (cULus)
Conformity with environmental directives	RoHS

Supply

Supply voltage Un	3 x 208 → 3 x 480 VAC *
Voltage supply tolerance	-13 % / +10 %
Operating range	183 → 528 VAC
Maximum power consumption	20 VA

Inputs and measuring circuit

Measurement ranges	183 → 528 VAC
Guaranteed phase failure detection threshold	< 100 VAC
Voltage threshold hysteresis	> 80 VAC (voltage must be > 180 VAC)

Display precision	± 10 V
Maximum regeneration (phase failure)	< 100 VAC

Timing

Alarm on delay time max.	100 ms
Delay on pick-up	100 ms

Output


Type of output	1 single pole changeover relay
Maximum breaking voltage	250 VAC/DC
Max. breaking current	NO : 5A 250 VAC / 5 A 30 VDC NC : 3A 250 VAC / 3 A 30 VDC
Min. breaking current	10 mA / 12 VDC
Breaking capacity (V resistive)	NO : 1,250 VA / 150 W NC : 750 VA / 90 W
Mechanical life (operations)	10^5 cycles NO $7 \cdot 10^4$ cycles NC

Insulation

Nominal insulation voltage	300 V (correspond à un réseau 277/480 avec neutre ou 480 sans neutre)
Insulation resistance (IEC/EN 60664-1)	> 500 M Ω / 250 VDC / 1min

General characteristics

"Fault" indication	Yellow LED turns off
Weight	63 g 72 g with unitary packing & manual operation
Connecting capacity IEC/EN 60947-1	Rigid : 1 x 0,5 → 4 mm ² (AWG 20 → AWG 11) 2 x 0,5 → 2,5 mm ² (AWG 20 → AWG 14) Flexible with ferrules : 1 x 0,5 → 2,5 mm ² (AWG 20 → AWG 14) 2 x 0,5 → 1,5 mm ² (AWG 20 → AWG 16)
Max. tightening torques IEC/EN 60947-1	0,6 → 0,8 N.m / 5,3 → 7,08 Lbf.in
Vibrations according to IEC/EN60068-2-6	10 → 150 Hz, A = 0.35 mm peak to peak 20 x cycles, 1octave / min

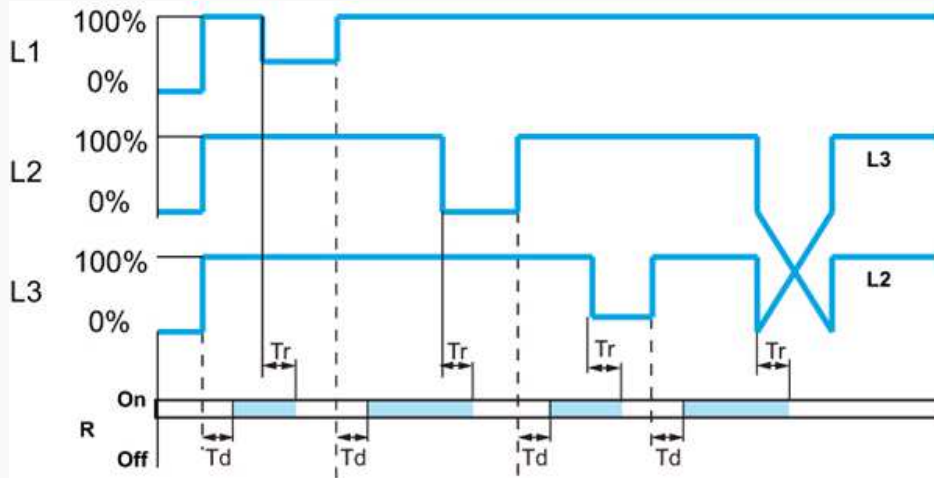Comments**Principles****Operating principle****EMWS : Phase controller**

The relay monitors its own supply voltage.

The relay controls :

- correct sequencing of the three phases,
- total failure of one of the three phases.

When the phase sequence and voltages are correct (> 183 VAC), the output relay is closed and the yellow LED is lit.

In the event of a phase sequence or total phase failure fault (detected when one of the voltages drops below 100 V), the relay opens instantly and its LED is extinguished.


When the unit is powered up with a measured fault, the relay stays open.

Td : Power on delay

Tr : Response time after a fault has occurred


R : output relay

Dimensions (mm)**EMWS**

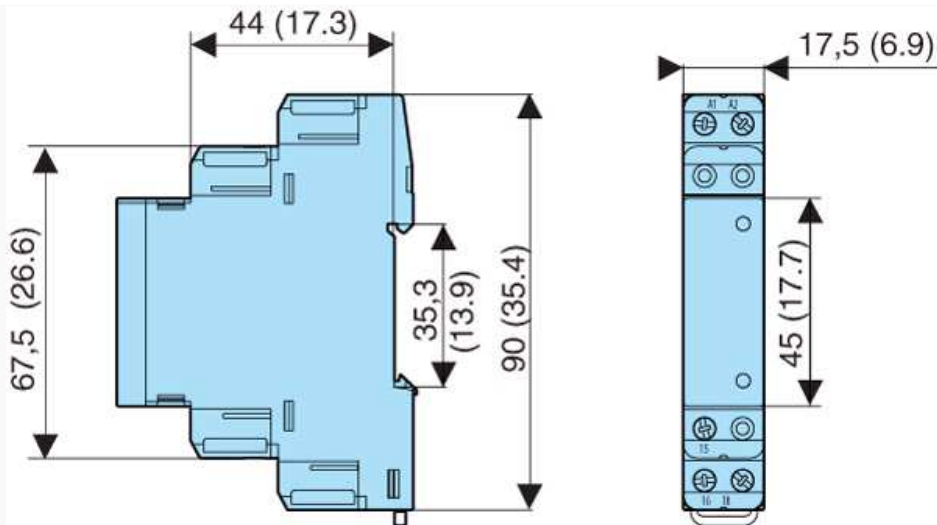

Connections


EMWS

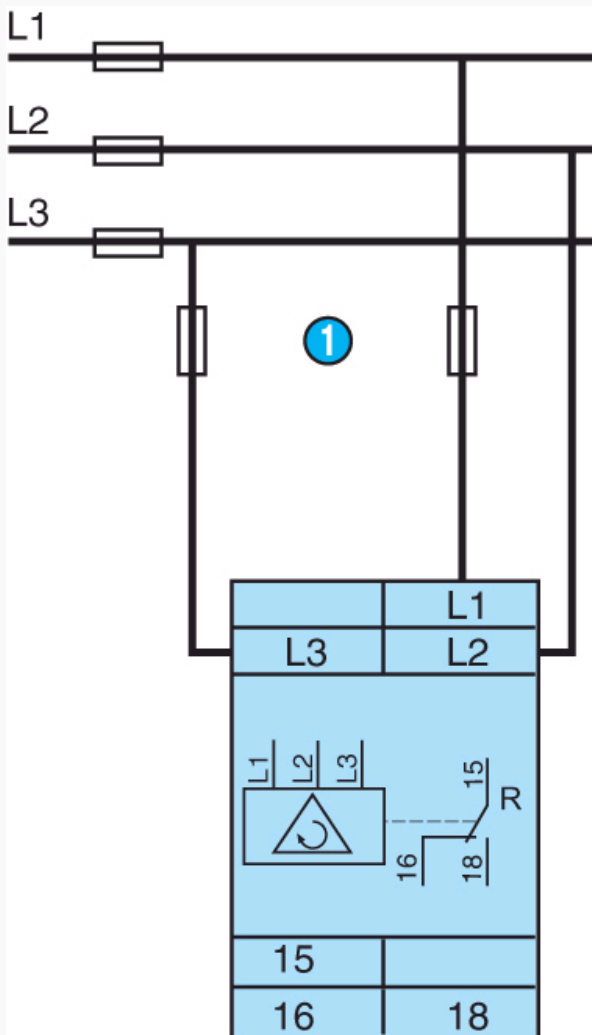

N°	Legend
①	2 x F1 100 mA fast-blow fuse

Connections

CA 84903020

 CA 84903020

Product adaptations



- Customisable colours and labels