



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES 84B
Backlit with Self
Adhesive Legends


FEATURES

- Backlit for Low Light Applications
- Waterproof Silicone Rubber
- Audible, Tactile Contacts
- Low Contact Resistance
- Optional RFI/EMI Shielding
- 3,000,000 Operations per Button




Keyboards and Keypads

DIMENSIONS In inches (and millimeters)

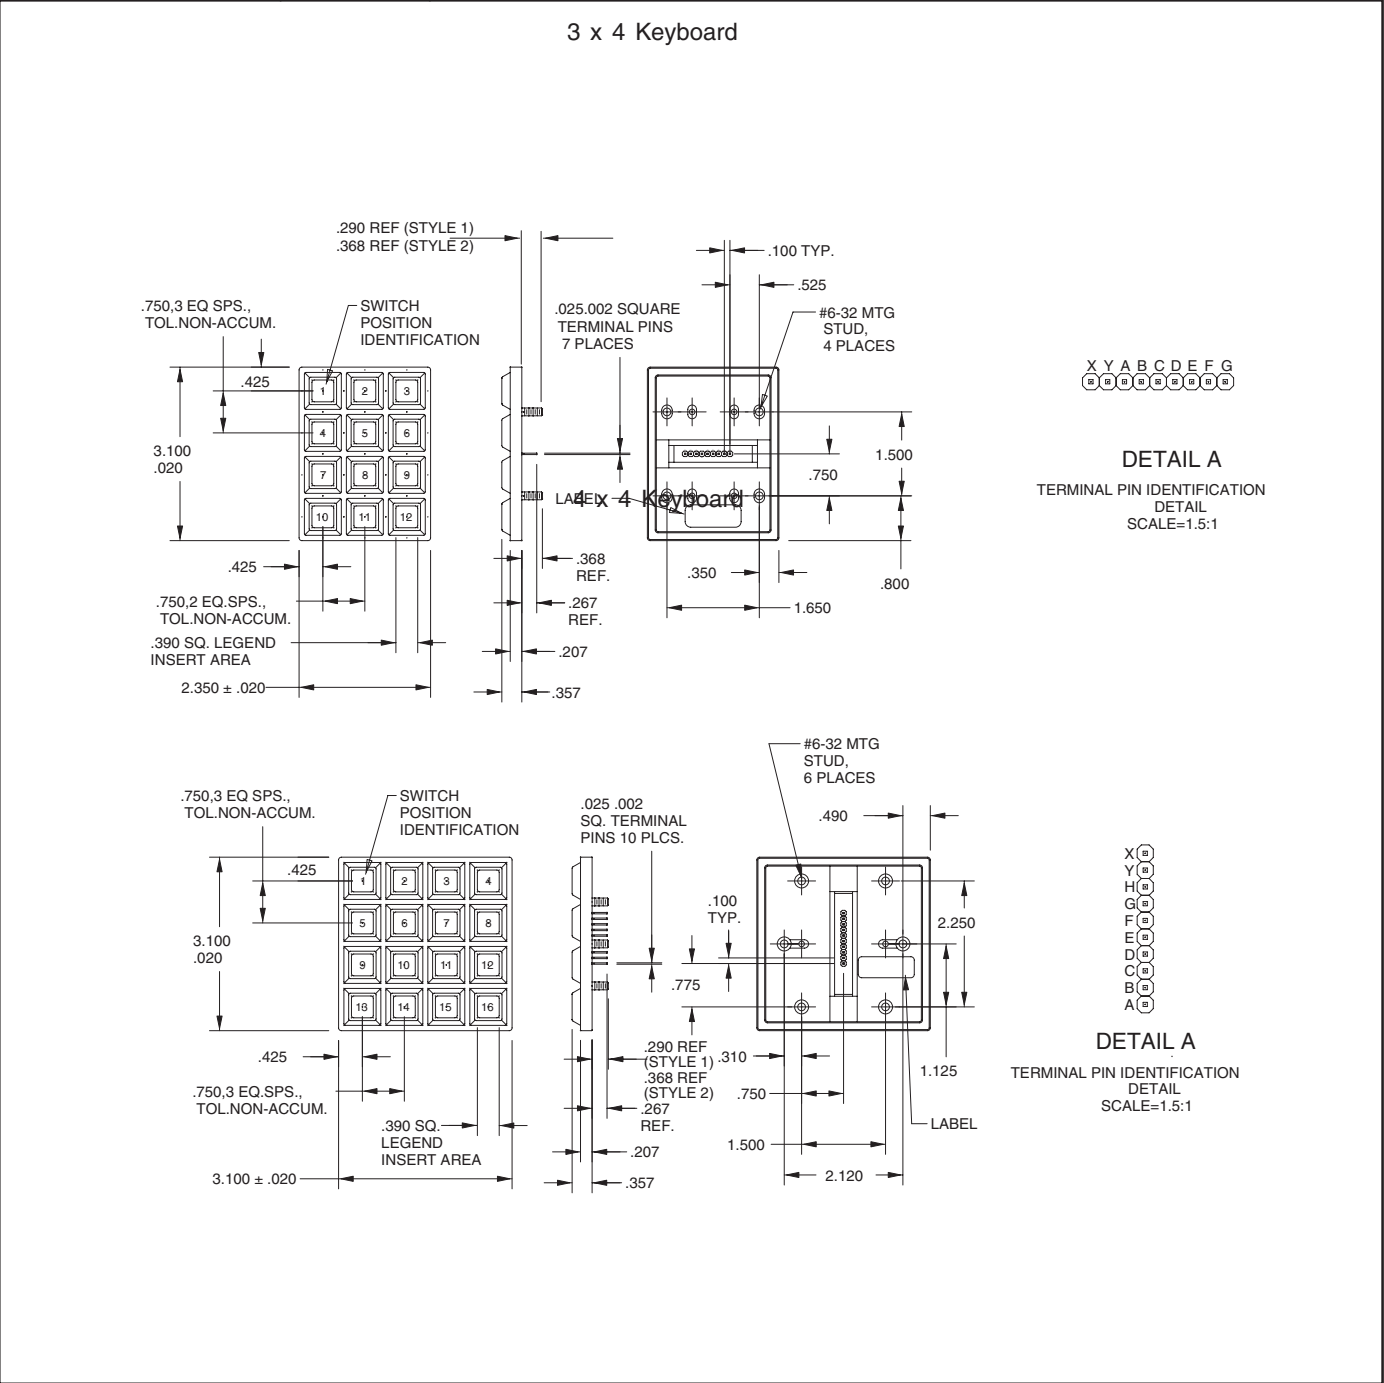

SCHEMATIC AND TRUTH TABLE

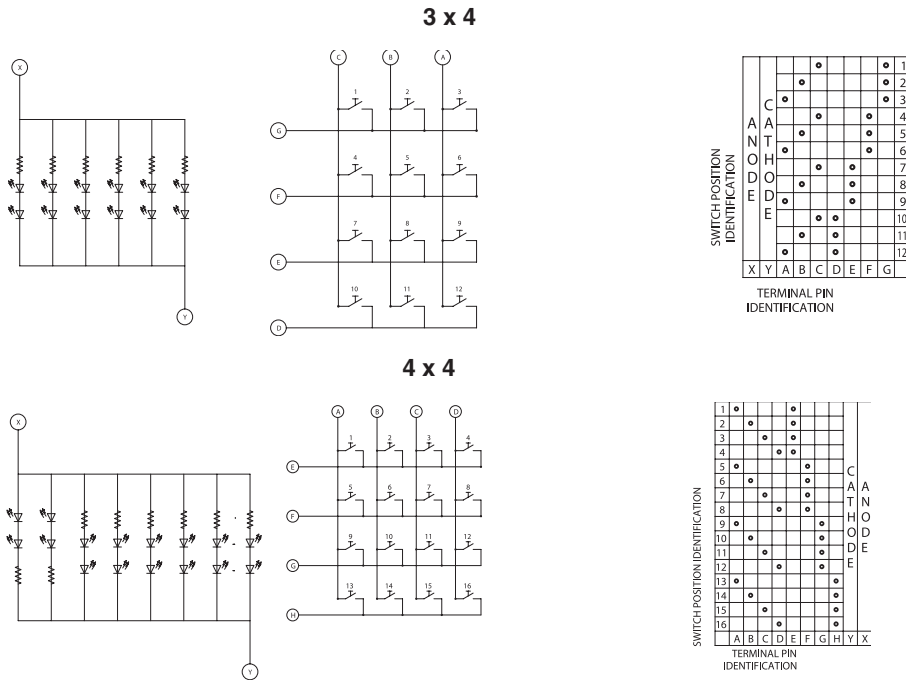

LED Color	Forward Voltage			Resistor (OHMS)	Typ. Current Consumption (With 5V Pwr. Supply)	
	Min.	Typ.	Max.		3 x 4	4 x 4
Red	-	1.95	2.40	43	155mA	205mA
Yellow/Green	-	1.95	2.40	43	155mA	205mA
Green	1.50	-	2.40	43	155mA	205mA
Orange	-	1.95	2.40	43	155mA	205mA

SPECIFICATIONS

Rating Criteria

Rating at 24 Vdc: - 10 milliamps resistive (max.)

Contact Bounce: 4 milliseconds maximum at make; 10 milliseconds, at break

Contact Resistance: 10 ohms maximum

Life Expectancy: 3 million operations/button

Insulation Resistance: >1,000 megohms

Operating Features

Pre-Travel: .030 inches minimum

Operating Force: 20 ± 4 ounces

Humidity: 0 to 98% (no condensation)

Materials and Finishes

Terminal Pins: Copper alloy CDA 725

PC Board: FR-4 glass cloth epoxy

Dome Retainer/Rear Seal Sheet: Polyester

Mounting Studs: Phosphor bronze

Optional Hex Nut: Stainless steel, passivated

Optional EMI Shield: Aluminum foil

Keypad: Silicone rubber

SELF-ADHESIVE LEGEND SHEETS

Each 8.5" x 11" legend sheet contains commonly used symbols, terms, alpha characters and 0-9 in helvetica bold type. Self-adhesive legends are clear urethane on a chrome mylar base. Adhesive is silicone/acrylic. Legends can be purchased in the following ways:

1. Entire legend sheets: Part numbers 84AC5012-1, -2, -3 OR -4.
2. Individual legends: Part numbers 84AC5012-0001, -0002 etc. (Individual legend pins are for groups of 10 legends each)
3. See Grayhill drawing 84AC5012-X for detailed information on available legends, sizes and fonts.

ORDERING INFORMATION

