



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## 2-hand control KZH2-XS Part number 85100626



- Type III C "2-hand control" functions according to EN 574/97
- Control device with two channels
- Level 4 according to NF.EN 954-1
- "KZH2-XS":
  - 2 "N/O" safety contacts with linked contacts-6A/250 V AC
- "KZH3-RS":
  - 3 "N/O" safety contacts with linked contacts-6A/250 V AC
  - "N/F" signalling contact

	Type	Function	Level of safety	Safety contacts	Casing	Supply voltage	Connections	Weight (g)
85100626	KZH2-XS	2-hand control	4	2	22,5 mm	24 V ACDC	Screw terminal	230
85100636	KZH3-RS	2-hand control	4	3	45 mm	24 V ACDC	Screw terminal	310
85100634	KZH3-RS	2-hand control	4	3	45 mm	115 V AC	Screw terminal	410
85100635	KZH3-RS	2-hand control	4	3	45 mm	230 V AC	Screw terminal	410

### Supply voltage

On/off indication	1 power supply voltage LED
-------------------	----------------------------

### Type

Breaking capacity (V resistive)	1500 VA
Max. breaking current	6,82 A
Max. breaking voltage	440 V AC
Electrical endurance	10 <sup>5</sup> operations at 1500 VA resistive 5x10 <sup>5</sup> operations at 500 VA resistive
Mechanical life (operations)	10 <sup>7</sup>

### On/off indication

Operating temperature (°C) IEC 68-2-14	0 →+50
Storage temperature (IEC 68-2-12) (°C)	-20 →+70
Internal voltage	24 V DC

### fast transients

Drop-out / short breaks / microbreaks	Un-30% for 10 ms every 1 s Un-60% for 100 ms every 1 s according to IEC 61496-1/97 Un-100% for 10 ms every 100 ms Un-50% for 20 ms every 200 ms Un-50% for 500 ms every 5 s
Material	Polycarbonate Self-extinguishing-UL94 class VO
Protection Housing	IP 40
Degree of terminal protection	IP 20
Connection capacity	2 x 1,5 mm <sup>2</sup> multicore with ferrule 2 x 2,5 mm <sup>2</sup> solid conductor
Spring terminals, 2 terminals per connection point - rigid wire	2,5 mm <sup>2</sup>
Spring terminals, 2 terminals per connection point - flexible wire	1,5 mm <sup>2</sup>


### Operating range

Synchronisation difference	KZH2-XS: < 500 ms
Reset time	KZH3-RS / < 500 ms
Response time on release of control device	KZH3-RS: < 20 ms
Maximum response time on emergency stop at Un	KZH3-RS: < 20 ms
Number of safety circuits	KZH2-XS: 2 "N/O" AgSnO contacts KZH3-RS: 3 "N/O" AgSnO contacts
Number of data circuits	KZH3-RS: 1 "NC" AgSnO contacts
Max. absorbed power	KZH2-XS: AC 1,5 VA / DC 1,5 W KZH3-RS: 24 AC 1,5 VA / 24 DC 1,5 W / 115-230 AC 3,2 VA
Dielectric strength	2.95 kV according to IEC 664-1
Resistance to tracking	Material group III
Radiated electromagnetic field	30 V / m Level X acc. to IEC 1000.4.3 80 MHz to 1GHz / 900 MHz (ENV50140 / 204)
Electrostatic discharge	15 kV in the air acc. to IEC 1000.4.2
Shock waves	Level 3 acc. to IEC 1000.4.5 Common mode 2 kV for 24 V DC and 24 V AC KZH3-RS / Common mode 4 kV for 230 V AC 2kV residual current mode
Radio frequencies in common mode	10 V rms on inputs / level 3 acc. to IEC 1000.4.6 30 V rms on supp. / Level X acc. to IEC 1000.4.6 150 kHz to 80 MHz (ENV 50141) acc. to IEC 1000.4.11


**European "Machinery" Directive 89/392/EEC**

French decree 92/765-766-768	•
European "Usage" Directive 89/655/EEC	•
French decree 93-40 /93-41	•
European "EMC" Directive 89 336/EEC	•
IEC 61496-1	•
IEC 664-1	•
En 50081-2	•
EN 50082-2	•
EN 60204-1	•
EN 292-1 and 2	•
Niveau de sécurité selon EN 574 / 97	Type III C
Safety category to EN 954-1	Catégorie 4
EN 418	•
EN 1088	•
UL 508	UL
C22-2N <sup>o</sup> 14 M91	(c) UL
GS-ET-20	BG

**Dimension Diagram : KZH2-XS**

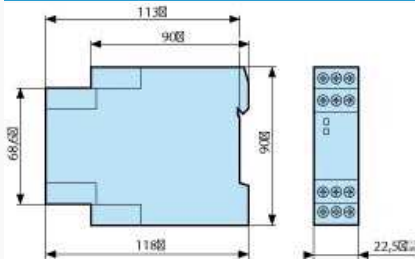

**Dimension Diagram : Mounting - Removing**

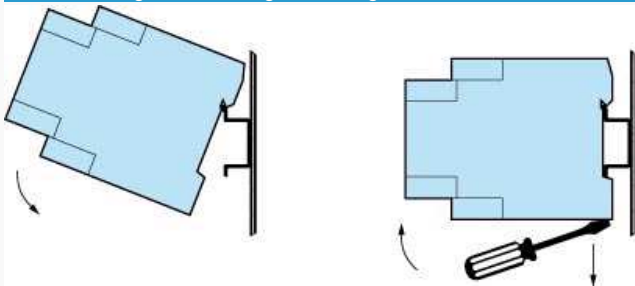

**:**




The KZH2-XS can receive the following components as inputs:

The KZH2-XS has two "N/O" safety contacts (13-14/23-24). One or more control devices may be wired up to the breaking capacity of the safety contacts: 1500 VA. However, to limit internal heating in the KZH2-XS, it is advisable not to exceed 8 A thermal for both contacts.

The number of contacts of the KZH2-XS can be extended and the breaking capacity thus increased. To do this, use the KZE3-XS.

**:**

**Lég.**

A1-A2  
 Y11-Y12-Y13 / Y21-Y22-Y23  
 13-14/23-24

**Legend**

Power supply  
 Redundant inputs with differentiated voltage for control devices  
 "N/O" safety contacts