



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 10/100Base-T Multi-Port Switch Module

## iMcV-Switch

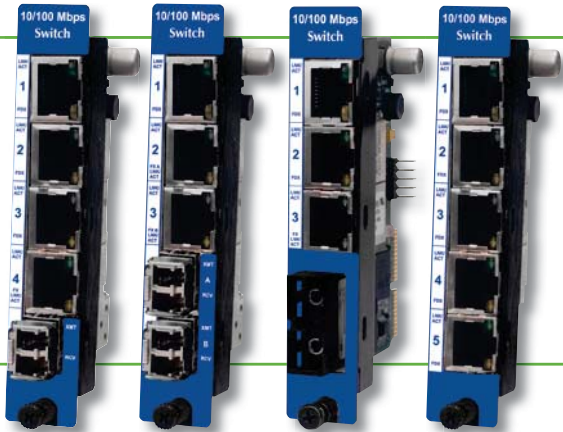

### PRODUCT FEATURES

- Multi-port 10/100Base-T
- Available in multi-mode, single-mode, single-strand fiber and SFPs
- Supports up to 1000 MAC address learning
- Transparent to VLAN tags
- Grants priority for all frames with PRI>4 or DSCP>32
- Supports Auto Cross and Auto Negotiation on all copper ports
- Supports Flow Control
- Features Collision Detection

The iMcV-Switch is a multi-port, 10/100 Ethernet module that allows the user to increase port density and the service area of Ethernet networks. The store and forward switch function allows the end user to extend Ethernet service to locations for a total of 100 meters from the Ethernet source. All RJ-45 ports Auto Negotiate 10/100Base-T, half/full duplex, and automatically configure for MDI or MDIX operation. Each port allows a maximum frame size of up to 1916 bytes and supports Flow Control and priority queuing.

The iMcV-Switch is available in four different models, some offering a configuration of copper and fiber ports, copper and fiber SFP ports and an all copper port version.



iView: Windows 2000/XP/Vista/Win7

### ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	ETHERNET PORTS	ETHERNET CONNECTOR
<b>iMcV-Switch *</b>					
852-14440			100 m	5	RJ45
852-14441	SFP	1	Various	4	RJ45
852-14442	SFP	2	Various	3	RJ45
852-14443	MM850-ST	1	2 km	3	RJ45
852-14444	MM850-SC	1	2 km	3	RJ45
852-14445	MM1300-ST	1	5 km	3	RJ45
852-14446	MM1300-SC	1	5 km	3	RJ45
852-14449	SM1310/PLUS-ST	1	40 km	3	RJ45
852-14450	SM1310/PLUS-SC	1	40 km	3	RJ45
852-14451	SM1310/LONG-ST	1	80 km	3	RJ45
852-14452	SM1310/LONG-SC	1	80 km	3	RJ45
852-14453	SM1550/LONG-SC	1	80 km	3	RJ45
852-14454	SM1550/XLONG-SC	1	100 km	3	RJ45
<b>SINGLE STRAND FIBER **</b>					
852-14470	SSFX-SM1310-SC (1310xmt/1550rcv)	1	20 km	3	RJ45
852-14471	SSFX-SM1550-SC (1550xmt/1310rcv)	1	20 km	3	RJ45
852-14472	SSFX-SM1310/PLUS-SC (1310xmt/1550rcv)	1	40 km	3	RJ45
852-14473	SSFX-SM1550/PLUS-SC (1550xmt/1310rcv)	1	40 km	3	RJ45
852-14474	SSFX-SM1310/LONG-SC (1310xmt/1550rcv)	1	60 km	3	RJ45
852-14475	SSFX-SM1550/LONG-SC (1550xmt/1310rcv)	1	60 km	3	RJ45

\* SFPs Sold Separately

\*\* These products have single-strand fiber technology. Deploy in pairs or connect another compatible B&B IMC LLC single-strand fiber product.

# 10/100Base-T Multi-Port Switch Module

iMcV-Switch



## SPECIFICATIONS

### TECHNICAL

IEEE 802.3x 10/100Base-T  
 IEEE 802.3u Auto Negotiation  
 RFC-2474 and RFC-2475 DiffServ/ToS  
 Includes diagnostic LEDs  
 AutoCross and Auto Negotiation on all ports  
 Maximum 1916 byte packet size  
 Supports Half and Full-Duplex operation  
 Connectors: RJ-45 and SC, ST, LC or SFP  
 Installs in any iMediaChassis, MediaChassis or IE-MediaChassis  
 Supports GUI-Based iView<sup>2</sup>  
 Supports Half- and Full-Duplex operation  
 Includes diagnostic LEDs  
 Includes hot-swappable architecture

### MECHANICAL

Dimensions 4.19"H x 0.78"W x 2.75"D  
 (10.74 x 2 x 7.05 cm)  
 Shipping Weight 0.30 lbs (.11 kg)

### ENVIRONMENTAL

Operating Temperature: +32° to +122° F (0° to +50° C)  
 Storage Temperature: -4° to +158° F (-20° to +70° C)  
 Operating Humidity 5% to 95% (non-condensing),  
 0 – 10,000 ft. altitude

### REGULATORY APPROVALS

FCC Class B  
 UL/cUL  
 CE

## MECHANICAL DIAGRAM

(dimensions in inches)

