



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



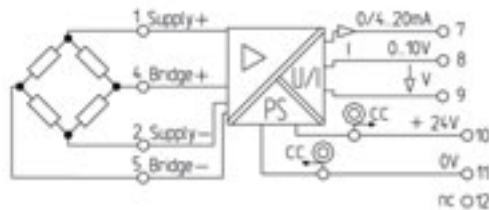

#### General ordering data

Order No.	8581200000
Part designation	WAS5 PRO Bridge
Version	Measuring bridge converter, 0...5 V, 5...0 V, 10...0 V, 0...10 V, 0...20 mA, 20...0 mA, 4...20 mA, 20...4 mA, Screw connection
EAN	4032248234509
Qty.	1 pc(s).

#### Input

Input voltage	-500 mV...+500 mV
Input resistance	> 1 M $\Omega$
Number of inputs	1

#### Output

Output voltage	0...5 V, 5...0 V, 10...0 V, 0...10 V
Output current	0...20 mA, 20...0 mA, 4...20 mA, 20...4 mA
Load resistance, voltage	$\geq 1$ k $\Omega$
Load resistance, current	$\leq 600$ $\Omega$
Accuracy	0.3% of output range
Offset voltage	max. 0.05 V
Offset current	Max. 100 $\mu$ A
Step response time	Typically < 200 ms
Status indicator	Green LED
Temperature coefficient	$\pm 250$ ppm/K of output range
Number of outputs	1

#### General data

Function	Measuring bridge converter
Input/Output	Configurable
Galvanic isolation	3-way isolator
Type of connection	Screw connection
Mounting rail	TS 35
Bridge supply voltage	+10 V, +5 V, 4.8...10.2 V; offset adjustable; max. 40mA

**General data**

Weight	100 g
Power consumption	Max. 1.9 W at I = 20 mA
Current-carrying capacity of cross-connect.	≤ 2 A
Voltage supply	24 V DC ± 25 %
Default setting	-500 mV...+500 mV / 0...10 V / + 10 V / standard
Ambient temperature (operational)	0 °C...+55 °C
Storage temperature	-20 °C...+85 °C

**Insulation coordination**

Standards	EN 50178
EMC standards	EN 61000-6 /-2
Insulation voltage input, output	2 kVeff / 5 s
Insulation voltage input or output/rail	4 kV / 1 min.
Insulation voltage input or output/supply	2 kVeff / 5 s
Clearance & creepage distances	≥ 3 mm
Impulse withstand voltage	4 kV
Pollution severity	2
Overvoltage category	III
Rated voltage	300 V

**Dimensions**

Clamping range, max.	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>
Clamping range, nom.	2.5 mm <sup>2</sup>
Length	92.4 mm
Height	112.4 mm
Width	17.5 mm

**Approvals**

Approvals institutes

**Classifications**

eClass 4.1	27-21-01-07
eClass 5.0	27-21-01-07
eClass 5.1	27-21-01-20

**Similar products**

Order No.	Part designation	Version
8581210000	WAZ5 PRO Bridge	Measuring bridge converter, 0...5 V, 5...0 V, 10...0 V, 0...10 V, 0...20 mA, 20...0 mA, 4...20 mA, 20...4 mA, Tension clamp connection