



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





**3M** Science.  
Applied to Life.™



Communication Markets Division

# 3M Fiber Connectors





# 3M Communications.

## Bringing the world's networks together.

Headquartered in Austin, Texas, 3M's Communication Markets Division creates technology that makes the world a smaller place. From fiber to passive optical LAN to wireless solutions, we're helping increase the speed of connections, while making sure networks stay up and running around the clock and around the globe.

The world's growing digital economy moves at the speed of information. 3M™ Fiber Interconnect Solutions help our customers take the lead with scalable options to help optimize speed, size and interconnectivity for growing networks. Rely on 3M expertise to help optimize existing network infrastructure and lay the foundation for future evolutions.

For more information about 3M Communications visit [3M.com/Telecom](http://3M.com/Telecom).

# 3M™ Fiber Interconnect Solutions

We're helping deliver the fastest fiber connections to homes, universities, hospitals, businesses and more. From ferruled fiber connectors and adapters, to mechanical splices, cable assemblies and accessories, our products are designed to meet increasing demand for speed and reliability.

## Table of Contents

### 3M™ Field Installable Connectors

- 3M Crimplok™+ Connectors.....5
- 3M No Polish Connectors (NPC) ..... 8
- 3M Easy Cleaver ..... 14
- 3M Hot Melt Connectors ..... 17
- 3M Crimplok™ Connectors.....19
- 3M Epoxy Connectors .....20

### 3M™ Termination Kits

- 3M Crimplok+ Connector Kits..... 21
- 3M No Polish Connector Kits .....22
- 3M Hot Melt Termination Kits..... 23
- 3M Crimplok Termination Kit .....25
- 3M Epoxy Termination Tools..... 26

### 3M™ Fibrlok™ Optical Splice System

- 3M Fibrlok Splices .....27
- 3M Fibrlok Splice Kits .....29

# 3M™ Field Installable Connectors

Reliability and a craft-friendly installations make 3M field installable connectors popular among contractors and industry professionals. 3M connectors can help maximize time in the field with factory-prepped shortcuts and high performance tools. Choose from a full line of fiber connectors with ceramic ferrules.



3M™ Fiber Connectors

## Fiber Connector Selection Charts

3M Connector	LC		SC		ST		FC	
	250/900 μm	Jacketed	250/900 μm	Jacketed	250/900 μm	Jacketed	250/900 μm	Jacketed
Crimplok™+			●	●				
No Polish	●	●	●	●	●			
Hot Melt	●	●	●	●	●	●	●	●
Crimplok			●	●	●	●		
Epoxy			●	●	●	●	●	●

## 3M™ Crimplok™+ Connectors

3M™ Crimplok™+ Connectors provide fast, easy field termination of 250 μm and 900 μm singlemode and multimode fiber and 1.6 to 3.0 mm jacketed cable without a splice, gel or adhesive. The connectors are SC compatible with a metallic element that mechanically locks the fiber in place. To terminate, the fiber is cleaved, inserted through the connector and locked in place using the 3M™ Crimplok™+ Activation Tool and the fiber tip polished with the 3M™ Crimplok™+ Nano Finishing Tool. This hand tool utilizes a polishing film and an orbital mechanism that polishes with a single turn of the handle. Once completed, the connector is cleaned and ready for use. The Crimplok+ Connectors and Tools are RoHS compliant.\*

Crimplok+ connectors have a thermally balanced design that is tested for premises and FTTP applications for indoor and outdoor conditions.

### Features and Benefits

3M™ Crimplok™+ Connectors	
No splice, gel or adhesive	No splice interface/potential optical loss point
Simple assembly tools	Fast, easy installation without electrical power
Angle nano finishing tool for SC/APC connectors	Helps eliminate high CapEx of angle cleaver
Polishing film with every connector	Always have new polishing film
Field termination	Always the right cable length with virtually no cable slack to store



3M™ Crimplok™+ 250μm/900μm Connector Family



3M™ Crimplok™+ Singlemode Jacketed Connectors



3M™ Crimplok™+ Activation Tool, a Singlemode SC APC 250/900um connector and a lapping film



### 3M™ Crimplok™ + Connector 250µm/900µm SC Series Specifications

Product Number	Multimode			Singlemode	
	6700-AT/62.5	6700-AT/50	6700 AT/-50LOMFF	8700-AT/UPC	8700-AT/APC
<b>Connector identification</b>	Beige/White	Black/White	Aqua/White	Blue/White	Green/White
<b>Insertion loss (dB)</b> Typical	0.2	0.2	0.2	0.2	0.25
<b>Reflectance (dB)</b> Typical at room temp	<-25	<-30	<-30	<-40	<-65
<b>Reflectance (dB)</b> Over operating temperature range	<-25	<-30	<-30	<-35	<-60
<b>Operating temperature range</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-40°C to 75°C	-40°C to 75°C
<b>Storage temperature</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-40°C to 85°C	-40°C to 85°C
<b>Material</b> Connector ferrule Connector housing and body Boot	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer
<b>Installation tool</b>	8765-AT/UPC	8765-AT/UPC	8765-AT/UPC	8765-AT/UPC	8765-AT/APC
<b>Nano finishing tool</b>	8765-NF/UPC	8765-NF/UPC	8765-NF/UPC	8765-NF/UPC	8765-NF/APC
<b>Field termination kit</b>	8765T-UPC	8765T-UPC	8765T-UPC	8765T-UPC	8765T-APC

### 3M™ Crimplok™ + Jacketed Connector Specifications

Product Number	Singlemode	
	8702/UPC/1.6-3	8702/APC/1.6-3
<b>Connector identification</b>	Blue/White	Green/White
<b>Insertion loss (dB)</b> Typical	0.2	0.3
<b>Reflectance (dB)</b> Typical at room temp	<-40	<-65
<b>Reflectance (dB)</b> Over operating temperature range	<-35	<-60
<b>Operating temperature range</b>	-10°C to 60°C	-10°C to 60°C
<b>Storage temperature</b>	-10°C to 60°C	-10°C to 60°C
<b>Material</b> Connector ferrule Connector housing and body Boot	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer
<b>Installation tool</b>	8765-PS/UPC/JT	8765-PS/APC/JT
<b>Nano finishing tool</b>	8765-NF/UPC	8765-NF/APC
<b>Field termination kit</b>	8765T-UPC/250-900-JKT	8765T-APC/250-900-JKT

### 3M™ Crimplok™+ Connector Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
8700-AT/UPC	Crimplok+ Connector SC/UPC SM 250/900 μm with Activation Tool	60/package	60 each	80-6116-2208-7
8700-AT/APC	Crimplok+ Connector SC/APC SM 250/900 μm with Activation Tool	60/package	60 each	80-6116-2200-4
6700-AT/62.5	Crimplok+ Connector SC MM 62.5 μm (OM1) 250/900 μm with Activation Tool	60/package	60 each	80-6116-2211-1
6700-AT/50	Crimplok+ Connector SC MM 50 μm (OM2) 250/900 μm with Activation Tool	60/package	60 each	80-6116-2209-5
6700-AT/50LOMMF	Crimplok+ Connector SC MM 50 μm LOMMF (OM3/4) 250/900 μm with Activation Tool	60/package	60 each	80-6116-2210-3

### 3M™ Crimplok™+ Jacketed Connector Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
8702/UPC/1.6-3	3M™ Crimplok™+ SC/UPC Jacketed Connector	60/package	60 each	80-6114-9633-4
8702/APC/1.6-3	3M™ Crimplok™ SC/APC Jacketed Connector	60/package	60 each	80-6114-9632-6
8765-PS/UPC/JT	Protrusion Setting Tool with fiber holder for jacketed SC/UPC connector	1/package	1 each	80-6114-9642-5
8765-PS/APC/JT	Protrusion Setting Tool with fiber holder for jacketed SC/APC connector	1/package	1 each	80-6114-9643-3
8765-UPC/ADD	Protrusion Setting Tool SC/UPC with fiber holder and two jacket slitting tools	1/package	1 each	80-6115-9646-6
8765-APC/ADD	Protrusion Setting Tool SC/APC with fiber folder and two jacket slitting tools	1/package	1 each	80-6114-9647-5



## 3M™ No Polish Connectors (NPC)

3M No Polish Connectors help enable fast, on-site installation of 250 µm and 900 µm singlemode and multimode fiber and 1.6 to 3.0 mm jacketed cable. With a factory-polished ferrule assembly and a mechanical splice, the connector can be quickly installed — without electrical power — using a simple field tool that is included in every box of 60 connectors (when required). For excellent mechanical performance, the 3M NPC has internal gripping elements for the strain relief of the fiber.

The 250/900 µm SC and LC 3M NPCs utilize a one-piece, pre-assembled design that eliminates field polishing and loose parts. The SC and LC 3M NPCs for jacketed cable can be installed without an assembly tool. A twist-on boot clamps onto the cable jacket and aramid fiber to provide excellent strain relief.


The SC/APC and LC/APC compatible 3M NPC are available with a standard, flat splice configuration or with a keyed, angle splice for excellent back reflection. To maximize installation yield, the splice in the connector can be opened and re-terminated with a cap lifter. The assembly tool and cap lifter are included in every box of 60 connectors (when required).

### Features and Benefits

3M™ No Polish Connectors	
Field termination	Right cable length with no cable slack to store
Simple assembly tool	Fast, easy installation
250/900 µm Connectors and Jacketed connectors available	Potentially improve supply chain and inventory management
Factory-polished fiber stub in ferrule	No on-site polish or adhesives required
Keyed, angle cleave splice for APC	Low reflectance, <-60 dB across temperature extremes

### 3M™ No Polish SC Connector Ordering Information


Product Number	Description	3M ID	Min. Order Connector	Packaging (connectors per box)	Assembly Tools incl.	Easy Cleaver incl.
8800-APC/FS/C	SM No Polish SC/APC Connector flat splice with Easy Cleaver	80-6114-9412-3	120	120	2 sets	1 unit
8800/C	SM No Polish SC/UPC Connector with Easy Cleaver	80-6114-9411-5	120	120	2 sets	1 unit
8802-T/1.6-3/C	SM No Polish SC/UPC Connector 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-8225-0	120	120	not needed	1 unit
8802-T/APC/FS/1.6-3/C	SM No Polish SC/APC Connector 1.6-3.0 mm Jacket flat splice with Easy Cleaver	80-6114-8226-8	120	120	not needed	1 unit
6800-50/C_60	MM No Polish SC Connector 50 µm with Easy Cleaver	80-6114-9419-8	60	60	1 set	1 unit
6800-50LOMMF/C_60	MM No Polish SC Connector 50 µm laser optimized with Easy Cleaver	80-6114-9420-6	60	60	1 set	1 unit
6800-62.5/C_60	MM No Polish SC Connector 62.5 µm with Easy Cleaver	80-6114-9421-4	60	60	1 set	1 unit
6802-T/50/1.6-3/C_60	MM No Polish SC/UPC Connector 50 µm 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-9422-2	60	60	not needed	1 unit
6802-T/50LOMMF/1.6-3/C_60	MM No Polish SC/UPC Connector 50 µm LOMMF 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-9423-0	60	60	not needed	1 unit
6802-T/62.5/1.6-3/C_60	MM No Polish SC/UPC Connector 62.5 µm 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-9424-8	60	60	not needed	1 unit

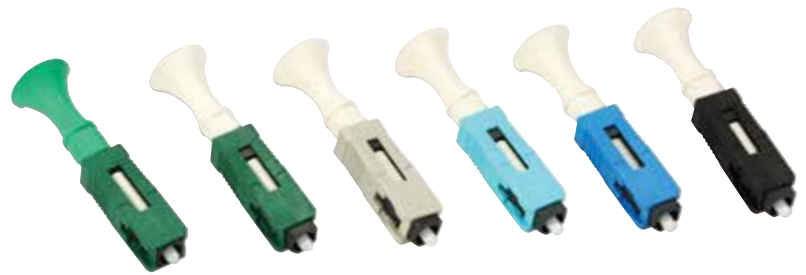

3M™ No Polish SC Connector Family

### 3M™ No Polish SC Connector Specifications

Connector Type	Multimode			Singlemode		
	SC	SC	SC	SC	SC/APC	SC/APC
Product Number	6800-50	6800-50LOMMF	6800-62.5	8800	8800-APC/FS	8800-APC/AS
Connector identification						
Backbone color	Black	Black	Black	Black	Black	Black
Shell color	Black	Aqua	Beige	Blue	Green	Green
Housing color	White	White	White	White	White	Green
Cable jacket size (mm)	1.6, 2.0, 3.0	1.6, 2.0, 3.0	1.6, 2.0, 3.0	1.6, 2.0, 3.0	1.6, 2.0, 3.0	1.6, 2.0, 3.0
Fiber type	50 μm MM (OM2)	50 μm LOMMF (OM3/4)	62.5 μm MM (OM1)	SM	SM	SM
Cleave	Flat	Flat	Flat	Flat	Flat	Angle
Assembly tool	8865-AT	8865-AT	8865-AT	8865-AT	8865-AT	8865-AT
Insertion loss (dB) Typical	0.2	0.2	0.2	0.3	0.3	0.3
Reflectance (dB) Typical at room temp	<-30	<-30	<-25	<-40	<-55	<-65
Reflectance (dB) Over operating temperature range	<-30	<-30	<-25	<-35	<-35	<-60
Operating temperature range	-10 to 60°C	-10°C to 60°C	-10°C to 60°C	-40°C to 75°C	-40°C to 75°C	-40°C to 75°C
Storage temperature	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C
Material						
Connector ferrule	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic
Connector housing and body	Engineered resin	Engineered resin	Engineered resin	Engineered resin	Engineered resin	Engineered resin
Boot	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer
Field termination kit (no power needed)	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	2565

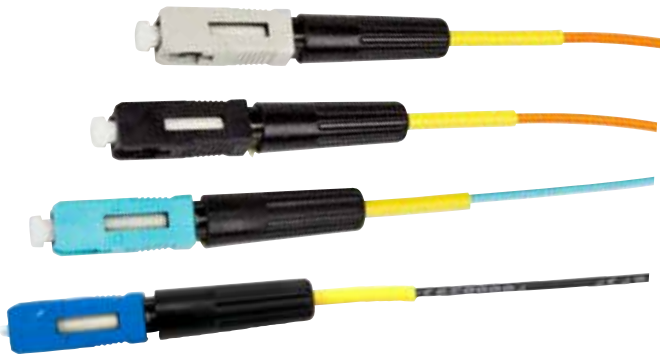

3M™ No Polish Jacketed SC/UPC Connector Family

### 3M™ No Polish Connector SC/UPC Jacket Specifications

Product Number	Multimode			Singlemode
	6802-T/50/1.6-3	6802-T/50/LOMMF/1.6-3	8802-T/62.5/1.6-3	8802-T/1.6-3
<b>Connector identification</b>				
Backbone color	Black	Black	Black	Black
Shell color	Black	Aqua	Beige	Blue
Housing color	White	White	White	White
<b>Cable jacket size</b>	1.6, 2.0, 3.0	1.6, 2.0, 3.0	1.6, 2.0, 3.0	1.6, 2.0, 3.0
Housing color				
<b>Insertion Loss (dB)</b>	0.2	0.2	0.2	0.3
Typical				
<b>Reflectance (dB)</b>	<-30	<-30	<-25	<-40
Typical at room temp				
<b>Reflectance (dB)</b>	<-30	<-30	<-25	<-35
Over operating temperature range				
<b>Operating temperature range</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-40°C to 75°C
<b>Storage temperature</b>	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C
<b>Material</b>				
Connector ferrule	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic
Connector housing and body	Engineered resin	Engineered resin	Engineered resin	Engineered resin
Boot	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer
<b>Field termination kit (optional)</b>	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR

### 3M™ No Polish Connector SC/UPC Jacket Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
6802-T/50/1.6-3	No Polish SC/UPC Connector MM 50 μm 1.6-3.0 mm Jacket	60/package	60 each	80-6113-9828-2
6802-T/50/LOMMF/1.6-3	No Polish SC/UPC Connector MM 50 μm LOMMF 1.6-3.0 mm Jacket	60/package	60 each	80-6113-9829-0
6802-T/62.5/1.6-3	No Polish SC/UPC Connector MM 62.5 μm 1.6-3.0 mm Jacket	60/package	60 each	80-6113-9830-8
8802-T/1.6-3	No Polish SC/UPC Connector SM 1.6-3.0 mm Jacket	60/package	60 each	80-6113-3507-8



3M™ No Polish SC/APC Connector Flat and Angle Splice  
1.6-3 mm Jacket

### 3M™ No Polish Jacketed SC/APC Connector Specifications

Product Number	Singlemode	
	8802-T/APC/AS/1.6-3	8802-T/APC/FS/1.6-3
<b>Connector identification</b> Backbone color Shell color Housing color	Green Green White	Black Green White
<b>Cable jacket size (mm)</b>	1.6, 2.0, 3.0	1.6, 2.0, 3.0
<b>Insertion Loss (dB)</b> Typical	0.3	0.3
<b>Reflectance (dB)</b> Typical at room temp	<-65	<-55
<b>Reflectance (dB)</b> Over operating temperature range	<-60	<-35
<b>Operating temperature range</b>	-40°C to 75°C	-40°C to 75°C
<b>Storage temperature</b>	-40°C to 85°C	-40°C to 85°C
<b>Connector identification</b>	Green/Green	Green/Black
<b>Field termination kit</b>	2565 (required)	8865-C or 8865-C/PR (optional)

### 3M™ No Polish Jacketed SC/APC Connector Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
8802-T/APC/AS/1.6-3	No Polish SC/APC Connector Angle Splice 1.6-3 mm Jacket	60/package	60 each	80-6113-3505-2
8802-T/APC/FS/1.6-3	No Polish SC/APC Connector Flat Splice 1.6-3 mm Jacket	60/package	60 each	80-6113-3509-4



### 3M™ No Polish LC Connector Specifications

Connector Type	Multimode			Singlemode		
	LC	LC	LC	LC	LC/APC	LC/APC
Product Number	6830-50	6830-50LOMMF	6830-62.5	8830	8830-APC/FS	8830-APC/AS
<b>Applications</b>	Data	Data	Data	Data, IPTV	Data, IPTV	Data, IPTV, Analog TV
<b>Connector identification</b> Backbone color Shell color Housing color	Black Black White	Black Aqua White	Black Beige White	Black Blue White	Black Green White	Black Green Green
<b>Fiber type</b>	50 μm MM (OM2)	50 μm LOMMF (OM3/4)	62.5 μm MM (OM 1)	SM	SM	SM
<b>Cleave</b>	Flat	Flat	Flat	Flat	Flat	Angle
<b>Assembly tool</b>	8835-AT	8835-AT	8835-AT	8835-AT	8835-AT	8835-AT
<b>Insertion loss (dB)</b> Typical	0.2	0.2	0.2	0.3	0.3	0.3
<b>Reflectance (dB)</b> Typical at room temp	<-30	<-30	<-25	<-40	<-55	<-65
<b>Reflectance (dB)</b> Over operating temperature range	<-30	<-30	<-25	<-35	<-35	<-60
<b>Operating temperature range</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-40°C to 75°C	-40°C to 75°C	-40°C to 75°C
<b>Storage temperature</b>	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C
<b>Material</b> Connector ferrule Connector housing and body Boot	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer	Zirconia ceramic Engineered resin  Thermoplastic elastomer
<b>Field termination kit</b> (no power needed)	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	2565



3M™ No Polish LC Connector Family

### 3M™ No Polish LC Connector Ordering Information

Product Number	Description	3M ID	Min. Order Connector	Packaging (connectors per box)	Assembly Tools incl.	Easy Cleaver incl.
8830-APC/FS/C	SM No Polish LC/APC Connector flat splice with Easy Cleaver	80-6114-9416-4	120	120	2 sets	1 unit
8830/C	SM No Polish LC/UPC Connector with Easy Cleaver	80-6114-9415-6	120	120	2 sets	1 unit
8832-T/1.6-2/C	SM No Polish LC/UPC Connector 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9417-2	120	120	not needed	1 unit
6830-50/C_60	MM No Polish LC Connector 50 μm with Easy Cleaver	80-6114-9425-5	60	60	1 set	1 unit
6830-50LOMMF/C_60	MM No Polish LC Connector 50 μm laser optimized with Easy Cleaver	80-6114-9426-3	60	60	1 set	1 unit
6830-62.5/C_60	MM No Polish LC Connector 62.5 μm with Easy Cleaver	80-6114-9427-1	60	60	1 set	1 unit
6832-T/50/1.6-2/C_60	MM No Polish LC/UPC Connector 50 μm 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9428-9	60	60	not needed	1 unit
6832-T/50LOMMF/1.6-2/C_60	MM No Polish LC/UPC Connector 50 μm LOMMF 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9429-7	60	60	not needed	1 unit
6832-T/62.5/1.6-2/C_60	MM No Polish LC/UPC Connector 62.5 μm 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9430-5	60	60	not needed	1 unit

### 3M™ No Polish Connector LC/UPC Jacket Specifications

Product Number	Multimode			Singlemode
	6832-T/50/1.6-2	6832-T/50/LOMMF/1.6-2	6832-T/62.5/1.6-2	8832-T/1.6-2
<b>Connector identification</b> Backbone color Shell color Housing color	Black Black White	Black Aqua White	Black Black White	Black Blue White
<b>Cable jacket size (mm)</b>	1.6, 2.0	1.6, 2.0	1.6, 2.0	1.6, 2.0
<b>Insertion loss (dB)</b> Typical	0.2	0.2	0.2	0.3
<b>Reflectance (dB)</b> Typical at room temp	<-30	<-30	<-25	<-35
<b>Reflectance (dB)</b> Over operating temperature range	<-30	<-30	<-25	<-40
<b>Operating temperature range</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C
<b>Storage temperature</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C
<b>Material</b> Connector ferrule Connector housing and body Boot	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer	Zirconia ceramic Engineered resin Thermoplastic elastomer
<b>Field termination kit</b>	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR

### 3M™ No Polish Connector LC/UPC Jacket Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
8832-T/1.6-2	No Polish LC/UPC Connector SM 50 µm 1.6-2.0 mm Jacket	60/package	60 each	80-6113-9839-9
6832-T/50/1.6-2	No Polish LC/UPC Connector MM 50 µm 1.6-2.0 mm Jacket	60/package	60 each	80-6113-9840-7
6832-T/50/ LOMMF/1.6-2	No Polish LC/UPC Connector MM 50 µm LOMMF 1.6-2.0 mm Jacket	60/package	60 each	80-6113-9841-5
6832-T/62.5/1.6-2	No Polish LC/UPC Connector MM 62.5 µm 1.6-2.0 mm Jacket	60/package	60 each	80-6113-9842-3



3M™ No Polish ST Connector Family

### 3M™ No Polish ST Connector Specifications

Product Number	Multimode			Singlemode
	6840-50	6840-50/LOMMF	6840-62.5	8840
<b>Connector identification</b>				
Backbone color	Black	Black	Black	Black
Shell color	Black	Aqua	Beige	Blue
Housing color	White	White	White	White
<b>Insertion loss (dB)</b> Typical	0.2	0.2	0.2	0.3
<b>Reflectance (dB)</b> Typical at room temp	<-30	<-30	<-25	<-40
<b>Reflectance (dB)</b> Over operating temperature range	<-30	<-30	<-25	<-35
<b>Operating temperature range</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C
<b>Storage temperature</b>	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C
<b>Connector identification</b>				
Housing	Black	Aqua	Beige	Blue
Boot	White	White	White	White
<b>Material</b>				
Connector ferrule	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic
Connector housing and body	Engineered resin	Engineered resin	Engineered resin	Engineered resin
Boot	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer
<b>Field Termination Kit</b>	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR	8865-C or 8865-C/PR

### 3M™ No Polish ST Connector Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
6840-50	No Polish ST Connector MM 50 μm, 250/900 buffer, 60 pack (black housing) with assembly tool	60/package	60 each	80-6113-9511-4
6840-50/12	No Polish ST Connector MM 50 μm, 250/900 buffer, 12 pack (black housing)	12/package	12 each	80-6113-9514-8
6840-50/LOMMF	No Polish ST Connector MM 50 μm LO, 250/900 buffer, 60 pack (aqua housing) with assembly tool	60/package	60 each	80-6113-9512-2
6840-50/LOMMF/12	No Polish ST Connector MM 50 μm LO, 250/900 buffer, 12 pack (aqua housing)	12/package	12 each	80-6113-9515-5
6840-62.5	No Polish ST Connector MM 62.5 μm, 250/900 buffer, 60 pack (beige housing) with assembly tool	60/package	60 each	80-6113-9513-0
6840-62.5/12	No Polish ST Connector MM 62.5 μm, 250/900 buffer, 12 pack (beige housing)	12/package	12 each	80-6113-9516-3
8840	No Polish ST Connector SM, 250/900 buffer, 60 pack (blue housing) with assembly tool	60/package	60 each	80-6113-9517-1
8840/12	No Polish ST Connector SM, 250/900 buffer, 12 pack (blue housing)	12/package	12 each	80-6113-9518-9
8845-AT	No Polish ST Connector Assembly Tool	1 each	1 each	80-6113-9519-7



## 3M™ Easy Cleaver Combo

Available in select packages of connectors and splices, the 3M™ Easy Cleaver is the latest cleaving innovation from 3M. The 3M Easy Cleaver is designed to simplify installations and lower capital expenditure when terminating all 3M flat-cleave, field-installable connectors and splices.

Unlike other blade-enabled fiber cleaving tools, the 3M Easy Cleaver requires no maintenance because of its diamond wire cleaving mechanism. Use it to create smooth end-faces repeatedly – each tool performs up to 120 cleaves. See the ordering chart for specific details on packaging.



3M™ Easy Cleaver

### Features and Benefits

3M™ Easy Cleaver	
Life cycle counter	Conveniently helps users to keep track of cleaver life
Diamond wire shuttle	Virtually no maintenance or blade rotation required, which can help reduce downtime
Innovative fiber clamp design	Provides precise and repeatable cleaves
Strip and cleave length markings	Clear indication of specified strip lengths for 3M connector and splice installations
Lightweight and durable	Suitable for both indoor and outdoor work environments



3M™ Easy Cleaver

### Specifications

Feature	
<b>Dimensions</b>	133 × 68 × 29.5 mm (5.24 × 2.68 × 1.16 in) approx.
<b>Weight</b>	62 gm (2.2 oz) approx.
<b>Compatible fibers</b> Buffered Jacketed Cable Drop Cable	250 μm / 900 μm tight buffer Up to 3 mm 1.6 × 2 mm and 2 × 3 mm FRP
<b>Perpendicular Cleave</b>	<3° typical
<b>Cleave lengths</b>	8 - 24 mm (Specific cleave length markings are 8, 10, 12.5, 19, 20 and 24 mm)
<b>Strip lengths</b>	42 - 58 mm
<b>Cleaver life</b>	Approximately 120 cleaves*
<b>Performance</b>	Flat cleave: 3M field-installable connectors and splices perform to their individual specifications when terminated with the 3M™ Easy Cleaver if the 3M Easy Cleaver is used per 3M instructions.

\*Once 120 cleaves are performed, properly dispose of the cleaver per company practice.

### Cleave Length Guide

3M Products	Cleave Length (mm)	Fiber Strip length (mm)
3M™ No Polish Connectors	8	42
3M™ Fibrok™ II Splices	12.5	46
3M™ Crimplok™+ 250 μm Connectors	19	52
3M™ Crimplok™+ 900 μm Connectors	24	58

## 3M™ Easy Cleaver Ordering Information

Product No.	Description	3M ID	Min. Order Connector	Packaging (connectors per box)	Assembly Tools incl.	Easy Cleaver incl.
<b>3M™ No Polish Connectors</b>						
<b>SC Connector Type</b>						
8800-APC/FS/C	SM No Polish SC/APC Connector flat splice with Easy Cleaver	80-6114-9412-3	120	120	2 sets	1 unit
8800/C	SM No Polish SC/UPC Connector with Easy Cleaver	80-6114-9411-5	120	120	2 sets	1 unit
8802-T/1.6-3/C	SM No Polish SC/UPC Connector 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-8225-0	120	120	not needed	1 unit
8802-T/APC/FS/1.6-3/C	SM No Polish SC/APC Connector 1.6-3.0 mm Jacket flat splice with Easy Cleaver	80-6114-8226-8	120	120	not needed	1 unit
6800-50/C_60	MM No Polish SC Connector 50 µm with Easy Cleaver	80-6114-9419-8	60	60	1 set	1 unit
6800-50LOMMF/C_60	MM No Polish SC Connector 50 µm laser optimized with Easy Cleaver	80-6114-9420-6	60	60	1 set	1 unit
6800-62.5/C_60	MM No Polish SC Connector 62.5 µm with Easy Cleaver	80-6114-9421-4	60	60	1 set	1 unit
6802-T/50/1.6-3/C_60	MM No Polish SC/UPC Connector 50 µm 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-9422-2	60	60	not needed	1 unit
6802-T/50LOMMF/1.6-3/C_60	MM No Polish SC/UPC Connector 50 µm LOMMF 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-9423-0	60	60	not needed	1 unit
6802-T/62.5/1.6-3/C_60	MM No Polish SC/UPC Connector 62.5 µm 1.6-3.0 mm Jacket with Easy Cleaver	80-6114-9424-8	60	60	not needed	1 unit
<b>LC Connector Type</b>						
8830-APC/FS/C	SM No Polish LC/APC Connector flat splice with Easy Cleaver	80-6114-9416-4	120	120	2 sets	1 unit
8830/C	SM No Polish LC/UPC Connector with Easy Cleaver	80-6114-9415-6	120	120	2 sets	1 unit
8832-T/1.6-2/C	SM No Polish LC/UPC Connector 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9417-2	120	120	not needed	1 unit
6830-50/C_60	MM No Polish LC Connector 50 µm with Easy Cleaver	80-6114-9425-5	60	60	1 set	1 unit
6830-50LOMMF/C_60	MM No Polish LC Connector 50 µm laser optimized with Easy Cleaver	80-6114-9426-3	60	60	1 set	1 unit
6830-62.5/C_60	MM No Polish LC Connector 62.5 µm with Easy Cleaver	80-6114-9427-1	60	60	1 set	1 unit
6832-T/50/1.6-2/C_60	MM No Polish LC/UPC Connector 50 µm 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9428-9	60	60	not needed	1 unit
6832-T/50LOMMF/1.6-2/C_60	MM No Polish LC/UPC Connector 50 µm LOMMF 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9429-7	60	60	not needed	1 unit
6832-T/62.5/1.6-2/C_60	MM No Polish LC/UPC Connector 62.5 µm 1.6-2.0 mm Jacket with Easy Cleaver	80-6114-9430-5	60	60	not needed	1 unit

### 3M™ Easy Cleaver Ordering Information (continued)

Product No.	Description	3M ID	Min. Order Connector	Packaging (connectors per box)	Assembly Tools incl.	Easy Cleaver incl.
<b>ST Connector Type</b>						
8840/C	SM No Polish ST Connector 250/900 µm buffer and Easy Cleaver	80-6114-9418-0	120	120	2 sets	1 unit
6840-50/C_60	MM No Polish ST Connector 50 µm, 250/900 µm buffer and Easy Cleaver	80-6114-9431-3	60	60	1 set	1 unit
6840-50LOMMF/C_60	MM No Polish ST Connector 50 µm LO, 250/900 µm buffer and Easy Cleaver	80-6114-9432-1	60	60	1 set	1 unit
6840-62.5/C_60	MM No Polish ST Connector 62.5 µm, 250/900 µm buffer and Easy Cleaver	80-6114-9433-9	60	60	1 set	1 unit
<b>3M™ Crimplok™+ Connectors</b>						
8700-AT/APC/C	3M Crimplok+ Connector SC/APC SM 250/900 µm and Easy Cleaver	80-6116-2233-5	120	120	2 sets	1 unit
8700-AT/UPC/C	3M Crimplok+ Connector SC/UPC SM 250/900 µm and Easy Cleaver	80-6116-2234-3	120	120	2 sets	1 unit
6700-AT/62.5/C-60	3M Crimplok+ Connector SC MM 62.5 µm (OM1) 250/900 µm and Easy Cleaver	80-6116-2241-8	60	60	1 set	1 unit
6700-AT/50/C-60	3M Crimplok+ Connector SC MM 50 µm (OM2) 250/900 µm and Easy Cleaver	80-6116-2240-0	60	60	1 set	1 unit
6700-AT/50LOMMF/C-60	3M Crimplok+ Connector SC MM 50 µm LOMMF (OM3/4) 50/900 µm and Easy Cleaver	80-6116-2242-6	60	60	1 set	1 unit
<b>3M™ Fibrlok™ II Universal Optical Fiber Splice</b>						
2529/C_60	3M Fibrlok II Universal Optical Fiber Splice for 250/900 µm fiber with Easy Cleaver	80-6114-9439-6	60	60	none	1 unit

## 3M™ Hot Melt Connectors

3M™ Hot Melt Connectors come pre-loaded with advanced 3M hot melt adhesive. There is no need for epoxy mixing and application so the termination time averages just two minutes. The 3M hot melt connector's reliability, high performance and ease of use, in both indoor and outdoor LANs worldwide, have made it an industry favorite.

The 3M Hot Melt LC Connector in both singlemode and multimode has all the advantages of our pre-loaded hot melt technology — and at half the size of our SC connector.



3M™ Hot Melt SC Connector



3M™ Hot Melt LC Connector

## Features and Benefits

3M™ Hot Melt LC, SC, ST and FC Connectors	
Pre-loaded hot melt adhesive	Extended shelf life as compared to epoxy versions; fewer consumables (cost effective); no epoxy to mix; no syringe needed; shorter set-up time; no mess; no waste
No waiting for epoxy to cure	Termination in approximately two minutes increases productivity; short heat and cool cycle; saves time
Single-step polish for multimode	Only one abrasive to buy; faster polishing (cost effective)
Extended adhesive shelf life	Reduces outdated epoxy inventory and stock rotation requirements
Pre-radiused PC ferrule	Designed to provide contact of fibers; consistent performance

## 3M Hot Melt Connector Specifications

Connector Type	Multimode				Singlemode		
	ST	FC	SC	LC	ST	SC	LC
Product Family	6100	6200	6300	6600	8100YS	8300	8600
<b>Insertion loss (dB)</b> Typical	0.2	0.2	0.2	0.2	0.2	0.2	0.2
<b>Reflectance (dB)</b> Typical	<-25	<-25	<-25	<-25	<-40	<-40	<-40
<b>Operating temperature range</b>	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C
<b>Storage temperature</b>	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C
<b>Material</b>							
Connector ferrule	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic
Connector housing and body	Engineered resin	Engineered resin	Engineered resin	Engineered resin	Engineered resin	Engineered resin	Engineered resin
Boot	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer
<b>Field termination kit</b>							
120 V	6366	6366	6366	+	6366	6366	+
220 V	6362	6362	6362		6362	6362	

+ LC hot melt connectors require the 6650-LC expansion kit plus either the 6366 or 6362



## 3M Hot Melt Connector Ordering Information

Product Number	Description	Packaging	Min. Order	3M ID
6100-B	MM Hot Melt ST ceramic, black boot	1/bag, 60/carton	60 each	80-6111-2754-1
6100-R	MM Hot Melt ST ceramic, red boot	1/bag, 60/carton	60 each	80-6111-2755-8
6100-W	MM Hot Melt ST ceramic, white boot	1/bag, 60/carton	60 each	80-6111-2753-3
6200	MM Hot Melt FC ceramic, white boot	1/bag, 60/carton	60 each	80-6111-2758-2
6300-W	MM Hot Melt SC ceramic, white boot	1/bag, 60/carton	60 each	80-6111-2757-4
6600-S	MM Hot Melt LC simplex 900 BTW white boot	1/bag, 60/carton	60 each	80-6113-1429-7
6602-S	MM Hot Melt LC simplex 1.6-2.0 cable white boot	1/bag, 60/carton	60 each	80-6113-1349-7
6603-S	MM Hot Melt LC simplex 2.4-3.0 cable white boot	1/bag, 60/carton	60 each	80-6113-1430-5
6601-D	MM Hot Melt LC duplex 900 buffer white/beige boots	1/bag, 60/carton	60 each	80-6113-1431-3
6602-D	MM Hot Melt LC duplex 1.6-2.0 cable white/beige boots	1/bag, 60/carton	60 each	80-6113-1350-5
6603-D	MM Hot Melt LC duplex 2.4-3.0 cable white/beige boots	1/bag, 60/carton	60 each	80-6113-1432-1
6604-D	MM Hot Melt LC duplex 900 buffer red/black boots	1/bag, 60/carton	60 each	80-6113-1433-9
6605-D	MM Hot Melt LC duplex 1.6-2.0 cable red/black boots	1/bag, 60/carton	60 each	80-6113-1434-7
6606-D	MM Hot Melt LC duplex 2.4-3.0 cable red/black boots	1/bag, 60/carton	60 each	80-6113-1435-4
8100-YS	SM Hot Melt ST ceramic, yellow boot	1/bag, 60/carton	60 each	80-6111-2762-4
8200-W	SM Hot Melt FC ceramic, white boot	1/bag, 60/carton	60 each	80-6111-7612-6
8300	SM Hot Melt SC ceramic, white boot	1/bag, 60/carton	60 each	80-6111-2765-7
8600-S	SM Hot Melt LC simplex 900 BTW white boot	1/bag, 60/carton	60 each	80-6113-1436-2
8602-S	SM Hot Melt LC simplex 1.6-2.0 cable white boot	1/bag, 60/carton	60 each	80-6113-1351-3
8603-S	SM Hot Melt LC simplex 2.4-3.0 cable white boot	1/bag, 60/carton	60 each	80-6113-1437-0
8601-D	SM Hot Melt LC duplex 900 buffer white/beige boots	1/bag, 60/carton	60 each	80-6113-1438-8
8602-D	SM Hot Melt LC duplex 1.6-2.0 cable white/beige boots	1/bag, 60/carton	60 each	80-6113-1352-1
8603-D	SM Hot Melt LC duplex 2.4-3.0 cable white/beige boots	1/bag, 60/carton	60 each	80-6113-1439-6

Note: MM – Multimode; SM – Singlemode

## 3M™ Crimplok™ Connectors

3M™ Crimplok™ Connectors need no adhesive, providing the speed of non-adhesive connectors with the optical performance of 3M™ Hot Melt Connectors.



3M™ Crimplok™ ST Connector

By using proven malleable metal element fiber-gripping technology, these connectors are designed to be easily installed virtually anywhere without the need for electrical power.

### Features and Benefits

3M™ Crimplok™ Connectors	
Non-adhesive, non-splice design	Clean and simple terminations
No tool set-up required	Improved efficiency
No waiting for epoxy to cure	Termination in less than one minute with fully prepared fiber
No power or electricity required	Installation practically anywhere

### 3M Crimplok Connector Specifications

Connector Type	Multimode		Singlemode	
	SC	ST	SC	ST
Product Number	6900	6901	8900	8901
<b>Connector identification</b>				
Body color	Black	Black	Black	Black
Shell color	Beige	Beige	Blue	Beige
Boot color	Black	Beige	Black	Blue
<b>Insertion loss (dB)</b> Typical	0.2	0.2	0.2	0.2
<b>Reflectance (dB)</b> Typical	<-25	<-25	<-40	<-40
<b>Operating temperature range</b>	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C
<b>Storage temperature</b>	-10° to 60°C	-10° to 60°C	-10° to 60°C	-10° to 60°C
<b>Material</b>				
Connector ferrule	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic
Connector housing	Engineered resin	Thermoplastic polymer	Engineered resin	Thermoplastic polymer
Boot	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer
<b>Field termination kit</b> No power needed	6955	6955	6955	6955

### 3M Crimplok Connector Ordering Information

Product Number	Connector Type	Package	Minimum Order	3M ID
6900	MM Crimplok SC Connector ceramic	60/carton	60 each	80-6108-4525-9
6901	MM Crimplok ST Connector ceramic	60/carton	60 each	80-6108-4523-4
8900	SM Crimplok SC Connector ceramic	60/carton	60 each	80-6110-1257-8
8901	SM Crimplok ST Connector ceramic	60/carton	60 each	80-6110-1259-4

Note: MM - Multimode; SM - Singlemode

## 3M™ Epoxy Connectors

3M Epoxy Connectors feature a pre-radiused, zirconia ceramic PC ferrule designed to provide contact of fibers for low reflection and low insertion loss. The 3M epoxy SC and FC connectors are intermateable within NTT specifications. These connectors are built to exacting ferrule length tolerances for maximum machine polish yield and bulk packaged to maximize factory cable assembly efficiency. 3M Epoxy Connectors can also be used with an anaerobic adhesive for fast-cure interconnect applications.



3M™ Epoxy SC Connector

### Features and Benefits

3M™ Epoxy SC, ST and FC Connectors	
Pre-radiused PC ferrule	Fiber centered in radius; improved performance; designed to provide contact of fibers; low reflection; consistent performance; excellent transmission performance
Pull-proof (independent) ferrule	Designed to maintain optical contact (FC, SC)
High strength thermoplastic housing	Virtually eliminates flaking; resists corrosion (FC, SC)

### 3M™ Epoxy Connector Specifications

Connector Type	Multimode		Singlemode		
	SC	FC	SC	FC	SC & FC/APC
Product Number	6306	6202	8306	8203	8306   8206/APC
Insertion loss (dB) Typical	0.2	0.2	0.2	0.2	0.2
Reflectance (dB) Typical	<-25	<-25	<-40	<-40	<-65
Operating temperature range	-10° to 60°C	-10° to 60°C	-40° to 75°C	-40° to 75°C	-40° to 75°C
Storage temperature	-40° to 85°C	-40° to 85°C	-40° to 85°C	-40° to 85°C	-40° to 85°C
<b>Material</b>					
Connector ferrule	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic	Zirconia ceramic
Connector housing and body	Engineered resin	Engineered resin	Engineered resin	Engineered resin	Engineered resin
Boot	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer	Thermoplastic elastomer

See “Termination Kits” section for 3M Epoxy Connector termination tools.

### 3M Epoxy Connector Ordering Information

Product Number	Connector Type	Package	Min. Order	3M ID
6306-B	MM Epoxy SC Connector ceramic, black boot	1/bag, 60/carton	60 each	80-6109-9247-3
6306-BE	MM Epoxy SC Connector ceramic, beige boot	1/bag, 60/carton	60 each	80-6107-6501-0
6202	MM Epoxy FC/PC Connector ceramic	1/bag, 60/carton	60 each	80-6107-6540-8
8306	SM Epoxy SC Connector ceramic	1/bag, 60/carton	60 each	80-6107-6498-9
8306-SC/APC	SM Epoxy SC/APC Connector ceramic	1/bag, 60/carton	60 each	80-6111-6899-0
8203	SM Epoxy FC/PC Connector ceramic	1/bag, 60/carton	60 each	80-6107-6537-4
8206-FC/APC	SM Epoxy FC/APC Connector ceramic	1/bag, 60/carton	60 each	80-6111-6900-6

Note: MM - Multimode; SM - Singlemode

# 3M Termination Kits

For simple, all-in-one field solutions, look no further than 3M Termination Kits. These kits provide the tools and materials necessary to terminate 3M fiber optic connectors.

## 3M™ Crimplok™+ Connector Kits

3M™ Crimplok™+ Connector Kits 8765T-UPC/8765T-APC provide the tools needed to terminate 3M Crimplok+ Connectors 8700-UPC 6700 and 8700-APC series, respectively. Both kits contain the same fiber preparation tools including a high quality cleaver, a work surface and a case with an integrated hook for easy hanging. Each kit contains a specific 3M™ Crimplok™+ Activation Tool and 3M™ Crimplok™+ Nano Finishing Tool, depending upon the connector type. UPC tools provide a square finish while APC tools provide a 8° angled finish.



3M™ Crimplok™+ SC/UPC Connector Kit 8765T-UPC  
for 3M™ Crimplok™+ Connectors 8700-UPC and 6700 Series



3M™ Crimplok™+ SC/APC Connector Kit 8765T-APC  
for 3M™ Crimplok™+ Connectors 8700-APC

## 3M™ Crimplok™+ Connector Kit Ordering Information

Product Number	Description	Packaging	3M ID
8765T-UPC	Crimplok+ SC/UPC Connector Kit	1 kit	80-6116-2245-9
8765T-UPC/ 250-900-JKT	Crimplok+ SC/UPC Field Termination Kit for 250/900um and Jacketed connectors	1 kit	80-6116-2252-5
8765T-APC	Crimplok+ SC/APC Connector Kit	1 kit	80-6116-2214-5
8765T-APC/ 250-900-JKT	Crimplok+ SC/APC Field Termination Kit for 250/900um and Jacketed connectors	1 kit	80-6116-2251-7

## Replacement Parts for 3M™ Crimplok™+ Connector Kits

Product Number	Description	Packaging	3M ID
8765-AT/UPC	Crimplok+ SC/UPC Activation Tool	1/package	80-6116-2199-8
8765-AT/APC	Crimplok+ SC/APC Activation Tool	1/package	80-6116-2190-7
8765-NF/UPC	Crimplok+ SC/UPC Nano Finishing Tool	1/package	80-6113-8075-1
8765-NF/APC	Crimplok+ SC/APC Nano Finishing Tool	1/package	80-6113-8096-7
2534	Fiber cleaver (flat cleave)	1/package	80-6113-2377-7
6362-TH	Tri-hole fiber stripping tool	1/package	80-6113-3936-9
6365-KS	Aramid yarn fiber snips	1/package	80-6113-0462-9
05-00017	Lint free cloths	100 sheets/pk	80-6104-4324-6
8765-CS	Crimplok+ cleaning swabs (100 count)	1/package	80-6113-8754-1

## 3M™ No Polish Connector Kits

3M™ No Polish Connector Kits provide the tools and materials needed to terminate singlemode and multimode SC, LC and ST flat splice no polish connectors. The 3M™ No Polish Connector Premium Kit with Cleaver 8865-C/PR has the tools of the regular 8865-C kit, but in a larger case with a work surface, fiber shard container, tweezers, brush and lint-free wipes in a tub.

The 3M™ Fiber Optic Angle Cleave Kit 2565 provides the tools necessary to terminate 3M™ No Polish LC/APC and SC/APC Angle Splice Connectors. The 3M™ Fibrlok™ Angle Splice Assembly Tool 2501-AS is also included to terminate 3M™ Fibrlok™ Angle Splices. Replacement parts are available.



3M™ Fiber Optic Angle Cleave Kit 2565



3M™ No Polish Connector Kit 8865-C



3M™ No Polish Connector Premium Kit with Cleaver 8865-C/PR

## 3M™ No Polish Connector Kit Ordering Information

Product Number	Description	Package	3M ID
8865-C	No Polish Connector Kit with cleaver	1 kit	80-6113-2379-3
8865	No Polish Connector Kit (no cleaver)	1 kit	80-6113-2378-5
8865-C/PR	No Polish Connector Premium Kit with cleaver	1 kit	80-6113-8783-0
8865/PR	No Polish Connector Premium Kit (no cleaver)	1 kit	80-6114-8296-1
2565	Fiber optic angle cleaver kit with angle cleaver	1 kit	80-6113-2508-7

## Replacement Parts for 3M™ No Polish Connector Kit

Product Number	Description	Package	3M ID
2534	Fiber Optic Cleaver	1 each	80-6113-2377-7
2535	Fiber Optic Angle Cleaver	1 each	80-6113-2423-9
8835-AT	No Polish LC Connector Assembly Tool	1 each	80-6113-2797-6
8845-AT	No Polish ST Connector Assembly Tool	1 each	80-6113-9519-7
8865-AT	No Polish SC Connector Assembly Tool	1 each	80-6113-2630-9
6362-TH	Tri-hole fiber stripping tool	1 each	80-6113-3936-9
6365-KS	Aramid yarn fiber snips	1 each	80-6113-0462-9
05-00017	Lint free cloths	100 sheets/pk	80-6104-4324-6

## 3M™ Hot Melt Termination Kits

3M™ Hot Melt Termination Kits 6366 (120V oven) and 6362 (230V oven) contain the tools and materials necessary to terminate 3M™ Hot Melt SC, ST, and FC Connectors, both singlemode and multimode. The 3M™ LC Hot Melt Expansion Kit 6650-LC is used in addition to the 6366/6362 hot melt termination kits to terminate 3M™ Hot Melt LC Connectors.



3M™ Hot Melt Termination Kits 6366 and 6362-230V



3M™ Hot Melt LC Expansion Kit 6650-LC

## Features and Benefits

3M™ Hot Melt Termination Kits	
Microscope with oblique and coaxial lighting	Better dual view of fiber end face inspection
Roll-up tool pouch	Tools are organized and accessible
Universal hot melt holders	Fewer parts to carry, holds cable more securely
Instruction CD	Organized into video segments for quick reference

## 3M Hot Melt Termination Kit Ordering Information

Product Number	Description	Packaging	3M ID
6366	Hot Melt Termination Kit for ST, FC, SC Hot Melt Connectors, 120V	1 each	80-6113-2599-6
6362-230V	Hot Melt Termination Kit for ST, FC, SC Hot Melt Connectors, 230V	1 each	80-6113-2598-8
6650-LC	Hot Melt LC Expansion Kit	1 each	80-6113-1353-9

## 3M Hot Melt Accessories Ordering Information

Product Number	Description	Packaging	3M ID
6365-CC	Hot Melt Consumable Kit for ST, SC, FC	1 each	80-6113-0452-0
	Lapping film, 2 µm (254X)	200 sheets	80-6104-4324-6 80-6110-0932-7
	Lapping film, (263X) final polish	50 sheets	
	Lint free cloth tub	200 sheets	
8892 Universal Polishing Jig	1 each		
6191	Hot Melt Cooling Stand	1 each	80-6106-2569-3
6650-LS	LC Lapping Film Singlemode Consumable Kit (polishes 400 connectors)	1 each	80-6113-1472-7
	Lapping film, 9 µm (461X)	20 sheets	
	Lapping film, 2 µm (254X)	100 sheets	
	Lapping film, 0.5 µm (661X)	40 sheets	
	Lapping film, final polish (863XW)	80 sheets	
6650-LM	LC Lapping Film Multimode Consumable Kit (polishes 400 connectors)	1 each	80-6113-1473-5
	Lapping film, 9 µm (461X)	20 sheets	
	Lapping film, 2 µm (254X)	100 sheets	