



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





860L Series

Miniature-Size DIN Video Patch Cords




Product Description

New 860L Series Miniature-Size DIN Video Patch Cords feature a new miniature Patch Plug with a 0.200" dia. body and 0.035" dia. male center contact. Patch Cords are available in a variety of lengths and colors and mate to KINGS® new Miniature-Size DIN Video Jacks and Jackfields.



- 860L Series Miniature-Size DIN Video Patch Cords are made with Belden 1855A precision 75 Ohm video cable providing unsurpassed performance and reliability.



- Patch Cords feature molded black strain relief boots with a choice of 10 different cable jacket colors for signal identification and customization.



- Patch Cords are available in 10 standard lengths. Custom cord lengths are also available.
- 75 Ohm Miniature-Size Patch Plugs are made with precision machined components designed to provide long-term durability, reliability, and performance.

Specifications

Material


Body, Contact: Brass
 Ferrule: Commercial Bronze
 Insulators: Teflon®
 Cable Boot: Buna N Rubber
 Cable: Belden 1855A

Electrical


Impedance: 75 Ohms
 Frequency Range: DC – 3 GHz

Finishes

Body: Nickel over Copper
 Contacts: Gold over Nickel

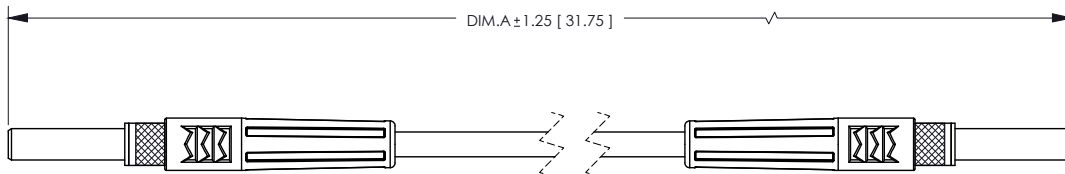

860L-860-XXX01YY

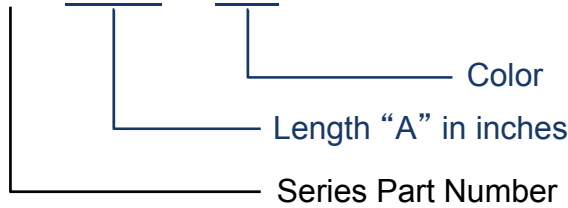

PART NUMBER	DIMA ± 1.25
860L-860-01201YY	12.00
860L-860-01801YY	18.00
860L-860-02401YY	24.00
860L-860-03601YY	36.00
860L-860-04801YY	48.00
860L-860-06001YY	60.00
860L-860-07201YY	72.00
860L-860-08401YY	84.00
860L-860-09601YY	96.00
860L-860-12001YY	120.00
860L-860-30001YY	300.00

YY	CABLE COLOR
-01	Brown
-02	Red
-03	Orange
-04	Yellow
-05	Green
-06	Blue
-07	Violet
-08	Grey
-09	White
-10	Black