



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!






Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




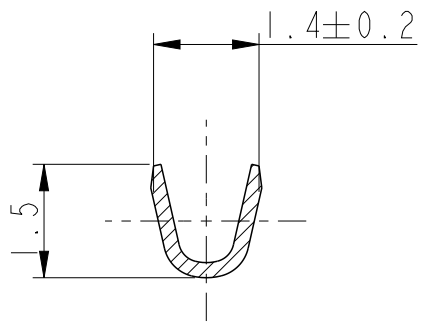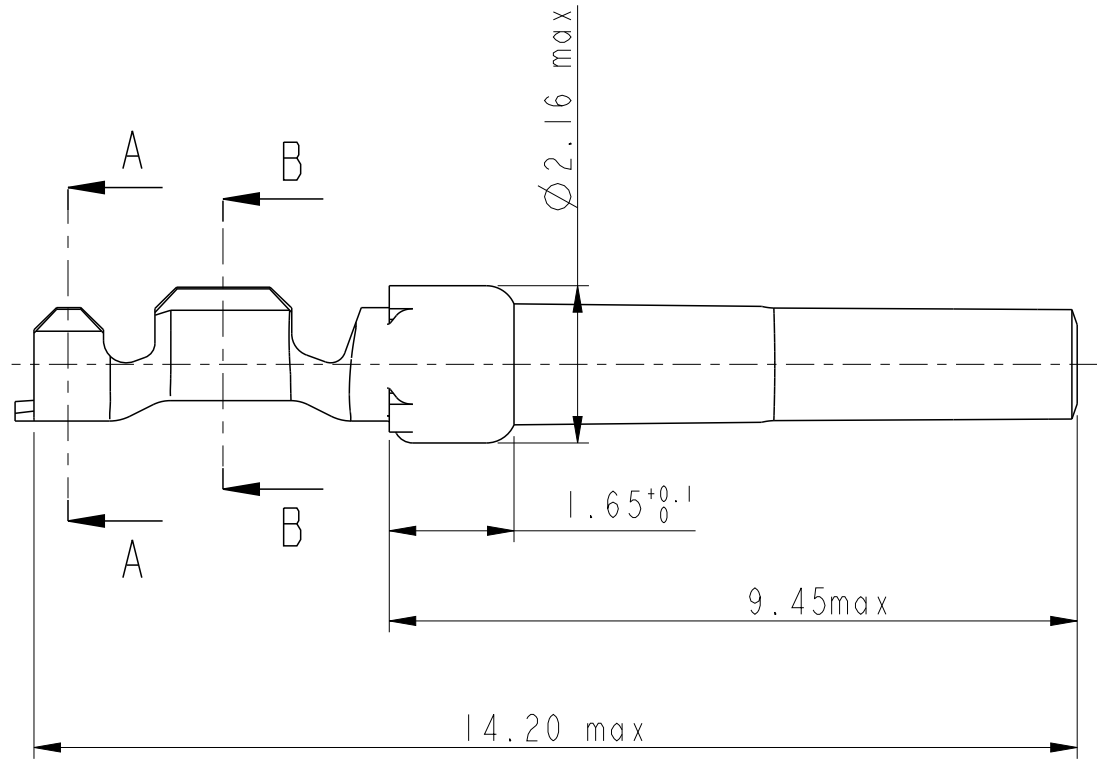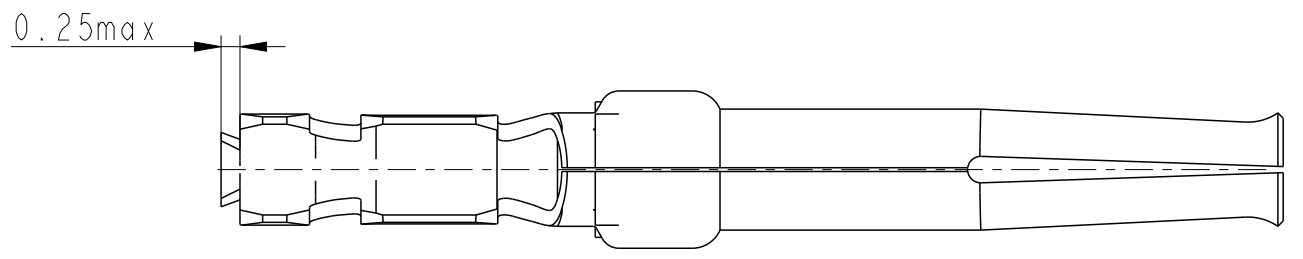

SECTION A-A

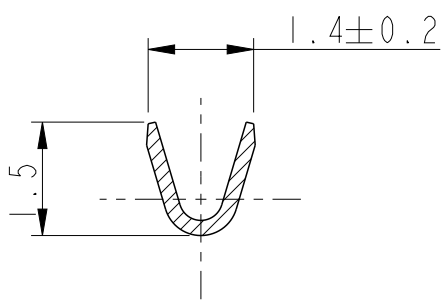

SECTION B-B






- NOTES:
- 1-Material:phosphor bronze,thickness 0.20
 - 2-Finish on contact area:see table
finish on termination:bright tin over nickel
 - 3-Wire range:24 to 28 AWG
 - 4-Max outer dia of wire insulator:1.02 mm
 - 5-Current carrying capacity per contact:
 - 3.Amps max when crimped to #24 AWG
 - 2 Amps max when crimped to #26 AWG
 - 1 Amps max when crimped to #28 AWG
 - 6-After 5 insertions into connector, contact retention must be 5 pounds axial load min
 - 7-When contact is crimped to 24 AWG,the insulation support crimped height must be 1.78 mm max to ensure a proper insertion into housing
 - 6-Packaging:BOX of 500 contacts

NOTE : ROHS INFORMATION
The LF products meet European union directives and other country regulations as described in GS-22-008
Terminations plating spec : 2um Nickel min + 2um Sn min
Packaging Spec : see GS-14-920

Core range	-
8656351064LF	Flash Au
8656351064	Flash Au
PART NUMBER	Plating

rev	ecn no	dr	date
E	LS06-196	MPE	27/11/2006
F	LS08-0127	MPE	2008/05/13
G	109-0152	AMR	2009-07-27
H	110-0070	AMR	2010-03-09
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		- ✓ tolerance std ISO 406 ISO 1101		projection 		mm 			
			TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	C JARRY	28/01/97	ANGULAR LINEAR		0.X		±0.3		size A3		Scale 10:1	
Eng					0.XX		±0.1					
Chr					0° ±2°		0.XXX		±0.05		ECN 110-0070	
Appr			Product family -						Spec ref			
			title CRIMP SOCKET #Wire 24-28 in bos 500 cts				dwg no C01-8656-1507				Rev. H	
			catalog no -						CUSTOMER		sheet 1 of 1	