



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



Standard relays in the RIDERSERIES RPW.

- 3 CO contacts
- Optionally AC or DC coils
- Mechanical operating display

**General ordering data**

Order No.	<a href="#">8690810000</a>
Type	RPW705730
Version	RIDERSERIES, Relais, No. of contacts: 3, CO contact, AgCdO, Rated control voltage: 230 V AC, Continuous current: 16 A, Plug-in connection
GTIN (EAN)	4032248361397
Qty.	25 pc(s).

**RIDERSERIES**  
**RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Ratings**

Conductor connection system	Plug-in connection	Humidity	40 °C / 93 % rel. humidity, no condensation
Weight	81 g	UL 94 flammability rating	V-0

**Dimensions and weights**

Width	38.5 mm	Height	35.5 mm
Depth	48.5 mm	Weight	81 g
Net weight	94.64 g		

**Temperatures**

Operating temperature	-45 °C...+50 °C	Storage temperature	-40 °C...+50 °C
-----------------------	-----------------	---------------------	-----------------

**Input**

Rated control voltage	230 V AC	Rated current AC	11.7 mA
Coil resistance	7,500 Ω ±10 %	Power rating	2.8 VA
Response / drop-out voltage AC coil	184 V / 69 V	Status indicator	Mechanical

**Output**

Rated switching voltage	400 VAC	Max. switching voltage, AC	440 V
Continuous current	16 A	making current	40 A / 20 ms
Max. switching power	6000 VA	Response time	15 ms / 10 ms
Min. switching power	24 V / 100 mA	Max. switching frequency at rated load	0.1 Hz

**Contact specifications**

No. of contacts	3	Contact design	CO contact
Contact material	AgCdO	Mechanical service life	20 x 10 <sup>6</sup> switching cycles

**Insulation coordination**

Rated voltage	250 V	Clearance and creepage distances for control side - load side	≥ 4 mm
Dielectric strength for control side - load side	2.5 KV <sub>eff</sub> / 1 min.	Impulse withstand voltage	4 kV (1.2/50 μs)
Protection degree	IP 20	Insulating material group	IIIa

**Other technical data**

Version	With lug, without test button	Status indicator	Mechanical
Free-wheel diode	No		

**Further details of approvals / standards**

Standards	IEC 61810-1, UL508
-----------	--------------------

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01
eClass 7.0	27-37-16-01		

**Approvals**




Approvals

**Downloads**Declaration of Conformity [K295\\_12\\_10.pdf](#)

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

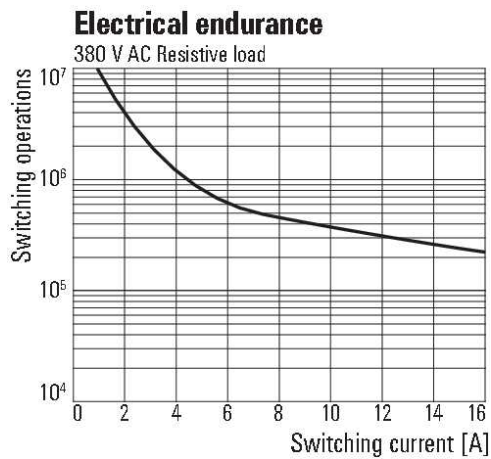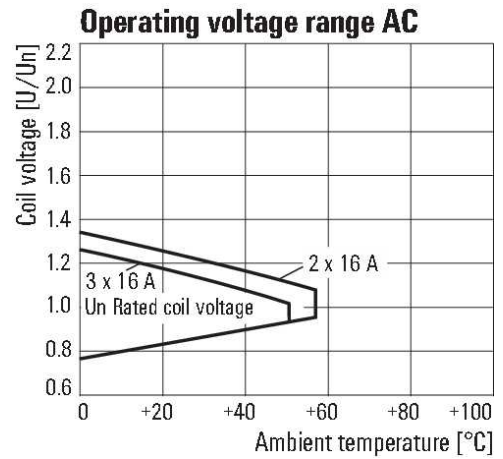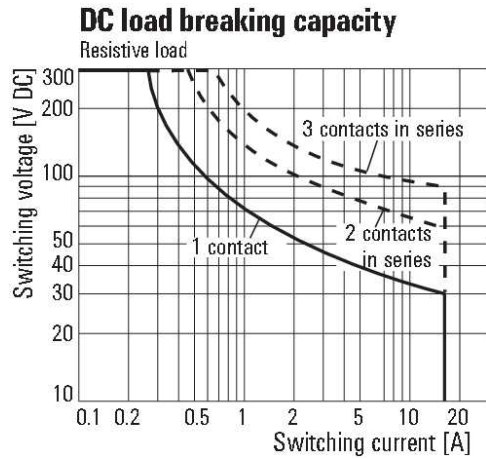

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

<b>Type code</b>	RPW				
<b>Typ</b>	RIDER PoWer				
<b>Contacts</b>	2 2 change-over contacts 7 3 change-over contacts				
<b>Type of construction</b>	0 Without test button 3 With test button				
<b>Housing</b>	2 Cap without lug, 4.8 mm Faston 5 Cap with lug, 6.3 mm Faston				
					<b>DC coil</b> 006 6 V DC 012 12 V DC 024 24 V DC 048 48 V DC 060 60 V DC 110 110 V DC <b>AC coil</b> 506 6 V AC 512 12 V AC 524 24 V AC 548 48 V AC 615 115 V AC 730 230 V AC