



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MICRO-Interface MI-A-PSM24Vdc

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

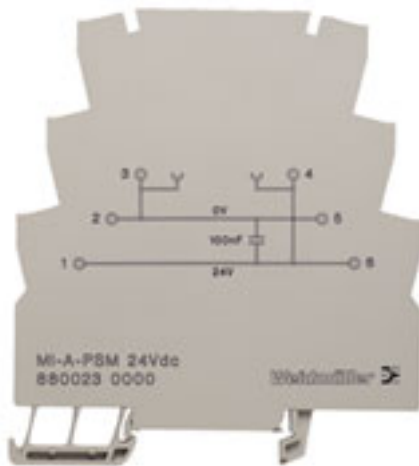

Specific adapter to be connected to the MICROSERIE RELAYS using a 10-pole flat-cable connector or 15-pole Sub-D connector.

General ordering data

Type	MI-A-PSM24Vdc
Order No.	8800230000
Version	Adapter, MICRO-Interface, IEC 60603/DIN41612 plug-in connectors, Screw connection
GTIN (EAN)	4032248497171
Qty.	10 pc(s).

Data sheet

**MICRO-Interface
MI-A-PSM24Vdc**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	88 mm	Width	6.1 mm
Height	97.8 mm	Net weight	32 g

Temperatures

Operating temperature	0...+50°C	Ambient temperature	0 °C...+50 °C
Storage temperature	-20...+85 °C		

Connection data

Connection on control side	IEC 60603/DIN41612 plug-in connectors	Number of poles (control side)	15-pole female
Supply voltage	max. 30 V AC/DC		

Ratings data

Operating voltage	30 V UC	Max. current per channel	0.5 A
Total operating current	2 A		

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	< 50 V AC
Surge voltage category	III	Pollution severity level	2
Insulation test voltage	0.35 kVAC		

Supply connection

Type of connection	Screw connection
--------------------	------------------

Classifications

ETIM 3.0	EC001121	eClass 6.2	27-24-22-08
eClass 7.1	27-24-22-08		

Product information

Descriptive text accessories	Cross-connectors and markers: see "Accessories"
------------------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

Data sheet**MICRO-Interface
MI-A-PSM24Vdc**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings**Electric symbol**