



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## JACKPAC JPP NPN PNP 24VDC

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



The JPP level converters convert NPN signals into PNP signals and vice versa. This guarantees optimum adaptation to existing circuits.

### General ordering data

Order No.	<a href="#">8852350000</a>
Type	JPP NPN PNP 24VDC
Version	JACKPAC, Level converter, Rated control voltage: 18...24...30 V DC, Rated switching voltage: 18...30 V DC, Rated switching current: 400 mA, M12 plug/socket, A-coded
GTIN (EAN)	4032248567355
Qty.	1 pc(s).

**JACKPAC  
JPP NPN PNP 24VDC**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Length	83 mm	Width	36 mm
Height	14.4 mm	Net weight	52 g

**Temperatures**

Operating temperature	0 °C...+60 °C	Storage temperature	-20 °C...+85 °C
-----------------------	---------------	---------------------	-----------------

**Control side**

Rated control voltage	18...24...30 V DC	Sensor	2-/ 3-Conductor Sensor NPN-type
Input current for sensor	< 200 mA		

**Load side**

Rated switching voltage	18...30 V DC	Rated switching current	400 mA
Voltage drop at max. load	≤ 1 V		

**General data**

Solid-state type	Solid state relay	No. of poles	1
Conductor connection system	M12 plug/socket, A-coded	Standards	DIN EN 50178, UL508

**Insulation coordination**

Rated voltage	32 V	Pollution severity	2
Surge voltage category	I		

**Further details of approvals**

Standards	DIN EN 50178, UL508
-----------	---------------------

**Classifications**

ETIM 3.0	EC001134	UNSPSC	30-21-18-01
eClass 5.1	27-27-09-90	eClass 6.0	27-27-09-90
eClass 7.0	27-27-09-90		

**Notes**

Notes

**Approvals**

Approvals

**Downloads**

Declaration of Conformity [K270\\_06\\_06.pdf](#)  
[3-D model](#)

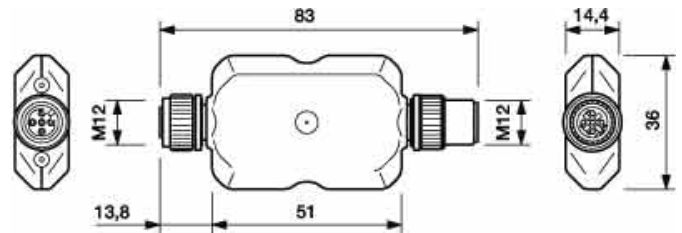
Creation date March 6, 2013 10:41:00 PM CET

Catalogue status 20.12.2012 / We reserve the right to make technical changes.

2

**JACKPAC  
JPP NPN PNP 24VDC**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings****Dimensioned drawing****Pinning**