



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



17.5 mm - 1 Relay 5A EMER8 Part number 88829198



- Multifunction or mono-function
- Multi-range (7 ranges)
- Multi-voltage or single voltage
- Screw terminals
- LED status indicator (1 voltage present LED, 1 timer ON LED)
- Option of supplying a load in parallel (EMER / EMYR)

Part numbers

| | Type | Packaging | Functions | Timing | Output | Nominal rating | Supply voltage |
|----------|-------|-----------|---|-----------|--------------------|----------------|-----------------------------|
| 88829198 | EMER8 | Per unit | A - At - B - C - D - Di - H - Ht - Pe - W | 0,1 →20 h | 1 changeover relay | 5 A NO | 12 →240 V DC / 24 →240 V AC |

Specifications

Timing

| | |
|--|--|
| Timing ranges (7 ranges) | 0.1 s →1 s / 1 →10 s / 6 →60 s / 1 →10 min / 6 →60 min / 1 →10 h / 2 →20 h |
| Repetition accuracy with constant parameters | ± 0,5 % |
| Drift Temperature | ± 0,05 %/ °C |
| Drift Voltage | ± 0,2 %/V |
| Display accuracy according to IEC/EN 61812-1 | ± 10 % / 25 °C |
| Minimum pulse time | 30 ms |
| Maximum reset time by denegerisation | 100 ms |

Supply

| | |
|--|---|
| Multi-voltage power supply | EMAR2 : 110-120 VAC EMAR7 : 240 VAC EMAR9 : 24 VAC/DC EMER8/EMYR8 : 12 →240 VDC / 24 →240 VAC |
| Operating range | EMAR2 : 93 to 132VAC EMAR7 : -15 % + 10 % EMAR9 : 24 VAC - 15 % + 10 % / 24 VDC - 15 % + 20 % EMER8/EMYR8 : -15 % + 10 % |
| Frequency (Hz) | 50 / 60 Hz ± 5 % |
| Max. absorbed power | EMAR2 : approx. 3,2 VA 110 VAC EMAR7 : approx. 3,2 VA 230 VAC EMAR9 : approx. 1,2 VA (0,6 W) / 24 VAC (DC) EMER8/EMYR8 : approx. 3,2 VA (1,5 W) / 230 VAC (DC) Approx. 1,2 VA (0,6 W) / 24 VAC (DC) |
| Immunity from micro power cuts : typical | > 10 ms |

Output specification

| | |
|-------------------------------------|--|
| Changeover relay | 1 NO : 1250 VA / 150 W 1 NC : 750 VA / 90 W |
| Maximum breaking current | NO : 5 A 250 VAC / 5 A 30 VDC resistive NC : 3 A 250 VAC / 3 A 30 VDC resistive |
| Minimum breaking current | 10 mA / 12 VDC |
| Voltage breaking capacity | 277 VAC / 30 VDC |
| Electrical life (operations) | 10 ⁵ NO cycles 7 x 10 ⁴ cycles |
| Mechanical life (operations cycles) | 5 x 10 ⁶ |

General characteristics

| | |
|---|--|
| LED display | Green : voltage present Yellow : timer R ON |
| Fixing : Symmetrical DIN rail | 35 mm |
| Protection (IEC/EN 60529) | Casing : IP40 Connection terminals : IP20 |
| Terminal capacity Multi-wire with ferrule | 1 x 0,5 →4 mm ² (AWG 20 →AWG11) 2 x 0,5 →2,5 mm ² (AWG 20 →AWG14) |
| Terminal capacity Single-wire without ferrule | 1 x 0,5 →2,5 mm ² (AWG 20 →AWG14) 2 x 0,5 →1,5 mm ² (AWG 20 →AWG16) |
| Stripping length (mm) | 5 mm |
| Max. tightening torques IEC/EN 60947-1 | 0,6 →0,8 Nm |
| Temperature limits use (°C) | -20 °C →+60 °C |
| Temperature limits stored (°C) | -40 °C →70 °C |



| | |
|---|---|
| Relative humidity no condensation acc. to IEC/EN 60068-2-30 | 93 % |
| Vibration resistance according to IEC/EN 60068-2-6 | 10 →55 Hz, A = 0.35 mm peak to peak 10 x cycles, 1 octave/min |
| Weight (g) | 60 |

Standard

| | |
|--|--|
| Certifications | CE - cUL |
| Conforming to standards (directives BT and CEM) | IEC/EN 61812-1 IEC/EN 61000-6-2 IEC/EN 61000-6-3 IEC/EN 61000-6-4 |
| Conformity with environmental directives | 2002/95/CE : RoHS 1907/2006 : Reach |
| Immunity to electrostatic discharges acc. IEC/EN 61000-4-2 | Level III air ± 8 kV / contact ± 4 kV |
| Immunity to radiated, radio-frequency, electromagnetic field acc. IEC/EN 61000-4-3 | Level III 10 V/m (80 M Hz →1 G Hz) 80 % AM (1 K Hz) 3 V/m (1.4 →2 G Hz) 80 % AM (1 K Hz) 1 V/m (2 →2.7 G Hz) 80 % AM (1 K Hz) |
| Immunity to rapid transient bursts acc. to IEC/EN 61000-4-4 | Level III Direct ± 2 kV (power supply) Coupling ± 1 kV (I/O) |
| Immunity to shock waves on power supply acc. to IEC/EN 61000-4-5 | Level III Power supply/earth ± 2 KV Power supply input ± 1 KV |
| Immunity to radio frequency in common mode acc. to IEC/EN 61000-4-6 | Level III 10 V (0.15 →80 M Hz) 80 % AM (1 K Hz) |
| Immunity to magnetical field acc. (IEC/EN 61000-4-8) | 50, 60 Hz 30 A/m, 1 min. |
| Immunity to voltage dips and breaks acc. to IEC/EN 61000-4-11 | 0 % residual voltage / 1 cycle 40 % residual voltage / 10 cycles (50 Hz) / 12 cycles (60 Hz) 70 % residual voltage / 25 cycles (50 Hz) / 30 cycles (60 Hz) |
| Mains-borne and radiated emissions acc. to IEC/EN 61000-6-3 | Class B |

Insulation


| | |
|--|--|
| Insulation voltage | 250 V |
| Insulation coordination (IEC/EN 60664-1) | Category III, degree of pollution 3 ; up to 2000 m |
| Shock waves | 2,5 KV (1,2 / 50 µs) |
| Breakdown voltage conforming to IEC/EN 61812-1 | 2 KV / 1 min / 1 mA / 50 Hz |
| Insulation resistance | > 500 MΩ / 250 V DC / 1 min |

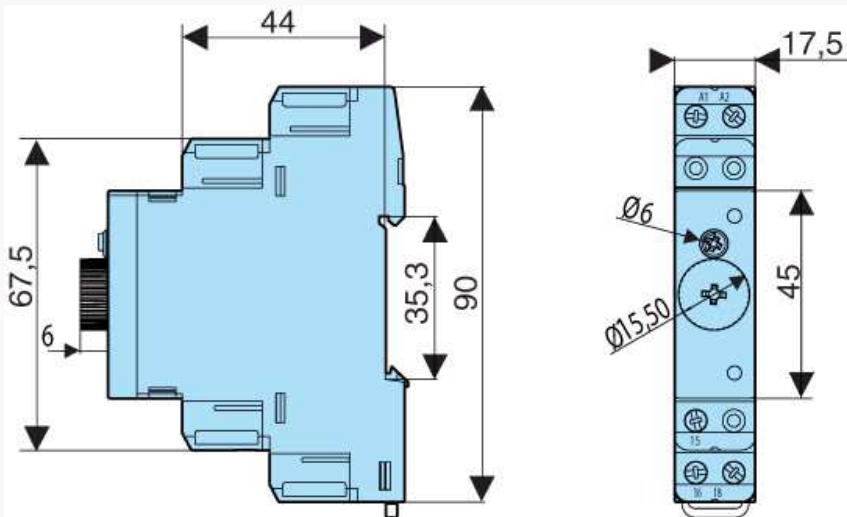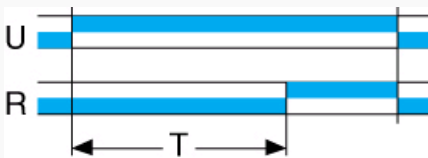Dimensions (mm)**Curves****A function****Function A**

Delay on energisation 1 relay

Curves

At function

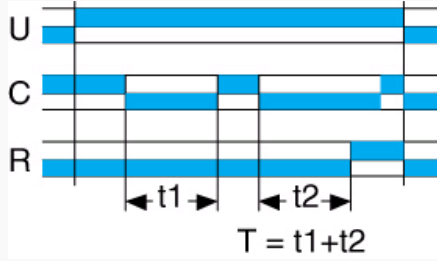


Function At

Timing on energisation with memory 1 relay

Curves

B function

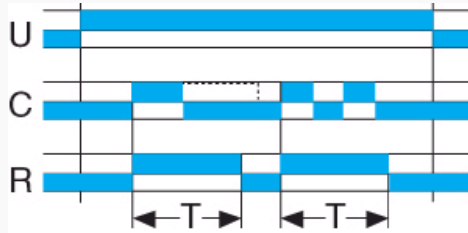


Function B

Timing on impulse one shot 1 relay

Curves

C function

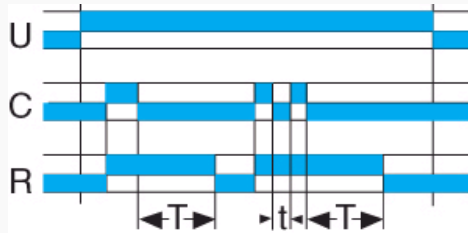


Function C

Timing after impulse 1 relay

Curves

D function

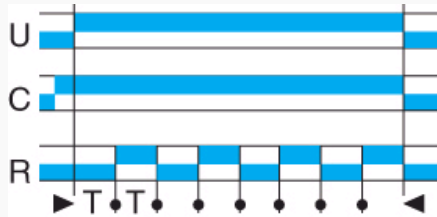


Function D

Flip-flop Pause start 1 relay

Curves


Di function

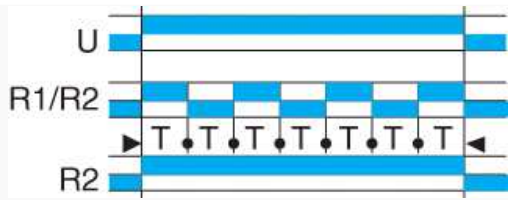

Function Di
 Flip-flop Pulse start 1 relay

Curves


H function

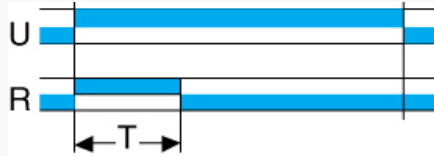

Function H
 Timing on energisation 1 relay

Curves


Ht function

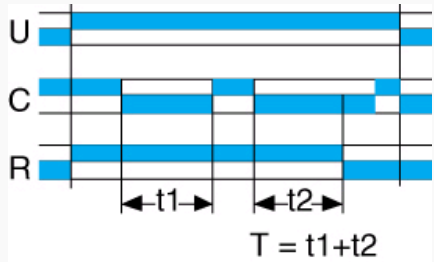

Function Ht
 Delay on energisation with memory 1 relay

Curves


Pe function

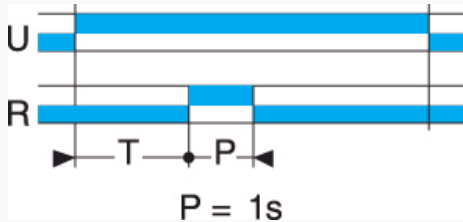

Function Pe
 Impulse counter (delay on) 1 relay

Curves

W function

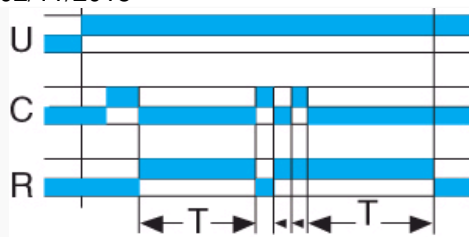**Function W**

Timing after pulse on control contact 1 relay

Connections

EMER8 - EMYR8

